GIE — CROP-CIRCLE BLUEPRINT 001

MILK HILL 2001 — MEASURED GEOMETRIC RECONSTRUCTION | GIE-BP-CC-001 | Revision 1.0 | 11 August 2026

Founder: Lawrence Herber | Geometric Intelligence Engine (GIE) |

1. Evidentiary Status

This record uses the supplied Milk Hill photograph and keeps the documented 409-circle formation separate from the 361 components measurable in the available thumbnail-resolution image. No missing measurements are fabricated.

2. Blueprint Visual — Measurement-to-Geometry Flow

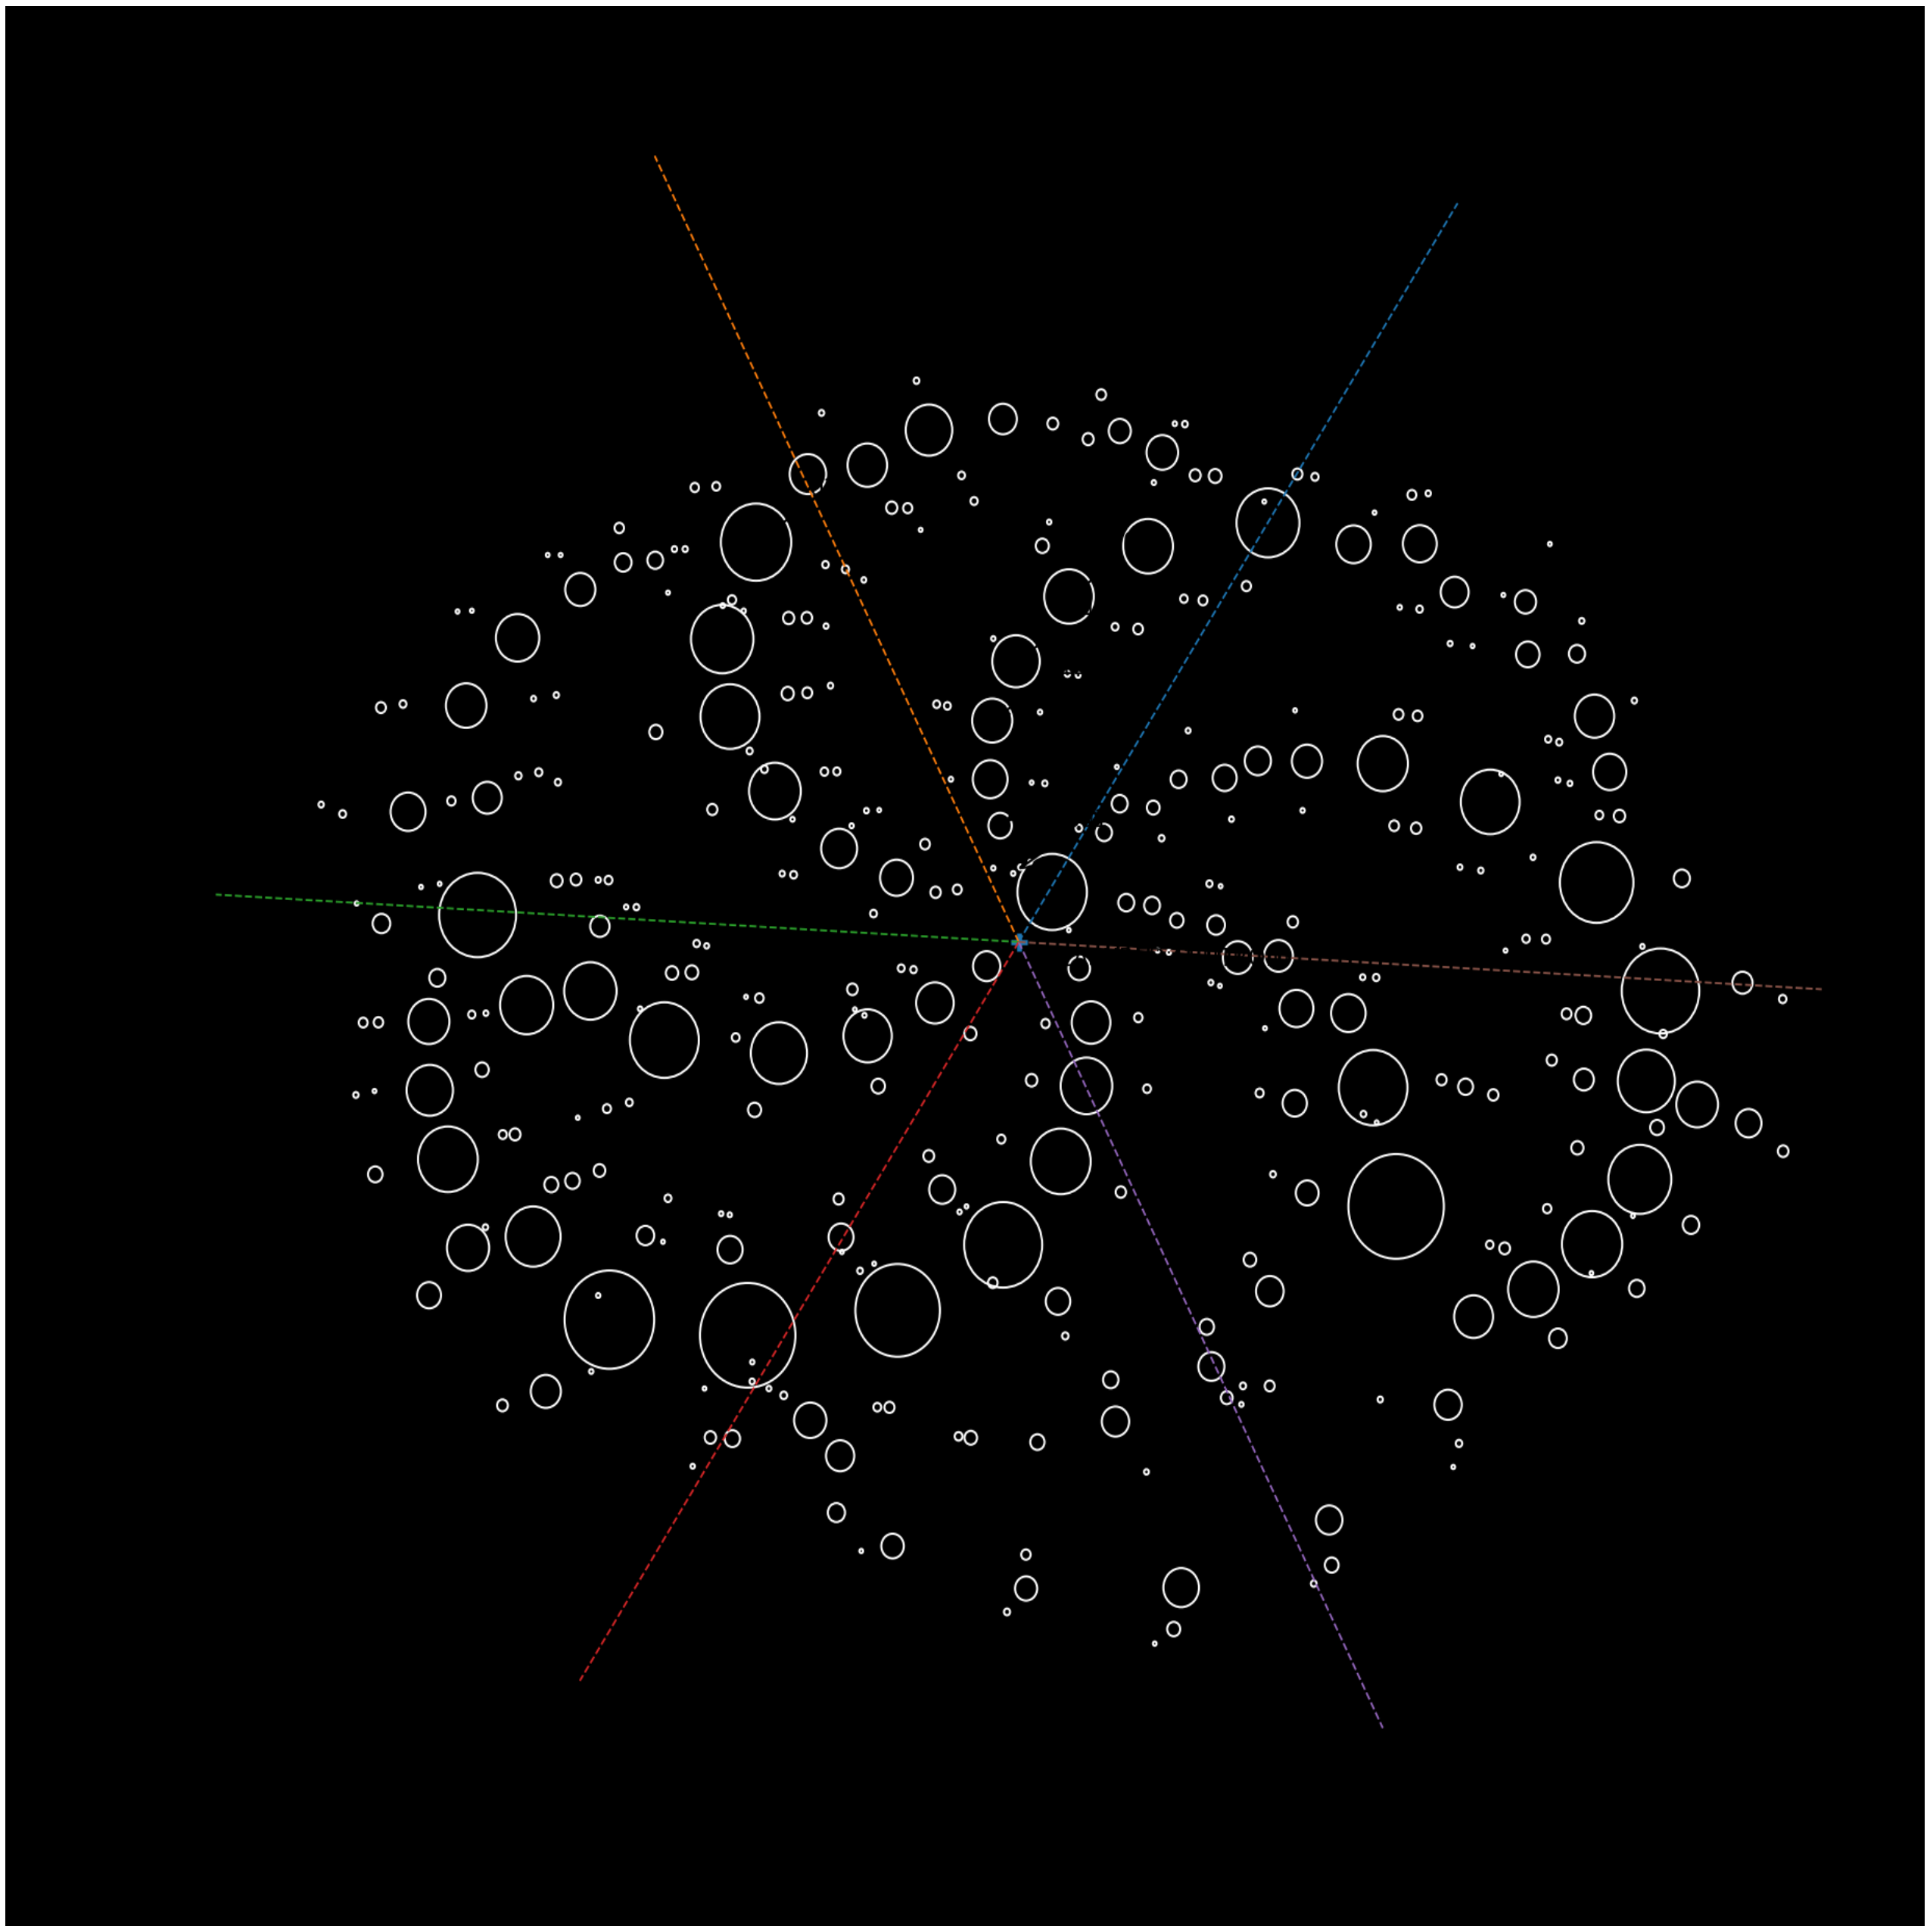

Numbered arrows identify example measured components. The same sequence identifier carries through the measurement table, normalized polar geometry, sector/rank assignment, diameter sequence and binary test.

3. Image Segmentation

RGB was converted to HSV. A pixel entered the bright-component mask when its value channel exceeded 199. Eight-connected components were retained for area 3–3000 px with both bounding-box dimensions below 100 px.

```
M(x,y) = 1 if V(x,y) > 199; otherwise 0
```

```
Equivalent diameter: d_i = 2 sqrt(A_i / pi)
```

Recovered measurable components: 361.

4. Coordinate Normalization

The oblique image was centered and whitened with covariance eigenvectors to reduce dominant elliptical perspective distortion without claiming full photogrammetric reconstruction.

```
p_i = [x_i, y_i]^T
```

```
q_i = Lambda^(-1/2) Q^T (p_i - mean(p))
```

```
r_i = sqrt(q_x,i^2 + q_y,i^2)
```

```
theta_i = atan2(q_y,i, q_x,i)
```

Image centroid: (478.326, 298.342) px. Covariance eigenvalues: 28740.616 and 16192.120.

5. Six-Sector Geometry

A phase offset was searched across one 60-degree interval. The selected phase minimized variance in the six component counts.

```
a_i = floor((((theta_i - phi) mod 2*pi) / (pi/3)))
```

Selected phase phi = 0.993458 rad = 56.921 degrees. Sector counts = [61, 60, 60, 57, 58, 65]. Count variance = 6.472222.

6. Fixed Binary Test

Within each sector, components were sorted from normalized center outward. The rule was fixed before interpretation.

```
b_i = 1 if d_i > d_(i-1); otherwise b_i = 0
```

The first component in each sector has no predecessor. 361 detected components therefore produce 355 bits.

First 120 bits:

```
10010011001010001001110101001001011111000011010010100100110110000011010101101010111011001001100101
101100110100100000001
```

7. Five-Bit Grouping

```
v = 16b1 + 8b2 + 4b3 + 2b4 + b5
```

For the transparent test, 1–26 map to A–Z, 0 to SPACE, and 27–31 remain control values. No values are altered to force words.

Direct measured output:

```
RLTIZRK[28]FRRMPMKJ[29]RNKLZHAJYMJZUVLKFSFUFCJZXKYEJTTR[28]TJRIVUJ[30]MKGNYJZRZYX V
```

Result: this fixed diameter-comparison encoding does not reproduce the earlier claimed English sentence. The negative result is retained because it distinguishes measured output from desired interpretation.

8. Deduction Chain

Measured component -> proportional image coordinate -> normalized radius/angle -> six-sector arm -> center-outward rank -> equivalent-diameter sequence -> fixed binary comparison -> five-bit decimal test.

The complete 361-row measurement dataset is the controlling numerical table for this image-derived record.