


POWER: 24V in -> 5V buck -> 3V3 LDO

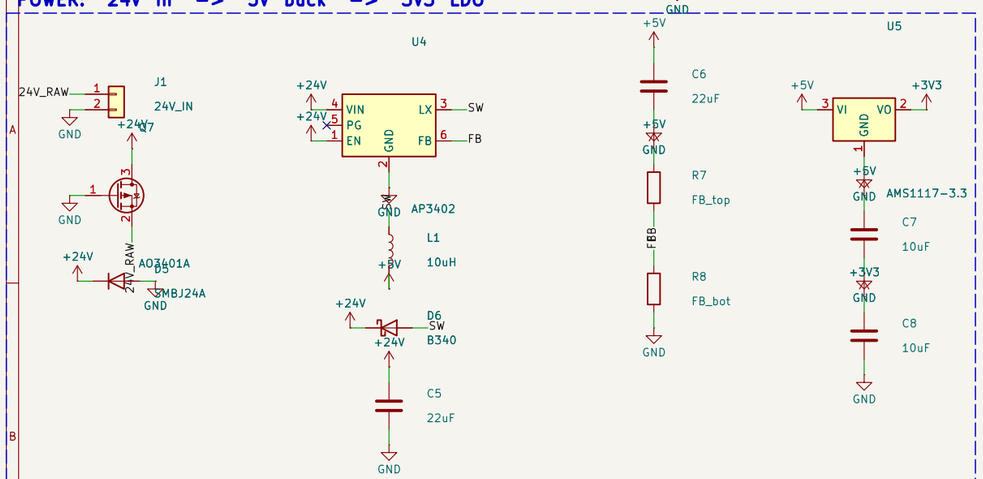


ESP32-S3 MCU + PROGRAM / USB HEADER

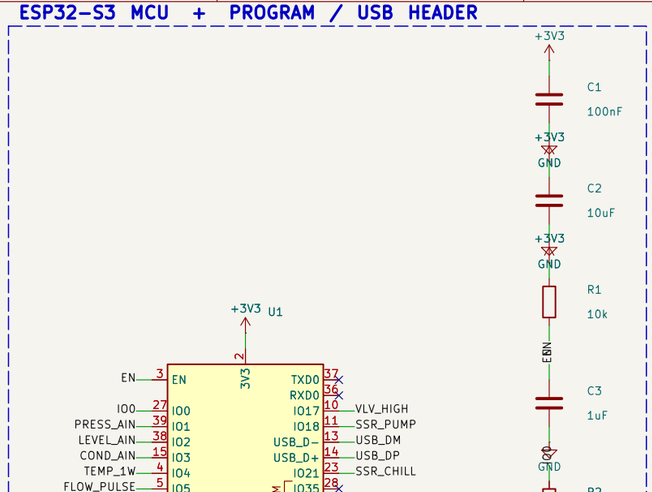


CAN-FD: MCP2518FD + TJA1051 xcvr

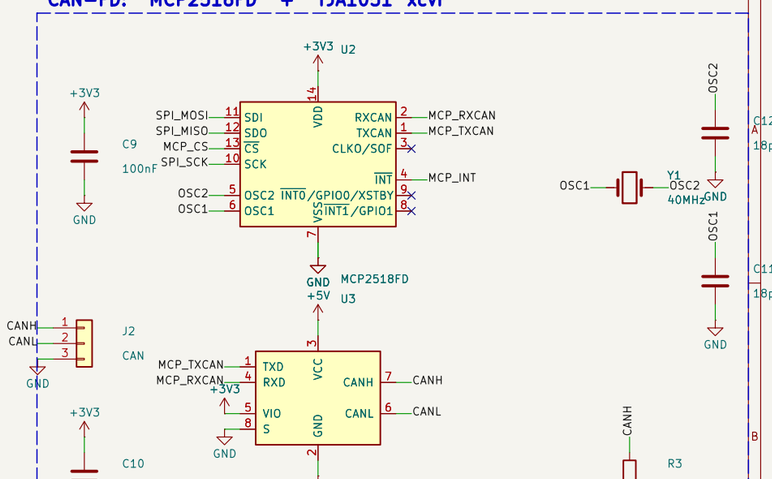


FLUSH SOLENOID DRIVERS (low-side N-FET)

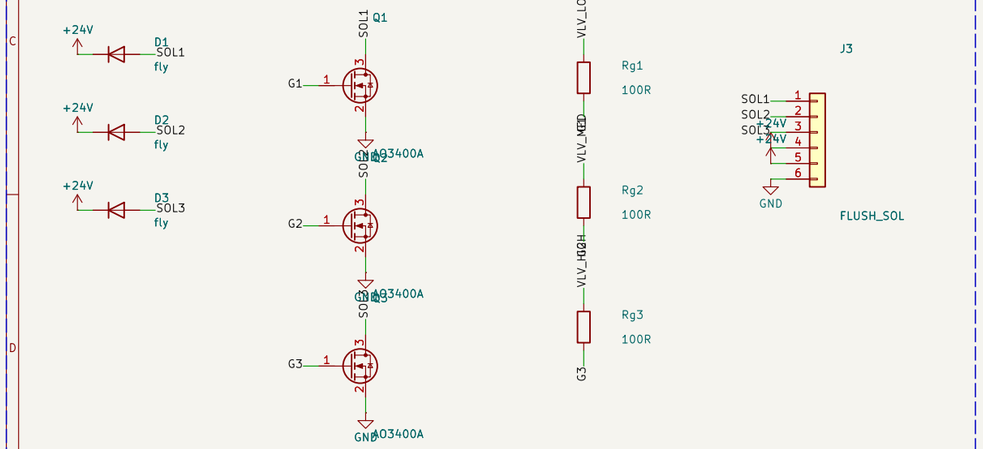

PUMP / CHILLER / DEIONISER (SSR drive)

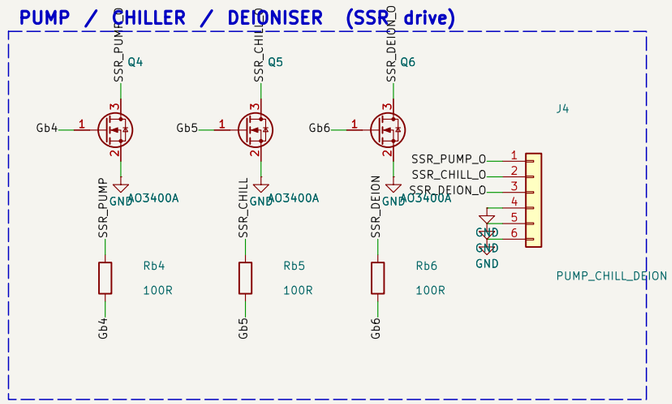

ANALOG + DIGITAL SENSORS

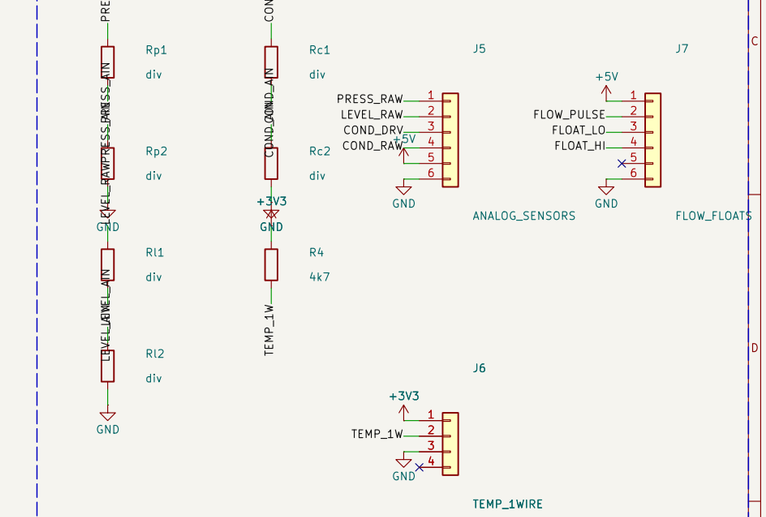

Microspark
Sheet: /
File: MS-DIEL-CTRL.kicad_sch

Title: MS-DIEL-CTRL Dielectric / Coolant CAN-FD Controller

Size: A3	Date: 2026-06-16	Rev: A
KiCad E.D.A. 10.0.3		Id: 1/1