UNIVERSITÀ DEGLI STUDI DI MILANO

FACOLTÀ DI SCIENZE E TECNOLOGIE

FACOLTÀ DI SCIENZE POLITICHE,
ECONOMICHE E SOCIALI

*Master Degree in Data Science for Economics*

# THESIS TITLE

**Supervisor:** Prof. Luca ROSSINI

**Co-supervisors:** Prof. Maria Fernanda PINTADO SERRANO

Thesis by:
Leila CIELOK
Student ID: 65522A

Academic Year 2026/2027

*<exergo - dedicate>*

# Aknowledgments

ACKNOWLEDGMENTS

# Contents

**Aknowledgments** **iii**

**1 Introduction** **2**

1.1 Research Question . . . . . 2

1.2 Contributions . . . . . 2

1.3 Thesis structure . . . . . 3

**2 Literature review** **4**

2.1 Section 1 . . . . . 4

2.2 Section 2 . . . . . 4

2.2.1 Subsection 2.1 . . . . . 4

**3 Data and network construction** **5**

3.1 Data sources . . . . . 5

3.1.1 LNG trade and infrastructure data . . . . . 6

3.1.2 Maritime routes and chokepoint data . . . . . 8

3.2 Data preparation . . . . . 12

3.2.1 Terminal infrastructure characteristics . . . . . 13

3.2.2 Temporal aggregation . . . . . 14

3.3 Dynamic network construction . . . . . 14

3.3.1 Nodes and edges . . . . . 15

3.3.2 Node activity . . . . . 16

3.4 Construction of node-level measures . . . . . 17

3.4.1 Terminal criticality measures . . . . . 17

3.4.2 Chokepoint criticality measures . . . 21
3.4.3 Common structural indicators . . . 23
3.5 Construction of the model-ready panels . . . 25
3.5.1 Node activity panel . . . 26
3.5.2 Terminal criticality panel . . . 27
3.5.3 Chokepoint criticality panel . . . 27
3.6 Data and methodological limitations . . . 28

**4 Exploratory network analysis 30**
4.1 Network evolution . . . 31
4.2 Node activity and temporal sparsity . . . 32
4.3 Terminal network position . . . 34
4.3.1 Terminal roles and trade activity . . . 34
4.3.2 Centrality, concentration and dependence . . . 35
4.4 Chokepoint network position . . . 40
4.4.1 Flow exposure . . . 40
4.4.2 Centrality measures . . . 41
4.5 Structural position of nodes . . . 43
4.6 Associations and modelling implications . . . 46

**5 Bayesian Reduced-Rank Model for Network Measures 49**
5.1 Modelling objective and scope . . . 49
5.2 Estimation samples . . . 50
5.2.1 Terminals . . . 50
5.2.2 Chokepoints . . . 50
5.3 Responses and covariates . . . 50
5.4 Static rank-one factor specification . . . 52
5.4.1 Prior distributions . . . 53
5.4.2 Posterior sampling and diagnostics . . . 55
5.5 Terminal posterior analysis . . . 56

5.5.1 Covariate associations . . . . . 56
5.5.2 Response relationships and factor interpretation . . . . . 57
5.5.3 Posterior predictive assessment . . . . . 58
5.6 Chokepoint posterior analysis . . . . . 61
5.6.1 Covariate associations and response relationships . . . . . 61
5.6.2 Posterior predictive assessment . . . . . 62
5.7 Prior assessment and sensitivity analysis . . . . . 64
5.7.1 Alternative prior specifications . . . . . 64
5.7.2 Prior predictive assessment . . . . . 66
5.7.3 Posterior sensitivity and predictive robustness . . . . . 67
5.8 Implications and limitations . . . . . 70

**6 Results and discussion** **74**

**7 Conclusions and future work** **75**

**A Chokepoint geometry registry** **76**

**B Sensitivity analysis of chokepoint assignments** **79**
B.1 Purpose and method . . . . . 79
B.2 Sensitivity results . . . . . 79

**C Model-ready panels variables** **82**
C.1 Node activity panel . . . . . 82
C.2 Terminal criticality panel . . . . . 84
C.3 Chokepoint criticality panel . . . . . 87

**D Model specification and diagnostics** **90**
D.1 MCMC convergence diagnostics . . . . . 90
D.1.1 Trace plots . . . . . 90
D.1.2 Autocorrelation diagnostics . . . . . 96

# Abstract

ABSTRACT.

# Chapter 1

# Introduction

Background and Motivation

## 1.1 Research Question

Research problem: identifying how global lng maritime network nodes' criticality evolves in time, distinguishing the probability that a node is active from its criticality conditioned on being active.

1. How will the structure of the global LNG maritime network evolve between 2020 and 2024?

2. What characteristics determine the probability that a terminal or chokepoint will be operational in a given month?

3. Which latent dimensions collectively describe the various measures of criticality?

4. How do structural, infrastructural and dynamic characteristics influence the criticality of nodes?

5. How do the mechanisms of criticality differ between terminals and chokepoints?

## 1.2 Contributions

Empirical (new monthly lng maritime dataset), methodology (separation: activity vs conditional criticality), theoretical (multidimensionality of criticality).

## 1.3 Thesis structure

This thesis is structured as follows...

# Chapter 2

# Literature review

## 2.1 Section 1

Global LNG Maritime trade networks: LNG organization, description of nodes' roles and routes.

## 2.2 Section 2

Potential subsections:

Criticality and Vulnerability in network analysis: comparison of importance, centrality, criticality, vulnerability, network science measures' roles.

Dynamic and temporal networks: temporal dependence, nodes inactivity and persistence.

Statistical models for sparse network processes: hurdle models

Bayesian reduced-rank models: multivariate bayesian models, shrinkage...

Research gap: combine dynamicity, multidimensional criticality, terminals and chokepoints analysis together

### 2.2.1 Subsection 2.1

# Chapter 3

# Data and network construction

This chapter describes the data sources and processing steps used to construct the dynamic LNG maritime network analysed in this thesis. The final dataset combines observed LNG tanker voyages, import and export terminals, reconstructed maritime routes, and the strategic chokepoints traversed by those routes. Together, these components represent the global LNG transportation system as a directed and weighted network evolving at a monthly frequency from January 2020 to December 2024.

The construction process involved harmonising the source data, matching observed voyages to their departure and arrival terminals, reconstructing the corresponding maritime routes, identifying the chokepoints crossed by each route, and aggregating trade flows and network relationships at the monthly level. The resulting dataset contains the nodes, connections, flow volumes, route characteristics, and infrastructure attributes required for the descriptive and Bayesian analyses developed in the following chapters.

## 3.1 Data sources

Despite the growing importance of LNG for international energy trade and energy security, publicly available data with high spatial and temporal resolution remain limited. Official and industry sources generally report LNG trade at the country level and at monthly or annual frequencies, whereas more granular information is often available only through commercial databases. Moreover, to the best of my knowledge, no single

open-access dataset jointly represents individual LNG voyages, terminal infrastructure, reconstructed maritime routes, and the strategic chokepoints traversed by those routes.

The dataset used in this thesis was therefore constructed by integrating voyage-level LNG trade records and terminal infrastructure data with reconstructed maritime routes and additional geographic information on maritime chokepoints. The following subsections describe the four main components of this integrated dataset.

### 3.1.1 LNG trade and infrastructure data

The main data source is the Liquefied Natural Gas from Tanker, Terminal, and Trade (LNG-T3) dataset developed by Zhou et al. (2026). LNG-T3 is an open-access dataset providing global LNG infrastructure and trade information at daily resolution for the period from January 2020 to December 2024. It was constructed by combining Automatic Identification System (AIS) vessel-position and draught reports, historical port-call records, LNG tanker specifications, and terminal metadata. The complete dataset contains 17,592 individual LNG tanker voyage events and provides information on tanker movements, terminal activity, and country-to-country trade flows.

Two components of LNG-T3 were used directly in this study: the voyage-level records and the terminal inventory. The voyage data form the empirical basis for identifying directed LNG trade connections and measuring the volumes transported between terminals. The terminal inventory defines the infrastructure nodes of the network and provides the geographic and structural attributes used to characterise them. These two components were linked through the terminal identifiers included in the original dataset.

LNG-T3 was preferred to aggregate country-level trade statistics because its voyage-level resolution makes it possible to identify the specific origin and destination terminals associated with each LNG shipment. Its 2020–2024 coverage also provides a consistent five-year observation window that captures both established trade patterns and major changes in the global LNG market, including those following the disruption

of European gas supplies in 2022.

### LNG voyages

The LNG-T3 voyage data contain individual movements of LNG tankers between departure and arrival terminals. For each voyage, the available information includes the tanker identifier, the origin and destination terminals, the departure and arrival dates, and the estimated volume of LNG transported. These records were used to identify the direction, timing, and magnitude of LNG flows within the network.

Each voyage was represented as a directed movement from its departure terminal to its arrival terminal. The voyage date was then used to assign the observation to a monthly period between January 2020 and December 2024. When multiple voyages occurred between the same origin–destination pair during the same month, their transported volumes were aggregated. The resulting monthly observations define the directed and weighted trade connections between terminal nodes.

Voyage identifiers were also used to retain information on the number of shipments associated with each connection. This makes it possible to distinguish between connections characterised by a small number of high-volume voyages and those supported by more frequent tanker movements. Once the corresponding maritime routes had been reconstructed, route distance and chokepoint crossings were linked back to the individual voyage records and subsequently aggregated at the monthly level.

### LNG terminals

The LNG-T3 terminal inventory provides the identifiers, names, geographic coordinates, countries, and infrastructure characteristics of LNG facilities worldwide. Terminals constitute the origin and destination nodes of the trade network and were linked to the voyage records using their unique identifiers.

The infrastructure attributes retained for the analysis include the terminal's country, infrastructure type, processing capacity, number of infrastructure units, and start year. Infrastructure type distinguishes facilities according to their import or export

function, while capacity provides an indicator of their potential scale of operation. The number of infrastructure units supplies an additional measure of facility size and complexity. The start year was used to construct terminal age as a time-varying variable, calculated for each monthly observation as the difference between the observation year and the year in which the terminal began operating.

Terminal coordinates were used both to position terminal nodes geographically and to reconstruct the maritime route associated with each observed origin–destination pair. Before route reconstruction, terminal identifiers and coordinates were checked for consistency across the voyage and infrastructure data. This harmonisation ensured that every retained voyage could be linked to a valid departure terminal and arrival terminal.

### 3.1.2 Maritime routes and chokepoint data

While the LNG-T3 voyage records identify the origin and destination of each shipment, they do not provide the actual maritime path connecting the two terminals. For this reason, maritime routes were reconstructed from the geographic coordinates of the departure and arrival terminals using the `SeaRoute` routing software (Eurostat, 2021).

#### SeaRoute software

SeaRoute applies Dijkstra's algorithm (Dijkstra, 1959) to identify the shortest path between two locations on a predefined network representing frequently used shipping lanes, which accounts for coastlines, navigable waterways, and supported maritime passages. Specifically, the 5-km resolution of the maritime network produced through the `marnet` module was used: edges shorter than this scale are progressively contracted and geometrically similar connections are removed, reducing network complexity while preserving the principal maritime routes. Additionally, in line with the thesis' objectives, transit through both the Suez and Panama canals was enabled, allowing the routing algorithm to include these passages when they formed part of the shortest available maritime path.

A route was generated for each unique origin–destination terminal pair and linked to all voyages associated with that pair. Afterwards, the reconstructed routes were merged with the chokepoints locations to identify the strategic maritime passages traversed by each trade connection.

### Chokepoints geometries

The initial set of 28 maritime chokepoints, together with their names, identifiers, and reference coordinates, was obtained from the IMF PortWatch chokepoint database (International Monetary Fund, 2026), but because the PortWatch locations are represented primarily as point features, they could not be used directly to determine whether a reconstructed maritime route effectively crossed a passage. A geometry registry was therefore compiled to associate each chokepoint with an appropriate spatial representation. The registry, including the source and construction method for each geometry, is provided in Appendix A.

The final geometries were assembled from several sources. Published polygons for the Suez Canal, Bab el-Mandeb Strait, and Cape of Good Hope were directly obtained from the World Bank Development Data Partnership's Red Sea Monitoring project (World Bank Data Lab, 2025). Detailed IHO or SeaVoX geometries for the Malacca, Hormuz, Gibraltar, Dover, and Makassar straits were obtained through the Marine Regions Gazetteer and its geospatial services (Flanders Marine Institute, nd). For the Lombok, Sunda, Torres, and Bering straits, transit geometries were reconstructed from the WGS84 coordinates reported in official International Maritime Organization routeing documents (International Maritime Organization, 2019, 2014; Russian Federation and United States, 2017).

Where no suitable published polygon was available, operational geometries were constructed specifically using either a buffered centreline, as in the Panama Canal and Bosporus Strait, or an oriented crossing gate positioned across the relevant navigable passage. The placement of these geometries was informed by the reference coordinates provided by PortWatch (International Monetary Fund, 2026), geographic information

from Marine Regions (Flanders Marine Institute, nd), and navigational references from relevant IMO documents, the NGA GeoNames database, and NOAA/NCEI hydrographic survey records (International Maritime Organization, 1998; National Geospatial-Intelligence Agency, nd; National Centers for Environmental Information, nd).

Figure 1 shows the locations of the 28 candidate chokepoints and representative examples of the four types of geometry used to identify route crossings: a published polygon, a polygon reconstructed from IMO routeing coordinates, an operational crossing gate, and a buffered centreline.

All geometries were transformed into a common geographic coordinate system and stored in a harmonised geospatial format. To accommodate small discrepancies between the reconstructed `SeaRoute` paths and the chokepoint geometries, a uniform spatial-tolerance buffer of 25 km was applied around each geometry. A reconstructed origin–destination route was classified as traversing a chokepoint when it intersected the corresponding buffered geometry.

Of the 28 candidate chokepoints, 24 were traversed by at least one reconstructed route under the final 25-km specification and were therefore retained as nodes in the monthly network. The robustness of the route–chokepoint assignments was assessed by comparing this specification with exact geometric intersection and with alternative buffers of 5 and 10 km. The complete sensitivity analysis is reported in Appendix B.

Table 1 summarises the principal data sources, their units of observation, the main variables retained, and their role in the construction of the network.

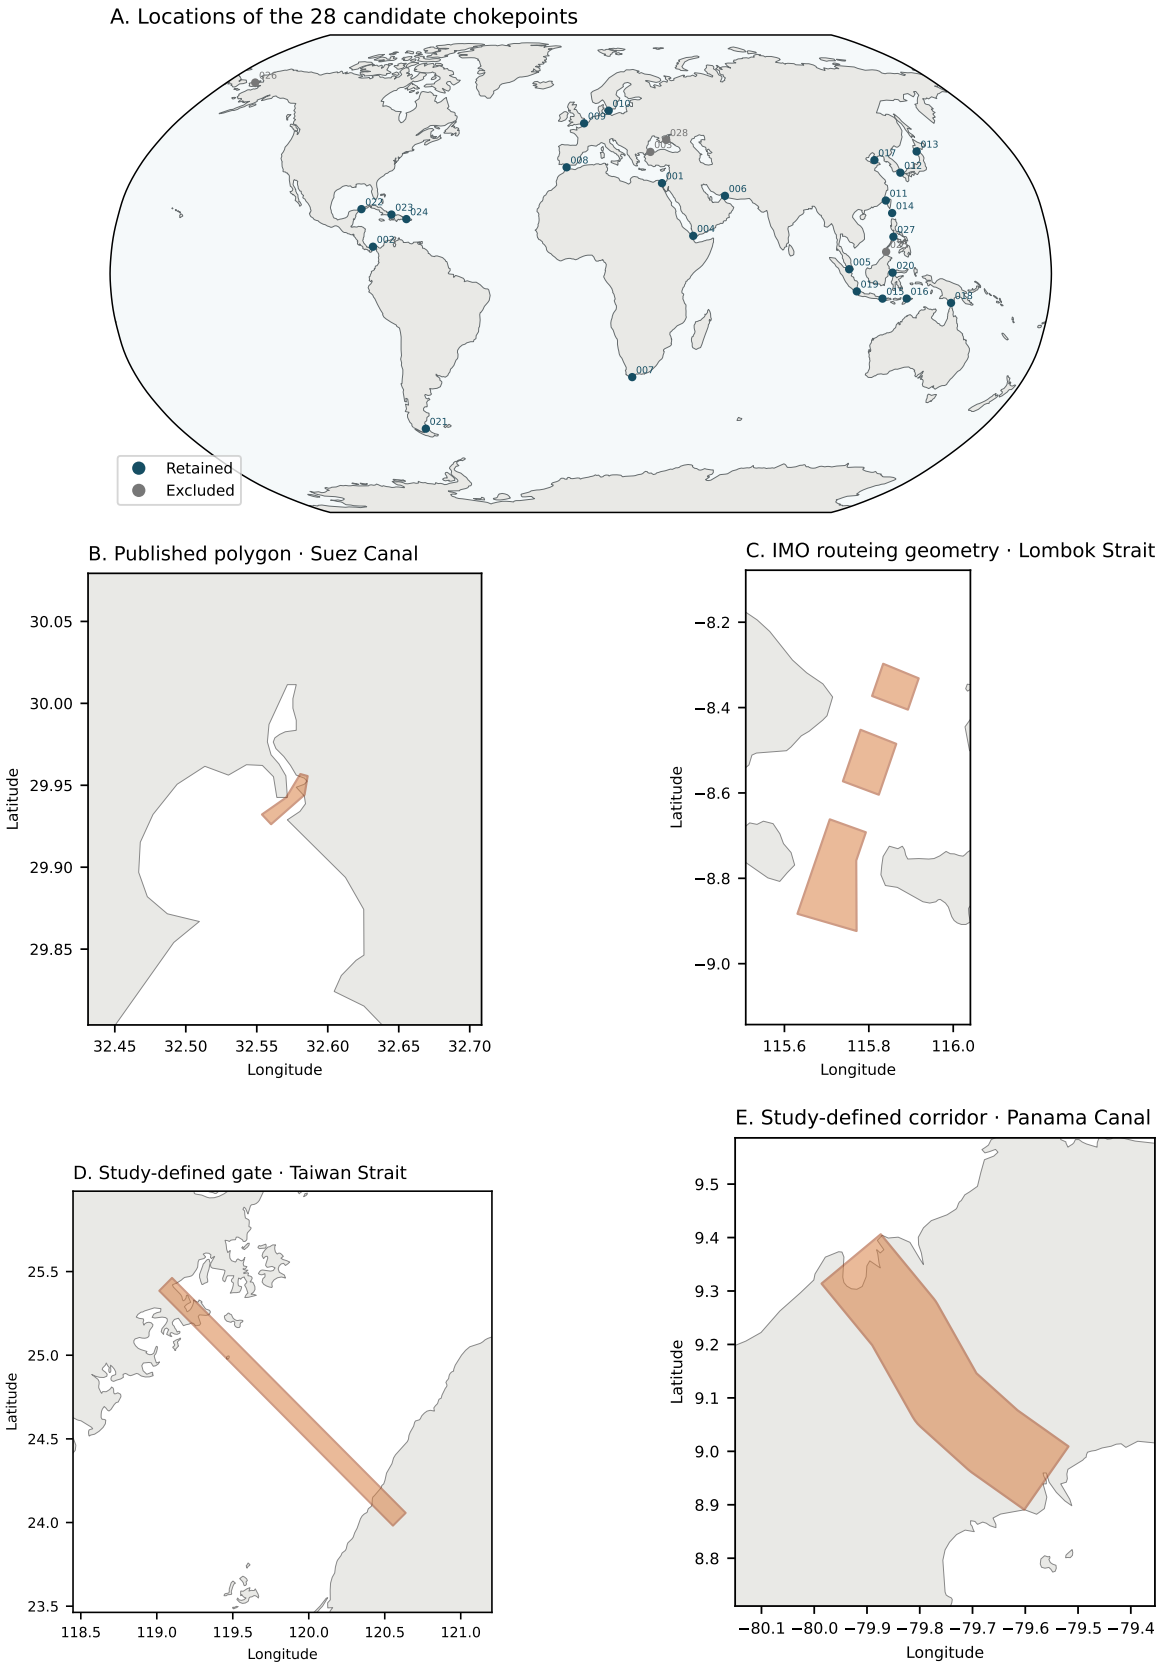


Figure 1: PortWatch reference locations of the 28 candidate chokepoints and representative route-crossing geometries. The enlarged panels show the Suez Canal (published polygon), Lombok Strait (geometry reconstructed from IMO routeing coordinates), Taiwan Strait (operational crossing gate), and Panama Canal (buffered operational centreline).

Table 1: Summary of data sources

| **Source** | **Unit of observation** | **Main variables** | **Role in the analysis** |
|---|---|---|---|
| LNG-T3 tanker voyages | Individual voyage | Departure and arrival terminals, voyage dates, tanker identifier, estimated LNG volume | Identification of directed LNG trade connections and monthly flow volumes from January 2020 to December 2024 |
| LNG-T3 terminal inventory | LNG terminal | Terminal identifier, name, coordinates, country, infrastructure type, capacity, unit count, start year | Definition and characterisation of terminal nodes |
| `searoute` | Unique origin–destination pair | Reconstructed maritime path, route distance | Reconstruction of the geographic route associated with each trade connection |
| Chokepoint geographic data | Maritime chokepoint | Name, type, and geographic location | Definition of chokepoint nodes, identification of route crossings |

## 3.2 Data preparation

Before constructing the network, the voyage and terminal datasets were harmonised to ensure that each observed shipment could be associated with a unique origin and destination node.

As an initial validation step, voyage dates, LNG volumes, terminal capacities, and unit counts were parsed into consistent formats. No invalid or missing values were found in these fields.

The LNG-T3 terminal inventory contains 545 records corresponding to 471 unique terminal names. Sixty-five names occur more than once, generally because the same facility has multiple infrastructure-status records. Whereas most repeated records have identical coordinates, three terminal names have two coordinate variants each.

Records were first distinguished by name and coordinates. One record was then

selected to represent each terminal name in the final terminal map, based on the infrastructure status reported for that record in the LNG-T3 inventory. The selection prioritised records classified as *operating*, followed by those classified as *under construction*, *idle*, *mothballed*, and *proposed*. Each of the 471 terminals in the final map was then assigned a unique node identifier.

Voyage origins and destinations were matched to the consolidated terminal map using the terminal names reported in the LNG-T3 voyage data. The corresponding node identifiers and coordinates were attached to each voyage record, and the matching status of the two endpoints was recorded separately. All origin and destination values in the 17,592 voyage records were successfully matched to the terminal map.

The original voyage table contains 8,645 laden export voyages and 8,947 return movements. Since the latter take place after delivery and therefore report zero transported LNG volume, only the laden export voyages were retained to construct the LNG trade network. The retained voyages were also required to have a valid departure date, matched origin and destination identifiers, and a strictly positive LNG volume. All export records satisfied these conditions, meaning that these checks did not produce any further exclusions.

Potential duplicate export observations were identified using the departure and arrival dates, tanker IMO number, voyage type, origin and destination terminals, and transported volume. After removing three duplicate entries, the final dataset used to construct the network contains 8,642 laden LNG voyages.

### 3.2.1 Terminal infrastructure characteristics

Terminal characteristics were obtained from the LNG-T3 infrastructure inventory and linked to the consolidated terminal identifiers. The retained attributes include country, region, geographic coordinates, infrastructure type, operational status, annual processing capacity, number of infrastructure units, and start year. No missing values were found for these attributes among the terminals retained in the final network.

Additionally, terminal age was constructed as a time-varying characteristic by subtracting the terminal's reported start year from the year of each monthly observation:

$$\mathrm{Age}_{i,t} = \mathrm{Year}_t - \mathrm{StartYear}_i \,. \tag{1}$$

### 3.2.2 Temporal aggregation

Each retained voyage was assigned to a monthly period according to its departure date. The resulting observation window extends from January 2020 to December 2024, corresponding to the complete five-year coverage of the LNG-T3 dataset and yielding 60 monthly network observations.

To preserve months in which a node had no observed activity, complete node–month panels were subsequently constructed by combining every retained node with all 60 monthly periods. Flow and voyage measures for node–month observations with no activity were assigned a value of zero to distinguish these structural zeros from missing or non-applicable node characteristics, which remained coded as unavailable.

## 3.3 Dynamic network construction

The global LNG maritime network was represented as a sequence of monthly directed and weighted graphs,

$$G_t = (V, E_t, W_t), \qquad t = 1, \ldots, 60, \tag{2}$$

where $V$ is the time-invariant set of terminal and chokepoint nodes, $E_t$ is the set of directed connections observed in month $t$, and $W_t = [w_{ij,t}]$ is the corresponding weighted adjacency matrix. An element $w_{ij,t} > 0$ represents the total LNG volume transported from node $i$ to node $j$ during month $t$, while $w_{ij,t} = 0$ indicates that no such connection was observed.

### 3.3.1 Nodes and edges

The final node set contains 183 nodes and can be written as

$$V = V^T \cup V^C, \qquad |V^T| = 159, \qquad |V^C| = 24, \tag{3}$$

where $V^T$ denotes the set of LNG terminals and $V^C$ the set of maritime chokepoints.

The 159 terminal nodes are the facilities that appear as an origin or destination of at least one retained laden voyage. Of the 28 candidate chokepoints included in the geographic registry, 24 were traversed by at least one reconstructed route and were therefore retained in the observed network.

Each commercial voyage defines an underlying directed movement from an export terminal to an import terminal. To incorporate the maritime infrastructure traversed during transportation, the reconstructed route of voyage $r$ was represented as an ordered path

$$P_r = (v_{r,0}, v_{r,1}, \ldots, v_{r,K_r}), \tag{4}$$

where $v_{r,0}$ is the departure terminal, $v_{r,K_r}$ is the arrival terminal, and any intermediate nodes are the chokepoints crossed by the route. The voyage was then expanded into the consecutive directed connections

$$E(P_r) = \{(v_{r,0}, v_{r,1}), (v_{r,1}, v_{r,2}), \ldots, (v_{r,K_r-1}, v_{r,K_r})\}. \tag{5}$$

A route that crossed no retained chokepoint generated a direct terminal-to-terminal edge. Routes crossing one or more chokepoints generated terminal-to-chokepoint, chokepoint-to-chokepoint, and chokepoint-to-terminal edges according to the order in which those nodes were encountered.

Let $\mathcal{R}_t$ denote the set of voyages during month $t$, and $q_r$ the LNG volume transported by voyage $r$. The edge weight from node $i$ to node $j$ at month $t$ is defined as

$$w_{ij,t} = \sum_{r \in \mathcal{R}_t} q_r \, \mathbb{I}\left\{(i,j) \in \mathcal{E}(P_r)\right\}, \tag{6}$$

where $\mathbb{I}\{\cdot\}$ is the indicator function. Thus, the full volume of a shipment was assigned to every segment traversed by its route. Because shipments crossing multiple segments would consequently be counted more than once in the sum of all edge weights, aggregate monthly trade volume was calculated directly from the original voyage observations.

Voyages sharing the same directed pair of nodes within a month were aggregated into a single edge. In addition to LNG volume, each monthly edge records the number of voyage traversals, the number of distinct origin–destination routes using the connection, and their route identifiers.

### 3.3.2 Node activity

Node activity was defined from the presence of incident flow in each monthly graph. For node $i$ in month $t$, the binary activity indicator was defined as

$$a_{i,t} = \mathbb{I}\left\{\sum_{j \in V} w_{ij,t} + \sum_{j \in V} w_{ji,t} > 0\right\}. \tag{7}$$

A terminal was therefore classified as active when it recorded positive incoming or outgoing LNG flow during the month. Since terminal direction was fully consistent with the infrastructure classification reported in LNG-T3, active export terminals recorded outgoing flow and active import terminals recorded incoming flow.

A chokepoint was classified as active when at least one voyage traversed it during the month, generating positive incident flow on one or more adjacent route segments. Chokepoints not traversed by any voyage in a given month were retained in the balanced node–month panel and assigned an activity value of zero.

## 3.4 Construction of node-level measures

A set of monthly node-level measures was constructed to represent different dimensions of criticality in the LNG transportation network. Since terminals and chokepoints perform different functions, their criticality was evaluated using separate but complementary measures and network representations.

On the one hand, terminals represent the origins and destinations of commercial LNG flows. Their criticality was therefore defined in terms of their importance as suppliers or recipients, the concentration of their trading relationships, and the dependence associated with those relationships. On the other hand, chokepoints represent intermediate passages along maritime routes, and their criticality was consequently defined in terms of their position within the physical transportation network, the volume of LNG passing through them, and their role in connecting otherwise separated parts of the network or in mediating important transportation paths.

Terminal criticality measures were calculated from the original terminal-to-terminal voyage flows, thereby preserving the direct commercial relationship between origins and destinations and avoiding the repeated counting of shipments across multiple route segments. Chokepoint criticality measures were instead calculated on the complete segment-level network, including both terminals and chokepoints, so that the position of each passage within the full sequence of maritime movements could be represented. Additional structural indicators were calculated for both node types.

### 3.4.1 Terminal criticality measures

Terminal criticality was represented through measures of directional network importance, counterparty concentration, trade dependence, and voyage distance. These measures were constructed monthly and, where relevant, adapted to the terminal's observed role as an LNG exporter or importer.

### Terminal role

Let $q_{ij,t}$ denote the total LNG volume transported from terminal $i$ to terminal $j$ during month $t$. Monthly outgoing flow, incoming flow, and throughput were defined as

$$\begin{aligned} O_{i,t} &= \sum_{j} q_{ij,t}, \\ I_{i,t} &= \sum_{j} q_{ji,t}, \\ T_{i,t} &= O_{i,t} + I_{i,t}. \end{aligned} \tag{8}$$

A terminal was classified as active in month $t$ when $T_{i,t} > 0$. Among active terminals, the observed monthly role was classified as exporter when $O_{i,t} > 0$ and $I_{i,t} = 0$, importer when $I_{i,t} > 0$ and $O_{i,t} = 0$, and bidirectional when both flows were positive.

For active terminal–months, export share was defined as

$$s_{i,t}^{\text{out}} = \frac{O_{i,t}}{T_{i,t}}, \tag{9}$$

so that exporters have $s_{i,t}^{\text{out}} = 1$, importers have $s_{i,t}^{\text{out}} = 0$, and bidirectional terminals take values between zero and one.

### Counterparty concentration

The concentration of a terminal's trade across its counterparties was measured using the Herfindahl–Hirschman Index (HHI), a standard measure of concentration based on the squared shares of individual counterparties (Hirschman, 1945).

Let $\mathcal{D}_{i,t} = \{j : q_{ij,t} > 0\}$ be the set of destination terminals receiving LNG from terminal $i$ in month $t$, and let $\mathcal{S}_{i,t} = \{j : q_{ji,t} > 0\}$ be the set of origin terminals supplying it. The outgoing and incoming terminal-level concentration indices were calculated, respectively, as

$$\begin{aligned} H_{i,t}^{\text{out}} &= \sum_{j \in \mathcal{D}_{i,t}} \left( \frac{q_{ij,t}}{O_{i,t}} \right)^2, \\ H_{i,t}^{\text{in}} &= \sum_{j \in \mathcal{S}_{i,t}} \left( \frac{q_{ji,t}}{I_{i,t}} \right)^2. \end{aligned} \tag{10}$$

The same procedure was applied after aggregating counterparties by country, producing corresponding country-level concentration indices. Values approaching one indicate that flows are concentrated in a small number of counterparties, whereas lower values indicate greater diversification.

A role-specific concentration measure was then assigned according to the terminal's observed direction of trade:

$$H_{i,t}^{\text{role}} = \begin{cases} H_{i,t}^{\text{out}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} = 0, \\ H_{i,t}^{\text{in}}, & \text{if } I_{i,t} > 0 \text{ and } O_{i,t} = 0, \\ s_{i,t}^{\text{out}} H_{i,t}^{\text{out}} + \left(1 - s_{i,t}^{\text{out}}\right) H_{i,t}^{\text{in}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} > 0. \end{cases} \tag{11}$$

**Directional PageRank**

Terminal network importance was measured using PageRank, which considers both the magnitude of a terminal's connections and the importance of the terminals to which it is connected (Page et al., 1999). The measure was calculated separately for importing and exporting roles on the monthly directed and flow-weighted terminal network: import PageRank was calculated using the observed direction of LNG flows, whereas export PageRank was calculated after reversing all edges. Intuitively, import PageRank assigns greater importance to terminals receiving flows from other important terminals, while export PageRank captures the corresponding importance of LNG suppliers.

For the observed network, weighted import PageRank satisfies

$$PR_{i,t}^{\text{imp}} = \frac{1-\alpha}{N_t} + \alpha \sum_{\substack{j \\ (j,i) \in E_t}} PR_{j,t}^{\text{imp}} \frac{q_{ji,t}}{\sum_k q_{jk,t}}, \tag{12}$$

where $N_t$ is the number of active terminals in month $t$, and the damping factor was set to $\alpha = 0.85$, following the conventional value used by Brin and Page (1998). In this formulation, $\alpha$ controls the contribution propagated through the network's directed flows, while $1 - \alpha$ determines the uniform redistribution component. Export PageRank, $PR_{i,t}^{\text{exp}}$, was obtained by applying the same calculation to the reversed

monthly network.

The role-specific PageRank measure was defined as

$$PR_{i,t}^{\text{role}} = \begin{cases} PR_{i,t}^{\text{exp}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} = 0, \\ PR_{i,t}^{\text{imp}}, & \text{if } I_{i,t} > 0 \text{ and } O_{i,t} = 0, \\ s_{i,t}^{\text{out}} PR_{i,t}^{\text{exp}} + \left(1 - s_{i,t}^{\text{out}}\right) PR_{i,t}^{\text{imp}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} > 0. \end{cases} \tag{13}$$

**Trade dependence**

For each directed terminal pair, the dependence of an importing terminal $j$ on an exporter $i$ was measured as the share of $j$'s total imports supplied by $i$:

$$d_{ij,t} = \frac{q_{ij,t}}{I_{j,t}}. \tag{14}$$

To summarise the dependence generated by exporter $i$, this bilateral measure was weighted by the share of the exporter's flow directed towards each destination:

$$D_{i,t}^{\text{exp}} = \sum_{j} \left( \frac{q_{ij,t}}{O_{i,t}} \right) d_{ij,t}. \tag{15}$$

The resulting measure is high when an exporter directs a substantial share of its LNG towards terminals that depend strongly on its supply.

For an importing terminal $i$ located in country $c(i)$, dependence was measured as its share of the total LNG volume received by all terminals in that country:

$$D_{i,t}^{\text{imp}} = \frac{I_{i,t}}{\sum_{k:\, c(k)=c(i)} I_{k,t}}. \tag{16}$$

The role-specific dependence measure was subsequently defined as

$$D_{i,t}^{\text{role}} = \begin{cases} D_{i,t}^{\text{exp}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} = 0, \\ D_{i,t}^{\text{imp}}, & \text{if } I_{i,t} > 0 \text{ and } O_{i,t} = 0, \\ s_{i,t}^{\text{out}} D_{i,t}^{\text{exp}} + \left(1 - s_{i,t}^{\text{out}}\right) D_{i,t}^{\text{imp}}, & \text{if } O_{i,t} > 0 \text{ and } I_{i,t} > 0. \end{cases} \tag{17}$$

**Mean voyage distance**

Mean voyage distance was calculated as the unweighted arithmetic mean of the reconstructed distances of voyages associated with each terminal. For an exporting terminal, this corresponds to

$$\overline{L}_{i,t}^{\text{out}} = \frac{1}{n_{i,t}^{\text{out}}} \sum_{r \in \mathcal{R}_{i,t}^{\text{out}}} L_r, \tag{18}$$

where $\mathcal{R}_{i,t}^{\text{out}}$ is the set of voyages departing from terminal $i$ in month $t$, $n_{i,t}^{\text{out}}$ is the cardinality of this set, and $L_r$ is the reconstructed distance of voyage $r$.

For an importing terminal, the corresponding measure was defined as

$$\overline{L}_{i,t}^{\text{in}} = \frac{1}{n_{i,t}^{\text{in}}} \sum_{r \in \mathcal{R}_{i,t}^{\text{in}}} L_r, \tag{19}$$

where $\mathcal{R}_{i,t}^{\text{in}}$ is the set of voyages arriving at terminal $i$ in month $t$ with cardinality $n_{i,t}^{in}$. The role-relevant mean voyage distance was subsequently lagged by one month before being included among the model covariates.

### 3.4.2 Chokepoint criticality measures

Chokepoint criticality was represented through weighted betweenness, PageRank, and the share of monthly network flow. Together, these measures capture complementary dimensions of a passage's importance, including its position along high-flow paths, its centrality in the direction of LNG movement, and the volume of LNG transported through it.

**Weighted betweenness centrality**

Betweenness centrality measures the extent to which a node lies on shortest paths between other nodes (Brandes, 2001). Since edge weights in the LNG network represent transported volumes rather than geographic or economic distances, they could not be used directly as path lengths. A distance measure was therefore assigned to

each directed edge as the inverse of its positive LNG flow:

$$\ell_{ij,t} = \frac{1}{w_{ij,t}}, \qquad w_{ij,t} > 0. \tag{20}$$

where $w_{ij,t}$ is the LNG volume transported from node $i$ to node $j$ during month $t$. Under this transformation, edges carrying larger LNG volumes are treated as stronger and therefore shorter connections.

Normalised weighted betweenness for node $i$ was then calculated as

$$B_{i,t} = \frac{1}{(N_t - 1)(N_t - 2)} \sum_{\substack{j \neq i \neq k \\ j \neq k}} \frac{\sigma_{jk,t}(i)}{\sigma_{jk,t}}, \tag{21}$$

where $N_t = |V_t|$ is the number of active nodes in month $t$ and $\sigma_{jk,t}$ in the denominator is the number of shortest directed paths from node $j$ to node $k$, calculated using the edge distances defined in Equation 20. The term $\sigma_{jk,t}(i)$ denotes the number of these paths that pass through node $i$. A high value of $B_{i,t}$ indicates that a chokepoint lies on a large share of the shortest paths defined by the distribution of LNG flows and therefore occupies an important intermediary position in the monthly transportation network.

**PageRank**

PageRank provides a complementary measure of chokepoint importance by accounting for both the magnitude and direction of LNG flows and the importance of the nodes from which those flows originate. For node $i$, it is defined as

$$PR_{i,t} = \frac{1 - \alpha}{N_t} + \alpha \sum_{\substack{j \\ (j,i) \in E_t}} PR_{j,t} \frac{w_{ji,t}}{\sum_k w_{jk,t}}, \tag{22}$$

where $\alpha = 0.85$ is the damping factor.

**Share of monthly network flow**

For a terminal, monthly node throughput equals the sum of its incoming and outgoing flows. For a chokepoint, the same shipment appears on both an incoming and an outgoing segment as it passes through the node. Let $V^{\mathrm{CP}} \subseteq V$ denote the set of chokepoint nodes. For each $i \in V^{\mathrm{CP}}$, throughput was defined as half of its total incident flow:

$$F_{i,t} = \frac{1}{2}\left(\sum_{j} w_{ji,t} + \sum_{k} w_{ik,t}\right), \qquad i \in V^{\mathrm{CP}}. \tag{23}$$

The share of monthly network flow associated with node $i$ was then calculated as

$$S_{i,t} = \frac{F_{i,t}}{\sum_{n \in V} F_{n,t}}, \qquad i \in V^{\mathrm{CP}}. \tag{24}$$

This measure represents the share of total node throughput accounted for by a chokepoint in a given month.

### 3.4.3 Common structural indicators

In addition to the node-type-specific criticality measures, a common set of structural indicators was calculated for both terminals and chokepoints. These measures describe whether a node or one of its incident connections contributes to maintaining the connectivity of the monthly transportation network.

The indicators were calculated separately for each month using the undirected projection $U_t$ of the active directed network $G_t$. Edge direction was disregarded because articulation points and bridges concern the preservation of connectivity rather than the direction of LNG movement. Self-loops were excluded because they do not contribute to connectivity.

### Articulation points

A node was classified as an articulation point when its removal increased the number of connected components in the monthly undirected network. The corresponding binary indicator was defined as

$$A_{i,t} = \mathbb{I}\left\{\kappa\left(U_t^{(-i)}\right) > \kappa\left(U_t\right)\right\}, \tag{25}$$

where $\kappa(U_t)$ denotes the number of connected components in $U_t$, and $U_t^{(-i)}$ is the graph obtained by removing node $i$ and its incident edges.

A separate indicator identifies nodes directly connected to an articulation point:

$$CA_{i,t} = \mathbb{I}\left\{\exists\, j \in \mathcal{N}_{i,t} \text{ such that } A_{j,t} = 1\right\}, \tag{26}$$

where $\mathcal{N}_{i,t}$ is the set of immediate neighbours of node $i$ in $U_t$. This distinction separates nodes whose own removal could disrupt network connectivity from nodes directly exposed to a structurally critical neighbour.

### Global and local bridges

An edge was classified as a global bridge when its removal increased the number of connected components in the undirected network. Denoting the set of global bridges in month $t$ by $\mathcal{B}_t^G$, the number of global bridges incident to node $i$ was calculated as

$$GBC_{i,t} = \sum_{e \in \delta_t(i)} \mathbb{I}\left\{e \in \mathcal{B}_t^G\right\}, \tag{27}$$

where $\delta_t(i)$ is the set of edges incident to node $i$ in month $t$. The corresponding binary indicator was defined as

$$GB_{i,t} = \mathbb{I}\left\{GBC_{i,t} > 0\right\}. \tag{28}$$

Local bridges were defined as edges whose endpoints had no common neighbour. Because every global bridge also satisfies this condition, global bridges were removed

from the local-bridge set so that the two measures represented distinct structural mechanisms. Denoting the resulting set of local-only bridges by $\mathcal{B}_t^L$, the corresponding node-level count was calculated as

$$LBC_{i,t} = \sum_{e \in \delta_t(i)} \mathbb{I}\left\{e \in \mathcal{B}_t^L\right\}. \tag{29}$$

To account for differences in node degree, the shares of incident edges classified as global and local-only bridges were also calculated:

$$\begin{aligned} GBS_{i,t} &= \frac{GBC_{i,t}}{d_{i,t}}, \\ LBS_{i,t} &= \frac{LBC_{i,t}}{d_{i,t}}, \end{aligned} \qquad d_{i,t} > 0, \tag{30}$$

where $d_{i,t}$ is the degree of node $i$ in the monthly undirected network. Together, these measures distinguish connections whose removal would disconnect part of the network from connections that locally bridge otherwise weakly connected neighbourhoods.

## 3.5 Construction of the model-ready panels

Three model-ready panels were constructed from the monthly network data described above: a node activity panel, a terminal criticality panel, and a chokepoint criticality panel. Each panel has a balanced structure in which every unit is represented in every month from January 2020 to December 2024, including months with no observed activity. This preserves transitions between active and inactive states and provides a consistent temporal basis for the subsequent models.

For each node, one-month lags of activity, throughput, and voyage count were calculated from the corresponding values in the preceding month. Variables with strongly right-skewed distributions were also included in logarithmic form using the transformation $\log(1 + x)$, which retains zero-valued observations. Depending on the panel, these variables comprise lagged throughput, lagged voyage count, terminal processing capacity, and lagged mean voyage distance.

Given the temporal coverage of the data, lagged variables are unavailable for January 2020. The binary indicator `lag_available` identifies observations for which the required preceding-month information can be calculated.

Lagged neighbourhood activity was constructed using an undirected historical neighbourhood: for each month $t$, the neighbours of a node are those connected to it by at least one directed edge observed up to and including month $t-1$. The resulting variables record the number of historical neighbours, the number that were active in $t-1$, and the corresponding active share. Historical neighbourhoods were used because defining a node's neighbourhood exclusively from edges observed in $t-1$ would make every identified neighbour active by construction, causing the active-neighbour share to be mechanically equal to one. The cumulative definition instead retains previously observed neighbours regardless of whether they were active in $t-1$, thereby capturing variation in the recent activity of a node's established connections. Connections first observed after $t-1$ are excluded to prevent the use of future information: neighbourhood-activity measures remain unavailable until a node has acquired at least one historical neighbour.

Finally, the common set of model covariates included seasonal terms, represented through sine and cosine transformations of the calendar month. This cyclical representation allows December and January to be treated as adjacent rather than as the endpoints of a linear sequence.

A complete description of the variables included in each model-ready panel, together with their transformations and availability, is provided in Appendix C.

### 3.5.1 Node activity panel

The node activity panel contains all 183 network nodes, comprising 159 LNG terminals and 24 maritime chokepoints, observed over 60 months, resulting in $183 \times 60 = 10{,}980$ node–month observations.

The response variable is the binary indicator of current node activity. The model

covariates comprise preceding-month activity, throughput, voyage count, historical-neighbour activity, and the seasonal terms defined above. Time-invariant or slowly varying node characteristics were obtained from the consolidated node inventory and include node type and, where applicable, country, infrastructure type, start year, and annual processing capacity. Months without observed participation were retained with `active` equal to zero and the corresponding flow and voyage measures set to zero.

### 3.5.2 Terminal criticality panel

The terminal criticality panel is restricted to the 159 LNG terminals, producing $159 \times 60 = 9{,}540$ terminal–month observations.

Its outcomes comprise the terminal criticality measures defined in Section 3.4.1, namely role-specific PageRank, role-specific counterparty concentration at the terminal and country levels, and role-specific dependence. They also include the common structural indicators defined in Section 3.4.3, which identify whether a terminal is an articulation point, is incident to a global bridge, or is directly connected to an articulation point.

Criticality measures based on realised commercial activity are defined only for active terminal–months and remain unavailable for inactive observations. Structural indicators, by contrast, are retained for every terminal–month and are equal to zero when the terminal does not belong to the active monthly network.

The terminal panel additionally includes the preceding-month terminal role and role-relevant mean voyage distance, together with country, infrastructure type, annual processing capacity, number of infrastructure units, start year, and terminal age. Continuous covariates are retained in both their original and, where appropriate, log-transformed forms.

### 3.5.3 Chokepoint criticality panel

The chokepoint criticality panel contains the 24 chokepoints included in the final network over the same 60-month period, yielding $24 \times 60 = 1{,}440$ chokepoint–month

observations.

The outcomes comprise weighted betweenness centrality, PageRank, and the share of monthly network flow defined in Section 3.4.2, together with the common structural indicators introduced in Section 3.4.3. Additional measures of degree, route exposure, and voyage traversals were retained as supplementary network characteristics.

Finally, the panel includes the common lagged and seasonal covariates described above, together with lagged mean voyage distance for voyages traversing each chokepoint.

## 3.6 Data and methodological limitations

The construction of the LNG maritime network is subject to limitations arising both from the underlying LNG-T3 data and from the procedures used to reconstruct routes and derive network measures.

As discussed by Zhou et al. (2026), LNG-T3 relies extensively on Automatic Identification System messages, which are self-reported by vessels and may contain errors, delays, or incomplete information. AIS coverage also varies geographically according to the availability and density of receiver stations. Coverage is generally more extensive in Europe and North America than in regions such as Southeast Asia, where archipelagic geography and a lower density of receivers may generate spatial blind spots. These differences can introduce geographic variation in data quality.

Incomplete AIS trajectories and missing port-call records may result in partially reconstructed or unobserved voyages, while inaccurate draught reporting may affect the classification of whether a tanker is loaded. To mitigate these sources of uncertainty, LNG-T3 adopts a conservative validation procedure and retains only voyages considered suitable for estimating trade flows. Although this improves the reliability of the individual records, it may result in a systematic underestimation of aggregate LNG trade relative to industry and government statistics (Zhou et al., 2026).

Additional uncertainty concerns the estimation of cargo volumes. LNG-T3 assumes that tankers depart fully loaded, which provides a consistent basis for global

aggregation but does not capture possible partial loadings associated with operational constraints, contractual arrangements, or market conditions. Estimated volumes may therefore overstate the cargo transported on some individual voyages. At the aggregate level, however, this potential upward bias coexists with the potential downward bias arising from incomplete voyage coverage, and their combined effect cannot be determined unambiguously.

A further limitation arises from the reconstruction of maritime routes, as the available voyage records identify departure and arrival terminals but do not contain the complete trajectories followed by individual tankers. The routes used in this study, generated using `SeaRoute`, are modelled approximations rather than documented voyage trajectories and may not reproduce routing decisions influenced by weather, congestion, regulatory restrictions, security conditions, canal availability, or commercial considerations.

Small spatial discrepancies between the reconstructed paths and the operational chokepoint geometries were addressed through a uniform 25-km tolerance. However, the sensitivity analysis reported in Appendix B shows that the assignments for Korea Strait and Mindoro Strait are particularly dependent on the selected tolerance. Chokepoint exposure should therefore be interpreted as an approximation derived from reconstructed routes rather than direct evidence that individual vessels crossed each passage.

As a final clarification of scope, the resulting network represents physical LNG flows observed during 2020–2024 and the transportation paths reconstructed for those flows. Accordingly, the resulting measures characterise realised network activity and estimated route exposure within the study period.

# Chapter 4

# Exploratory network analysis

This chapter examines the structure and evolution of the reconstructed LNG maritime network from January 2020 to December 2024, by describing changes in monthly trade flows and connectivity, patterns of node activity, and the network positions of terminals and chokepoints using the measures introduced in Chapter 3. The analysis provides a descriptive overview of the main temporal and cross-sectional patterns in the data and examines the relationships among the candidate variables, to identify relevant patterns, potential redundancy, and shared variation that may inform the subsequent modelling analysis.

To address these objectives, the chapter is organised as follows. Section 4.1 examines the temporal evolution of the monthly LNG network; Section 4.2 then describes node activity and temporal sparsity over the observation period; Section 4.3 focuses on terminals, considering their observed trade roles and the measures of centrality, concentration, and dependence associated with their network positions; Section 4.4 examines chokepoints through their flow exposure, PageRank, and weighted betweenness; Section 4.5 compares the structural positions of terminals and chokepoints using articulation-point and bridge-based measures; finally, Section 4.6 examines associations among the candidate variables and discusses their implications for the subsequent modelling analysis.

As described in Section 3.2.2, the node–month and terminal–month datasets retain

both active and inactive observations. In this chapter, summary statistics for network-position measures are generally calculated over active observations, while analyses of node activity and temporal sparsity retain inactive months. The relevant sample is specified in the text or table notes whenever necessary.

## 4.1 Network evolution

The observed LNG maritime network changes in size over the study period. The numbers of active nodes and directed edges generally increase from 2021 to late 2023, reaching their respective maxima in December 2023, before declining during the second half of 2024. The ranges and averages of these network characteristics, together with monthly trade activity and directed density, are summarised in Table 2.

Despite this evolution in network size, directed density remains within a relatively narrow range, ranging from 0.0122 to 0.0180. The monthly LNG network is therefore consistently sparse: only a small fraction of all possible directed connections among active nodes is observed in any given month.

Directed density is calculated among active nodes, so changes in its denominator must be considered when interpreting the results: a month with fewer edges can still have higher density if fewer nodes are active. Network expansion or contraction should therefore not be interpreted as a corresponding change in the degree of connectivity among active nodes.

Table 2: Selected monthly network and node-activity summaries, 2020–2024.

| Measure | Minimum | Mean | Maximum |
|---|---|---|---|
| Active nodes | 72 | 96.5 | 126 |
| Active directed edges | 88 | 136.5 | 192 |
| Export voyages | 70 | 144.0 | 237 |
| Exported volume (MCM) | 11.48 | 24.01 | 38.77 |
| Directed density among active nodes | 0.0122 | 0.0148 | 0.0180 |

*Note:* Exported volume is expressed in million cubic metres (MCM).

While Table 2 summarises the monthly networks quantitatively, Figure 2 illustrates the geographic structure of a representative month. June 2021 was selected as an

illustrative snapshot because its 98 active nodes and 138 directed edges are close to the corresponding monthly averages reported in Table 2.

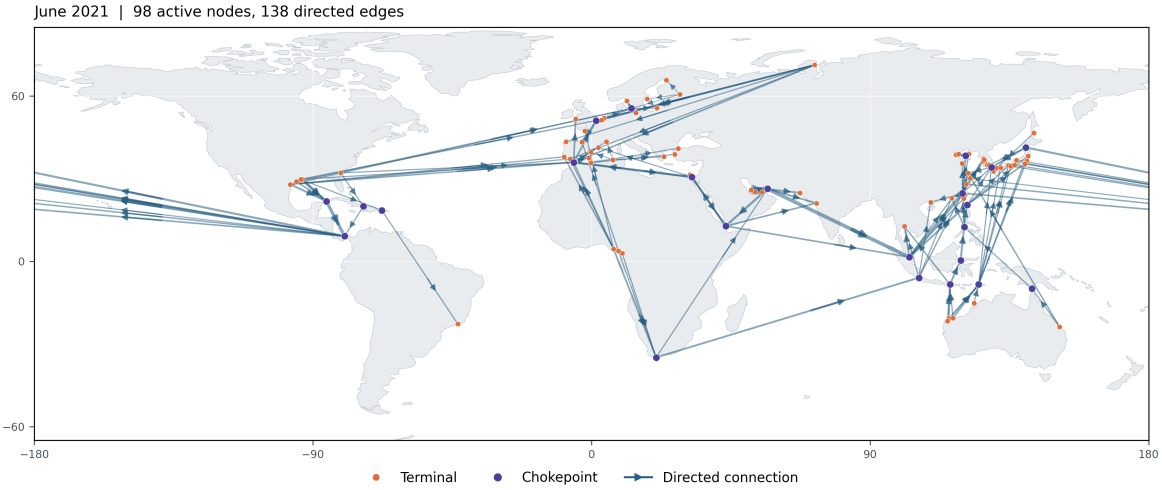


Figure 2: Geographic snapshot of the observed LNG network in June 2021.

*Note:* Points show active terminals and chokepoints; arrows indicate the direction of observed network connections. Line width represents monthly LNG volume on each directed edge; connections are schematic rather than sailed routes.

To examine how the network's size and trade volume evolve over time, Figure 3 compares the monthly evolution of active nodes, directed edges, and observed LNG export volume, with each series indexed to its mean over the study period.

The three measures show broadly similar changes over time, but export volume exhibits substantially greater month-to-month variation, showing that changes in network size are not necessarily proportional to changes in the trade volume carried by the network.

## 4.2 Node activity and temporal sparsity

Using the definition of node activity introduced in Section 3.3.2, of 10,980 potential node-month observations, 5,792 (52.75%) are active and 5,188 (47.25%) inactive.

As shown in Figure 3, the number of active nodes generally increases through 2023 and declines towards the end of 2024. Correspondingly, the monthly share of inactive nodes ranges from 31.15% to 60.66% (Figure 4).

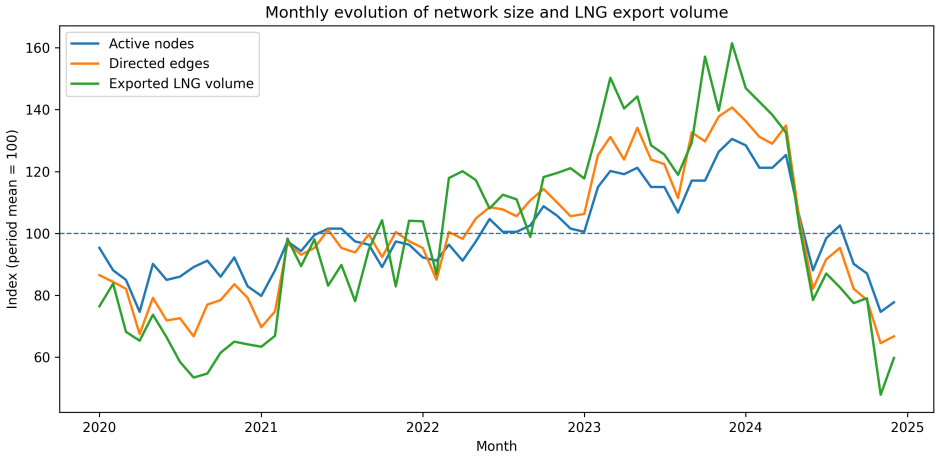


Figure 3: Monthly evolution of network size and observed LNG export volume, 2020–2024.

*Note:* Each series is indexed to its monthly mean over the 2020–2024 period, which is set equal to 100. Export volume is calculated from the observed export voyages.

Terminals account for 9,540 node–month observations, of which 4,552 are active and 4,988 inactive (52.29%). The 24 chokepoints account for 1,440 observations, of which 1,240 are active and 200 inactive (13.89%). This difference is consistent with the nodes' distinct roles in the network: a terminal participates as an origin or destination of a voyage, whereas a chokepoint can be traversed by voyages linking many different terminal pairs. Aggregate inactivity is therefore primarily attributable to terminals, although chokepoint activity is not constant. These different base rates suggest that activity may need to be examined separately by node type.

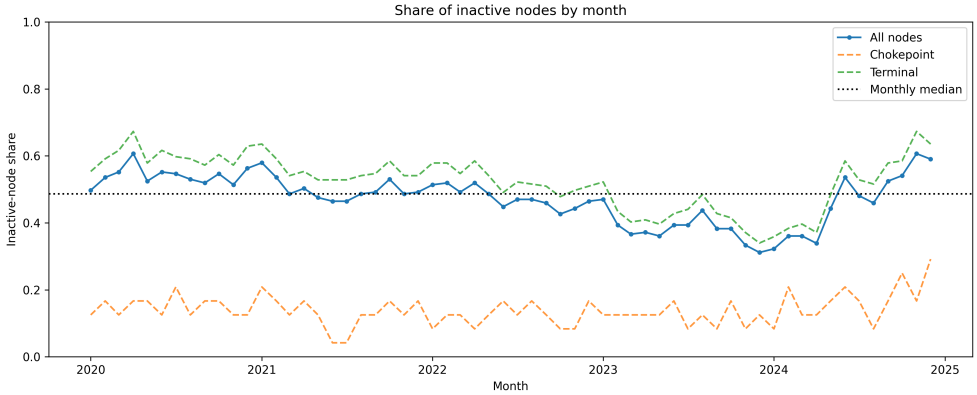


Figure 4: Monthly inactive-node shares for all nodes and by node type.

Inactivity is substantively relevant to the interpretation of centrality: an inactive node may receive a zero in the balanced node-month dataset even though the criticality measure is chiefly meaningful when it participates in trade. For this reason, the subsequent analysis of node criticality focuses on active node-month observations, avoiding the conflation of inactivity with low criticality.

## 4.3 Terminal network position

This section examines how terminals participate in observed LNG trade and how their positions differ across the monthly networks. It first describes terminal roles and trade activity, then considers centrality, counterparty concentration, and dependence.

### 4.3.1 Terminal roles and trade activity

Terminal participation varies considerably across the 60 monthly networks: of the 4,552 active terminal–month observations, 3,234 are classified as importers and 1,318 as exporters.

Country-level roles were assessed over the full 2020–2024 period using each country's net trade position. Qatar, the United States, and Russia recorded the largest cumulative export volumes, while China, France, and Japan recorded the largest cumulative import volumes. A net importer or exporter role does not imply that a country trades exclusively in one direction. For instance, Malaysia was a net importer despite recording exports, and the United States was a net exporter despite recording imports.

Table 3 compares throughput, voyage counts, and the numbers of terminal counterparties for active terminal–month observations, distinguished by importer and exporter role.

Exporter observations are characterised by higher levels of trade activity across all three measures. Median monthly throughput is 0.505 million cubic metres for exporters, compared with 0.328 million cubic metres for importers, while the corresponding median numbers of voyages are four and two. Exporters also interact with

Table 3: Trade activity of active terminal–month observations by terminal role, 2020–2024.

| | Importer ($n = 3{,}234$) | | Exporter ($n = 1{,}318$) | |
|---|---|---|---|---|
| Measure | Median | 95th percentile | Median | 95th percentile |
| Throughput (million cubic metres) | 0.328 | 1.226 | 0.505 | 3.792 |
| Voyages | 2 | 7 | 4 | 22 |
| Terminal counterparties | 1 | 4 | 3 | 14 |

The analysis is restricted to active terminal–month observations. Throughput values are rounded to three decimal places.

a larger number of terminal counterparties, with a median of three compared with one for importers. These differences are even more pronounced at the 95th percentile, particularly for voyage counts and numbers of counterparties.

More generally, throughput is strongly right-skewed across active terminal–month observations. Its overall median is 346,000 cubic metres, and the 95th percentile is approximately 1.90 million cubic metres, while Rasgas LNG Terminal 3 reaches the observed maximum of 10.91 million cubic metres in October 2023.

### 4.3.2 Centrality, concentration and dependence

The terminal measures discussed below were defined in Section 3.4.1. Here, their distributions are examined across active terminal–month observations to explore different aspects of terminals' positions and trade relationships in the observed LNG network. These pooled distributions are complemented by terminal-level summaries of the monthly measures over the entire period, which distinguish the positions of individual terminals and help assess whether high scores are sustained over time or occur only occasionally.

First, role-specific PageRank has a median of 0.0142 and a 95th percentile of 0.0363. The 95th percentile is approximately 2.6 times the median, indicating substantial variation in the scores assigned to active terminals. The highly right-skewed distribution suggests that a relatively small number of terminal–month observations occupy particularly prominent positions within the monthly trade network, while most receive

lower scores.

These scores should nevertheless be interpreted as relative measures within each monthly network. Because PageRank is normalised separately each month, its values are influenced by both the distribution of trade relationships and the number of active terminals. Comparisons across months therefore describe changes in relative network prominence rather than changes in an absolute measure of importance.

To examine terminal positions over the full period, two summaries are considered: mean PageRank conditional on activity and mean PageRank across all 60 months, assigning zero to inactive months. The first describes a terminal's average prominence when participating in the network; the second combines that prominence with its frequency of participation.

Table 4 reports the three highest full-period mean scores within each terminal role. Rasgas LNG Terminal 3 has the highest mean PageRank among exporters, at 0.0912, followed by Sabine Pass and Yamal, at 0.0449 and 0.0418, respectively. All three terminals are active in every month, so their mean scores reflect sustained network participation over the full observation period.

Among importers, Gate LNG Terminal has the highest full-period mean, at 0.0195, followed by Yung-An and Fos Tonkin. Fos Tonkin has a slightly higher mean during active months than Yung-An, but its lower number of active months reverses their ordering when inactivity is included. The distinction is more pronounced for terminals observed only occasionally: Sepetiba Bay FSRU has an active-month mean of 0.0191, close to Gate's, but is active in only one month. Consequently, its mean PageRank across the full panel is approximately 0.00032, highlighting how a high conditional mean alone should therefore not be interpreted as evidence of sustained prominence.

PageRank is relevant to the assessment of terminal prominence, but does not establish how easily a terminal could be replaced. A well-positioned terminal may trade with partners that have alternative sources or destinations, whereas a less prominent terminal may serve counterparties that rely heavily on its supply or handle a substantial share of its country's LNG receipts. Concentration and dependence are therefore

Table 4: Terminals with the highest mean role-specific PageRank across all 60 months, ranked separately by observed role.

| Terminal | Country | Active months | Mean PageRank | |
|---|---|---|---|---|
| | | | Active months | All months |
| *Exporters* | | | | |
| Rasgas LNG Terminal 3 | Qatar | 60 | 0.0912 | 0.0912 |
| Sabine Pass LNG Terminal | United States | 60 | 0.0449 | 0.0449 |
| Yamal LNG Terminal | Russia | 60 | 0.0418 | 0.0418 |
| *Importers* | | | | |
| Gate LNG Terminal | Netherlands | 60 | 0.0195 | 0.0195 |
| Yung-An LNG Terminal | Taiwan | 57 | 0.0182 | 0.0172 |
| Fos Tonkin LNG Terminal | France | 55 | 0.0187 | 0.0171 |

*Note:* Arithmetic means of monthly PageRank scores. Active-month means exclude inactivity; all-month means assign zero to inactive months.

examined alongside PageRank to assess the trade relationships underlying a terminal's network position.

The counterparty concentration measures show substantial variation among active terminal–month observations. The median HHI is 0.556 when counterparties are individual terminals and 0.674 when they are aggregated by country. These median values correspond to approximately 1.8 and 1.5 equally weighted effective counterparties at the terminal and country levels, respectively. Thus, even when a terminal trades with several partners, its observed monthly flow may be concentrated among relatively few of them.

An HHI of one occurs in 43.5% of active terminal–month observations at the terminal level, indicating that the role-relevant flow involves a single terminal counterparty. At the country level, the corresponding proportion is 47.4%, indicating concentration in a single country, potentially across multiple terminals.

Terminal-level averages reveal different patterns behind these pooled results. As shown in Table 5, Rasgas and Sabine Pass have relatively low mean terminal-level HHIs, at 0.094 and 0.125, respectively, despite their prominent PageRank positions.

Their observed monthly exports are therefore distributed more broadly across counterparties than the pooled distribution might suggest. In contrast, Cameroon FLNG has a mean terminal-level HHI of 0.953 across 32 active months, indicating highly concentrated shipments during its observed activity.

Country-level concentration also distinguishes diversification across terminals from diversification across countries. For instance, the mean HHI of Gate increases from 0.362 at the terminal level to 0.531 at the country level, showing that some diversification across supplying terminals occurs within the same countries.

These findings suggest that an interruption involving a major partner could affect a substantial share of some terminals' existing trade. The measures nevertheless describe observed monthly relationships and do not establish whether alternative suppliers or destinations would be available. Moreover, the terminal-level averages summarise monthly concentration: they do not imply that a terminal trades with the same counterparties throughout the period.

Table 5: Mean counterparty concentration and role-specific dependence during active months for selected terminals, 2020–2024.

| Terminal | Active months | Mean HHI | | Mean dependence |
|---|---|---|---|---|
| | | Terminal | Country | |
| *Exporters* | | | | |
| Rasgas LNG Terminal 3 | 60 | 0.094 | 0.139 | 0.730 |
| Sabine Pass LNG Terminal | 60 | 0.125 | 0.179 | 0.508 |
| Cameroon FLNG Terminal | 32 | 0.953 | 0.969 | 0.350 |
| *Importers* | | | | |
| Gate LNG Terminal | 60 | 0.362 | 0.531 | 0.910 |
| Al Zour LNG Import Terminal | 40 | 0.652 | 0.657 | 1.000 |
| Zeebrugge LNG Terminal | 59 | 0.558 | 0.599 | 1.000 |

*Note:* Terminals are selected to illustrate contrasting relationships, rather than to provide a ranking. All values are unweighted arithmetic means across active months.

Finally, role-specific dependence has a median of 0.406 across active terminal–month observations, but this pooled value combines different interpretations for the two terminal roles. For exporters, which have a median of 0.495, higher values indicate

that a larger share of their flow reaches importing terminals that rely heavily on its supply. An exporter can therefore have high dependence even when its shipments are distributed across several destinations, provided that it supplies a substantial share of those destinations' imports. Rasgas illustrates this combination: its low mean terminal-level HHI of 0.094 coexists with mean dependence of 0.730. Its exports are relatively diversified, yet its receiving terminals tend to rely substantially on its supply when weighted by their shares of its shipments. Cameroon FLNG illustrates the opposite pattern: its highly concentrated exports coexist with lower mean dependence of 0.350. Concentration in an exporter's own destinations therefore does not necessarily imply equally strong reliance by those destinations on its supply.

Among active importer months, the median dependence is 0.333. Here, higher values indicate that the terminal accounts for a larger share of its country's observed LNG receipts. A high value therefore identifies a terminal through which a substantial proportion of national LNG imports passes, making its continued operation potentially relevant to the country's ability to receive LNG.

The terminal-level summaries illustrate the extent of this concentration at individual terminals. Gate accounts for an average of 91.0% of the Netherlands' observed monthly LNG receipts across its 60 active months, while Al Zour and Zeebrugge have dependence equal to one in all their active months, numbering 40 and 59, respectively. In those months, all observed LNG receipts in their respective countries pass through these terminals.

The crucial distinction from the counterparty HHI measure described above lies in whose reliance is being described: HHI quantifies the concentration of a terminal's own trade across its partners, whereas role-specific dependence describes its counterparties' reliance on its supply or its country's reliance on that terminal for observed LNG receipts. An importer may receive all its LNG from one exporter, giving it an HHI of one, while handling only a small share of its country's total imports and therefore having low role-specific dependence. Conversely, a terminal may receive LNG from several suppliers while accounting for a large share of national LNG receipts. Gate

illustrates the latter pattern, combining a mean terminal-level HHI of 0.362 with mean dependence of 0.910.

Concentration and dependence are therefore retained alongside PageRank to capture distinct dimensions of terminal criticality: partner concentration, reliance on individual terminals, and prominence within the trade network. Together, these measures characterise terminal criticality without directly quantifying the consequences of a disruption.

## 4.4 Chokepoint network position

Unlike terminals, which serve as the origins or destinations of LNG voyages, chokepoints act as intermediate nodes along maritime routes. Their position can therefore be examined in terms of both exposure to LNG flows and location within the wider network, captured by PageRank and betweenness.

Table 6 provides summary statistics for the main flow-exposure and centrality measures considered in this section.

Table 6: Summary statistics for flow-exposure and centrality measures across active chokepoint–month observations, 2020–2024.

| Measure | Mean | Median | 95th percentile | Maximum |
|---|---|---|---|---|
| Throughput (MCM) | 2.007 | 1.342 | 5.857 | 10.702 |
| Voyages | 11.08 | 8 | 31 | 55 |
| Route exposure | 8.30 | 7 | 21 | 31 |
| Share of monthly network flow | 0.0225 | 0.0148 | 0.0639 | 0.1132 |
| PageRank | 0.0172 | 0.0163 | 0.0299 | 0.0572 |
| Betweenness | 0.0126 | 0.0072 | 0.0408 | 0.0946 |

*Note:* Statistics are calculated across the 1,240 active chokepoint–month observations. Throughput is reported in million cubic metres.

### 4.4.1 Flow exposure

Flow exposure varies substantially across the 24 chokepoints and over months. As shown in Table 6, the distribution of monthly throughput is strongly right-skewed,

with the observed maximum of 10.70 million cubic metres recorded at the Strait of Hormuz in April 2022.

The same heterogeneity appears when flow is expressed relative to the total flow observed in the monthly network. Among active observations, the share of monthly network flow passing through a chokepoint has a median of approximately 1.48%, while the 95th percentile reaches 6.39%. The maximum is recorded at the Strait of Hormuz in June 2020, when approximately 11.32% of the month's observed LNG trade passed through the chokepoint.

The flow-share measure complements the absolute volume of LNG passing through a chokepoint. Because monthly LNG trade varies over the observation period, a given throughput may represent different levels of exposure depending on the total volume traded in that month. Expressing chokepoint throughput as a share of total monthly network flow therefore provides a relative measure of how much of the observed network flow is routed through each passage.

Beyond flow volume, voyage and route counts provide additional information on the frequency and variety of chokepoint use. Active chokepoints are traversed by a median of eight voyages per month and are exposed to a median of seven distinct routes, while the corresponding 95th percentiles are 31 voyages and 21 routes.

### 4.4.2 Centrality measures

Flow exposure alone does not describe the structural location of a chokepoint within the reconstructed network. Two passages carrying similar LNG volumes may connect different parts of the network and, consequently, differ in their centrality. PageRank and betweenness are therefore considered alongside flow exposure to capture these complementary aspects of chokepoint prominence.

As defined in Section 3.4.2, PageRank accounts for both the magnitude and direction of LNG flows and the importance of the nodes from which those flows originate.

It therefore complements flow exposure by capturing a chokepoint's relative position within each monthly network rather than simply the amount of LNG passing

through it. The distribution of raw PageRank values indicated relatively prominent positions for some chokepoints, with a median of 0.0163 among active observations and values reaching 0.0572. This motivated a closer examination of their magnitude relative to the size of each monthly network. Observed PageRank was therefore compared with a uniform benchmark of $1/N_t$, corresponding to an equal distribution of PageRank across the $N_t$ active nodes.

Among active observations, the median PageRank was 1.54 times this monthly benchmark, and 85.6% of observations exceeded it. Active chokepoints therefore tended to receive a larger share of PageRank than would result from an equal distribution across active nodes.

While PageRank captures relative prominence within the flow network, betweenness focuses on a different aspect of centrality by indicating the extent to which a chokepoint lies on shortest paths connecting other nodes. A chokepoint may therefore receive a relatively high PageRank without occupying a particularly strong intermediary position, while another may have a lower PageRank but lie on a comparatively large number of shortest paths.

As shown in Table 6, its distribution is strongly right-skewed, with high levels of shortest-path intermediation concentrated in a comparatively small subset of active chokepoint–month observations.

Notably, positive activity does not necessarily imply positive betweenness: betweenness is equal to zero in 8 of the 1,240 active chokepoint–month observations. A chokepoint may therefore be traversed by observed LNG routes without lying on any of the shortest paths between other node pairs captured by this measure.

The distinction between the three measures is also visible when their average values are compared across individual chokepoints. Table 7 reports four passages selected to illustrate contrasting combinations of flow exposure, PageRank, and betweenness. All four are active throughout the 60-month observation period, so differences in their averages are not driven by different frequencies of activity.

The Strait of Hormuz has the largest mean flow share among the selected passages,

Table 7: Selected chokepoints illustrating different dimensions of network position, 2020–2024.

| Chokepoint | Active months | Mean flow share | Mean PageRank | Mean betweenness |
|---|---|---|---|---|
| Strait of Hormuz | 60 | 0.0766 | 0.0182 | 0.0181 |
| Gibraltar Strait | 60 | 0.0438 | 0.0263 | 0.0360 |
| Taiwan Strait | 60 | 0.0364 | 0.0309 | 0.0287 |
| Suez Canal | 60 | 0.0327 | 0.0211 | 0.0301 |

*Note:* Chokepoints are selected to illustrate contrasting relationships among the three measures rather than to provide a ranking. Means are calculated over active months.

at 7.66%, but substantially lower mean PageRank and betweenness than some passages carrying smaller shares of monthly network flow. The Taiwan Strait, by contrast, has a mean flow share of 3.64% but the highest mean PageRank of the four, at 0.0309. Gibraltar Strait combines a lower mean flow share than Hormuz, at 4.38%, with the highest mean betweenness, at 0.0360, while the Suez Canal also exhibits relatively high betweenness despite accounting for a mean 3.27% of monthly network flow.

These comparisons show that greater flow exposure does not necessarily correspond to higher PageRank or betweenness, highlighting the distinct dimensions of chokepoint criticality captured by these measures.

## 4.5 Structural position of nodes

The structural indicators defined in Section 3.4.3 complement the node-type-specific measures by describing connectivity in the monthly undirected projection of the reconstructed network. They distinguish nodes whose removal would disconnect parts of the network from nodes that are incident to structurally important edges or adjacent to articulation points. Rather than reflecting the volume of LNG transported through individual connections, these indicators depend only on their presence in the monthly network.

The distributions differ substantially between terminals and chokepoints. Articulation status occurs in 393 of the 4,552 active terminal–month observations (8.6%),

compared with 902 of the 1,240 active chokepoint–month observations (72.7%). Incidence to at least one global bridge is common in both groups, occurring in 64.7% of active terminal months and 72.5% of active chokepoint months. Local-only bridge incidence is more frequent among chokepoints, at 82.8%, than among terminals, at 26.1%.

These differences are consistent with the roles of terminals and chokepoints in the network: terminals are voyage origins or destinations, whereas chokepoints are intermediate nodes connecting successive route segments. Chokepoints consequently have more opportunities to connect branches of the observed network, although their classifications depend on the routes used in each month.

The analysis of articulation points further illustrates this distinction. Among terminals, Vysotsk repeatedly acts as an articulation point, being classified as an articulation point in 49 of its 59 active months. Among chokepoints, Gibraltar Strait, Taiwan Strait and the Strait of Hormuz are articulation points in all 60 months. Removing the node therefore disconnects the monthly undirected network in every observed month.

Table 8: Frequency of structural classifications for selected terminals and chokepoints, 2020–2024.

| Node | Activemonths | Articulationpoint | Globalbridge | Local-onlybridge |
|---|---|---|---|---|
| *Terminals* | | | | |
| Vysotsk LNG Terminal | 59 | 49 | 58 | 0 |
| Dunkirk LNG Terminal | 56 | 0 | 56 | 0 |
| Nigeria LNG Terminal | 59 | 21 | 21 | 59 |
| Sabine Pass LNG Terminal | 60 | 24 | 25 | 58 |
| *Chokepoints* | | | | |
| Gibraltar Strait | 60 | 60 | 60 | 58 |
| Strait of Hormuz | 60 | 60 | 58 | 36 |
| Malacca Strait | 60 | 54 | 54 | 60 |
| Suez Canal | 60 | 46 | 46 | 59 |

*Note:* Entries report the number of active months in which each classification applies. Global and local-only bridge columns indicate incidence to at least one edge of the corresponding type. Classifications can coexist at a node, although global bridges are excluded from the local-only edge set. Examples illustrate contrasting patterns rather than a ranking.

Since a global bridge is an edge whose removal separates its endpoints into different

connected components, incidence to such an edge can indicate a connection between groups of nodes, but it can also describe the attachment of a peripheral node to the rest of the network.

Dunkirk LNG Terminal provides a clear example of the latter case. In all its 56 active months, it has one neighbour in the undirected transport network and its sole incident edge is a global bridge. It is nevertheless never an articulation point: removing Dunkirk does not split the remaining network, whereas removing its incident edge isolates Dunkirk. Its classification therefore describes peripheral attachment rather than a role in connecting other nodes.

Conversely, a node can be an articulation point without being incident to a global bridge. The Strait of Hormuz is an articulation point in all 60 months but is incident to a global bridge in only 58. In the remaining two months, removing the node separates the network even though removing any individual incident edge does not. This distinction illustrates why node-removal and edge-removal indicators provide different information.

Local-only bridges identify another structural feature. Their endpoints have no common neighbour, but removing the edge does not disconnect the component because a longer alternative path remains. They therefore indicate the absence of an immediate two-edge alternative through a shared neighbour, rather than an edge that is indispensable to overall connectivity.

Nigeria LNG Terminal is incident to at least one local-only bridge in all its 59 active months, and Sabine Pass in 58 of 60. Among chokepoints, Malacca Strait has local-only bridge incidence in every month, while Suez Canal has it in 59 of 60 months (Table 8).

These classifications can coexist with articulation status or global bridge incidence because a node may have several incident edges with different structural properties. For instance, Malacca Strait is an articulation point and is incident to a global bridge in 54 months, while also being incident to a local-only bridge in all 60 months. This combination indicates that some connections have longer alternative paths, whereas

other connections, or the node as a whole, maintain connectivity between otherwise separated parts of the network. It is to be noted that the alternative paths identified in the undirected projection are not necessarily feasible substitutes for the original LNG movements: these indicators do not account for direction, navigability or transport capacity.

These results distinguish the frequent intermediate connectivity roles of chokepoints from the more varied structural positions of terminals.

## 4.6 Associations and modelling implications

Spearman rank correlations provide a preliminary assessment of the overlap among variables considered in the subsequent modelling analysis.

Among the terminal covariates, lagged log-transformed throughput is strongly associated with lagged log-transformed voyage count ($\rho_S = 0.989$), whereas its associations with other terminal characteristics are substantially weaker. Its correlation with lagged log-transformed mean voyage distance is 0.223 when the latter is defined, while the corresponding correlations with terminal capacity and terminal age are 0.423 and 0.199, respectively. Neighbour activity is also only weakly associated with these node-specific characteristics. These patterns suggest that, beyond the strong association between throughput and voyage count, the candidate covariates capture aspects of terminal activity that cannot be explained solely by operational scale.

A similar pattern is observed among the chokepoint covariates. Lagged log-transformed throughput is strongly associated with lagged log-transformed voyage count ($\rho_S = 0.992$), whereas its associations with the lagged share of active neighbours ($\rho_S = 0.118$) and lagged log-transformed mean voyage distance ($\rho_S = -0.057$) are substantially weaker. The seasonal terms also show little association with lagged throughput. Beyond the close correspondence between throughput and voyage count, the chokepoint covariates therefore capture distinct aspects of activity, route characteristics, and temporal variation.

The associations among the criticality measures differ between terminals and chokepoints. Among active terminal–month observations, terminal- and country-level counterparty HHIs are strongly correlated ($\rho_S = 0.920$), reflecting their related but distinct measures of trade concentration. Their associations with role-specific PageRank are negative and more moderate in magnitude ($-0.596$ and $-0.545$, respectively), while role-specific dependence is more weakly associated with the other terminal measures.

For active chokepoint–month observations, the three continuous measures show stronger positive associations. Flow share correlates with weighted betweenness at 0.810 and with PageRank at 0.704, while the correlation between PageRank and betweenness is 0.706. Thus, although the individual comparisons in Section 4.4 show that greater flow exposure does not necessarily correspond to higher centrality, the aggregate associations indicate that chokepoints carrying larger shares of observed LNG flows tend to have higher PageRank and betweenness values. The correlations remain below one, consistent with the measures capturing related but distinct dimensions of chokepoint criticality.

Figure 5 summarises the pairwise associations among the terminal and chokepoint criticality measures. Taken together, these patterns provide descriptive evidence of shared variation across multiple dimensions of node criticality while preserving meaningful differences between the individual measures. These findings provide the empirical motivation for investigating whether the measures' joint variation can be represented by a lower-dimensional structure in the modelling framework developed in Chapter **??**.




(a) Terminal criticality measures

(b) Chokepoint criticality measures

Figure 5: Spearman rank correlations among the criticality measures for active node–month observations. Panel (a) reports correlations among terminal measures, while panel (b) reports correlations among chokepoint measures.

# Chapter 5
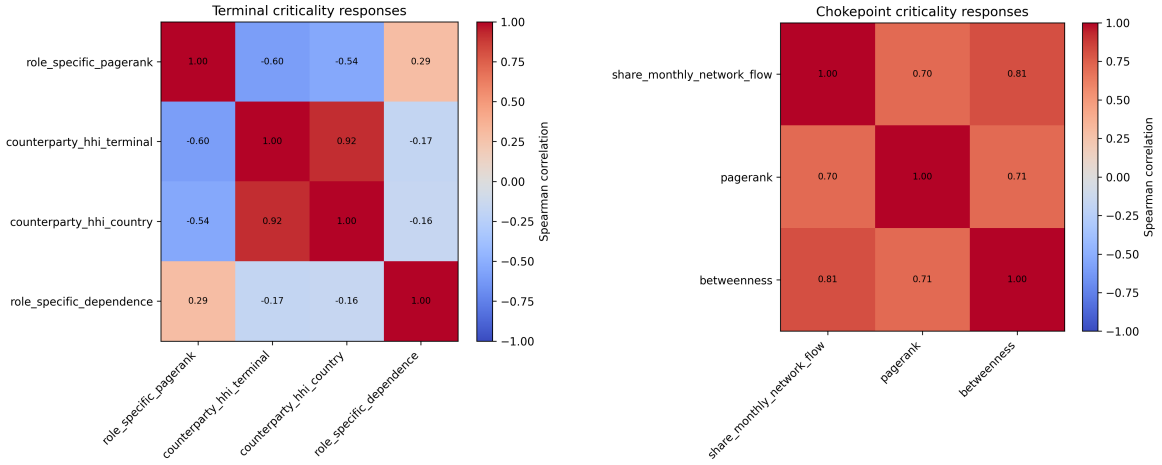
# Bayesian Reduced-Rank Model for Network Measures

## 5.1 Modelling objective and scope

The objective of this chapter is to investigate whether several measures of node network position can be represented through a common latent dimension, and to examine how this dimension relates to node characteristics and lagged network conditions. Separate models for terminals and chokepoints provide initial Bayesian rank-one specifications against which the need for additional structure can be assessed.

The specification is static and conditional on consecutive observed activity. It includes no model for the probability of activity, nor an autoregressive evolution of the factor. Although observations are indexed by node and month, the model does not explicitly accounts for repeated observations of a node or dependence among nodes within a monthly network. Coefficients therefore describe associations under this working specification, rather than causal effects. Terminals and chokepoints are estimated separately because their functions and response measures differ. Their factors have separate parameters and are not directly comparable as a common criticality scale.

## 5.2 Estimation samples

### 5.2.1 Terminals

The terminal model-ready panel contains 9,540 observations for 159 terminals from January 2020 to December 2024. An observation is retained when the terminal is active in month $t$, a lag from the preceding calendar month is available, and the terminal is also active in that month. Calendar lags are checked against the complete panel before filtering. This prevents the preceding selected active observation from being mistaken for the preceding calendar month.

Excluding 4,988 currently inactive observations, 71 active observations without an available calendar lag, and 916 observations preceded by inactivity leaves 3,565 observations active in consecutive months. A further 112 observations with missing terminal age are excluded, producing an estimation sample of 3,453 observations for 137 terminals. Consequently, the findings concern this selected sample, rather than all active terminal-months or the complete balanced panel.

There are 2,325 observations with importer status in the preceding month and 1,128 with exporter status.

### 5.2.2 Chokepoints

The chokepoint panel contains 1,440 observations for 24 nodes. Applying the same calendar-lag and consecutive-activity criteria excludes 200 currently inactive observations, 21 active observations without an available calendar lag, and 56 observations preceded by inactivity. The resulting sample has 1,163 observations for all 24 chokepoints. As for terminals, these results describe consecutive-active node-months rather than the entire balanced panel.

## 5.3 Responses and covariates

The terminal model includes six responses. The three bounded responses are role-specific PageRank, terminal counterparty HHI, and role-specific dependence. The

three binary responses indicate whether a terminal is an articulation point, has an incident global bridge, or is connected to an articulation point. These measures capture different aspects of network position, therefore they need not all increase with the same latent dimension.

The covariate vector contains seven predictors: lagged historical-neighbour activity share, the transformed role-relevant mean voyage distance and terminal capacity, sine and cosine terms for monthly seasonality, terminal age, and an indicator for exporter status in the preceding month. Numeric covariates are centred and divided by their estimation-sample standard deviations. The exporter indicator remains on its zero–one scale. Thus a coefficient for a numeric predictor represents a one-standard-deviation difference on the transformed scale where applicable, whereas the role coefficient compares exporter with importer status, holding the other covariates fixed.

The bounded responses are modelled on their original scales. In the estimation sample, PageRank lies strictly between zero and one, while HHI and dependence lie in $(0, 1]$. Neither has observed zeros. HHI equals one in 34.09% of observations and dependence equals one in 20.76%. These support restrictions and boundary masses motivate a Beta likelihood for PageRank and a one-inflated Beta likelihood for HHI and dependence, which combines an interior Beta distribution with a point mass at one.

The chokepoint model has five responses: PageRank, betweenness, share of monthly network flow, articulation-point status, and connection to an articulation point. The incident-global-bridge indicator is excluded because it differs from articulation-point status in only three of the 1,163 selected observations, and their binary correlation is 0.993.

The four chokepoint predictors are lagged historical-neighbour activity share, the transformed mean voyage distance, and the monthly sine and cosine terms. All four are standardised within the chokepoint estimation sample. PageRank and flow share are strictly inside $(0, 1)$, while betweenness has six zeros (0.516%) and otherwise lies inside $(0, 1)$. None of the three responses equals one. PageRank and flow share therefore use

Beta likelihoods, while betweenness uses a zero-inflated Beta likelihood to retain its exact zeros.

## 5.4 Static rank-one factor specification

For each node type separately, let $\boldsymbol{x}_{i,t}$ be the standardised covariate vector, with the role indicator retained on its original scale, and let $f_{i,t}$ be a scalar latent factor. The factor regression is

$$f_{i,t} \mid \boldsymbol{x}_{i,t}, \boldsymbol{\beta} \sim \mathcal{N}(\boldsymbol{x}_{i,t}^{\mathsf{T}}\boldsymbol{\beta}, 1). \tag{31}$$

The residual factor variance is fixed at one to define its scale. The PageRank loading is constrained to be positive to orient the factor, while the other loadings are unrestricted. Conditional on the factors and parameters, the responses are assumed independent, and factors for different node-months are independent given their covariates and regression coefficients.

For bounded response $j$, the interior mean and precision are defined as

$$\operatorname{logit}(\mu_{i,t,j}) = \alpha_j + \lambda_j f_{i,t}, \tag{32}$$

$$A_{i,t,j} = \mu_{i,t,j}\phi_j, \qquad D_{i,t,j} = (1 - \mu_{i,t,j})\phi_j. \tag{33}$$

For terminals, $j = 1$ denotes PageRank, $j = 2$ HHI, and $j = 3$ dependence. PageRank follows

$$Y_{i,t,1} \mid f_{i,t} \sim \operatorname{Beta}(A_{i,t,1}, D_{i,t,1}). \tag{34}$$

For HHI and dependence, the boundary probability has a separate loading:

$$\operatorname{logit}(\pi_{i,t,j}) = c_j + d_j f_{i,t}, \qquad j = 2, 3, \tag{35}$$

$$Y_{i,t,j} \mid f_{i,t} \sim \pi_{i,t,j}\delta_1 + (1 - \pi_{i,t,j}) \operatorname{Beta}(A_{i,t,j}, D_{i,t,j}), \tag{36}$$

where $\delta_1$ denotes a point mass at one. Interior observations contribute the Beta density multiplied by $1 - \pi_{i,t,j}$, while exact ones contribute the probability $\pi_{i,t,j}$. Observed values are not clipped or displaced from the boundary. The overall conditional mean

is

$$\mathbb{E}(Y_{i,t,j} \mid f_{i,t}) = \pi_{i,t,j} + (1 - \pi_{i,t,j})\mu_{i,t,j}. \tag{37}$$

Thus the sign of $\lambda_j$ alone does not determine how the overall mean changes with the factor.

For chokepoints, PageRank and flow share follow the interior Beta specification. For betweenness, let $\rho_{i,t,2}$ denote the probability of zero:

$$\operatorname{logit}(\rho_{i,t,2}) = c_2^{(0)} + d_2^{(0)} f_{i,t}, \tag{38}$$

$$Y_{i,t,2} \mid f_{i,t} \sim \rho_{i,t,2}\delta_0 + (1 - \rho_{i,t,2}) \operatorname{Beta}(A_{i,t,2}, D_{i,t,2}). \tag{39}$$

Here $\delta_0$ is a point mass at zero. The overall conditional mean is $(1 - \rho_{i,t,2})\mu_{i,t,2}$. The zero-probability loading is estimated separately from the interior-mean loading.

For binary response $k$,

$$B_{i,t,k} \mid f_{i,t} \sim \text{Bernoulli}(p_{i,t,k}), \tag{40}$$

$$\operatorname{logit}(p_{i,t,k}) = a_k + \ell_k f_{i,t}. \tag{41}$$

Writing $f_{i,t} = \boldsymbol{x}_{i,t}^{\mathsf{T}}\boldsymbol{\beta} + z_{i,t}$ shows that the covariate contributions to the conditional link predictors have coefficient matrices $\boldsymbol{\lambda}\boldsymbol{\beta}^{\mathsf{T}}$, $\boldsymbol{\ell}\boldsymbol{\beta}^{\mathsf{T}}$, and $\boldsymbol{d}\boldsymbol{\beta}^{\mathsf{T}}$, each of rank at most one. All responses therefore share one direction of covariate association. This reduced-rank property concerns the conditional link scale. After integrating over the factor, response means generally do not equal an inverse link evaluated at the mean factor.

### 5.4.1 Prior distributions

The prior distributions were chosen to provide regularisation while allowing sufficient flexibility in the relationships between the latent factor and the observed responses.

For terminals, the independent prior distributions are

$$\begin{aligned}
\beta_r &\sim \mathcal{N}(0, 0.5^2), & \lambda_1 &\sim \text{HalfNormal}(1),\\
\lambda_j &\sim \mathcal{N}(0, 1),\ j = 2, 3, & \ell_k &\sim \mathcal{N}(0, 1),\\
\alpha_j &\sim \mathcal{N}(m_j, 1.5^2), & (m_1, m_2, m_3) &= (-4, 0, 0),\\
a_k &\sim \mathcal{N}(0, 2^2), & \log \phi_j &\sim \mathcal{N}(\log 10, 0.7^2),\\
c_j &\sim \mathcal{N}(0, 1.5^2), & d_j &\sim \mathcal{N}(0, 1),\ j = 2, 3.
\end{aligned}$$

Regression coefficients were assigned zero-centred Normal priors with standard deviation 0.5, favouring moderate covariate associations on the scale of the latent factor. The first continuous-response loading was constrained to be positive through a Half-Normal prior, fixing the orientation of the latent factor. The remaining loadings were assigned zero-centred Normal priors, allowing both positive and negative associations with the factor.

For the interior components of the bounded responses, intercept priors were specified on the logit scale. Their centres were selected to reflect the approximate order of magnitude of the corresponding network measures. In particular, the PageRank intercept was centred at $-4$, corresponding to an inverse-logit value of approximately 0.018, while the remaining terminal intercepts were centred at zero.

Binary-response intercepts were assigned $\mathcal{N}(0, 2^2)$ priors, allowing a relatively broad range of baseline probabilities. The intercepts governing boundary inflation were assigned $\mathcal{N}(0, 1.5^2)$ priors, while their factor loadings followed $\mathcal{N}(0, 1)$ distributions.

The precision parameters of the bounded continuous components were assigned log-Normal priors, with $\log \phi_j \sim \mathcal{N}(\log 10, 0.7^2)$. This specification ensures positive precision values, with prior median 10 and an approximate central 95% interval of $[2.54, 39.44]$, allowing different degrees of dispersion around the conditional means.

For chokepoints, the same prior families were adopted, with parameters estimated independently from the terminal model. The interior intercept centres were set to $(-4, -5, -4)$ for PageRank, betweenness, and flow share, respectively, reflecting the

relatively small values typically observed for these measures. In particular, the inverse-logit of $-5$ is approximately 0.0067, comparable to the empirical median of chokepoint betweenness.

The betweenness zero-component intercept was assigned a $\mathcal{N}(-5, 1.5^2)$ prior, expressing a prior preference for a low probability of exact zeros at factor value zero. Its factor loading followed a $\mathcal{N}(0, 1)$ prior. Given the small number of observed zeros, inference on this component may be particularly sensitive to the prior specification.

These distributions were adopted as initial regularising priors rather than independently elicited prior information. Their prior predictive implications and the sensitivity of the posterior findings to alternative specifications are examined in Section 5.7.

### 5.4.2 Posterior sampling and diagnostics

The models were implemented in Python 3.12.15 using PyMC 5.20.1, with PyTensor 2.27.1 as the computational backend. Posterior inference was performed using the No-U-Turn Sampler (NUTS), an adaptive variant of Hamiltonian Monte Carlo.

Posterior summaries and convergence diagnostics were computed using ArviZ 0.21.0. Data processing and visualisation relied on NumPy 1.26.4, pandas 2.3.3, and Matplotlib 3.9.2.

Each model uses NUTS with four chains, 1,500 warm-up iterations and 2,000 retained draws per chain, giving 8,000 retained draws in total. The target acceptance probability was set to 0.95 and the random seed was 20261008. Chains were sampled sequentially.

Initial values orient the factor towards PageRank and include independent perturbations between chains. These values affect computation rather than the likelihood or priors.

Diagnostics cover regression coefficients, response parameters, factors, factor means and factor residuals.

The baseline terminal run has no post-warm-up divergences, a maximum reported rank-normalised $\widehat{R}$ of 1.01, minimum bulk effective sample size of 817, and minimum

tail effective sample size of 1,958.

The diagnostic summaries report rounded values. The run passes the implemented screening criteria: no divergences, maximum reported $\widehat{R} \leq 1.01$, and minimum bulk and tail ESS of at least 400.

Trace plots for the global parameters are provided in Appendix D.1 (Figure 8).

The baseline chokepoint run also has no post-warm-up divergences and maximum reported $\widehat{R} = 1.01$. Its minimum bulk ESS is 472 and minimum tail ESS is 905, both for the betweenness precision parameter (Appendix D.1, Figure 10). Therefore, both runs pass the same basic screening.

Together, the numerical diagnostics reported here provide encouraging evidence of satisfactory MCMC mixing, although they do not guarantee complete exploration of the posterior.

Within-chain autocorrelation functions for selected global parameters are also provided in Appendix D.1 (Figures 13 and 14 for terminals; Figures 15 and 16 for chokepoints). The selection includes parameters with the lowest effective sample sizes and the PageRank anchor loading, with duplicate selections removed. These plots complement the trace plots and numerical diagnostics by showing autocorrelation within each chain. The plots show positive autocorrelation at short lags, with a decay that varies across parameters and chains. Autocorrelation is more persistent for the betweenness loading and precision in the chokepoint model, whereas the voyage-distance coefficient and PageRank loading decay more rapidly. These patterns are consistent with differences in sampling efficiency across parameters and should be interpreted alongside the reported ESS and $\widehat{R}$ diagnostics.

## 5.5 Terminal posterior analysis

### 5.5.1 Covariate associations

Table 9 reports posterior means and 95% highest-density intervals (HDIs) for the factor-regression coefficients. Exporter status in the preceding month and terminal

capacity have the clearest positive associations with the factor. Neighbour activity and lagged voyage distance also have positive intervals excluding zero. The intervals for terminal age and both seasonal terms include zero, failing to provide clear evidence of a seasonal association in this specification.

Table 9: Factor-regression coefficients for the terminal model. Numeric predictors are standardised; exporter status is a zero–one indicator.

| Predictor | Posterior mean | 95% HDI |
|---|---|---|
| Lagged neighbour activity share | 0.096 | $[0.057, 0.137]$ |
| $\log(1 + \text{lagged voyage distance})$ | 0.062 | $[0.020, 0.105]$ |
| Month sine | $-0.032$ | $[-0.070, 0.004]$ |
| Month cosine | $-0.004$ | $[-0.042, 0.032]$ |
| $\log(1 + \text{capacity})$ | 0.409 | $[0.363, 0.453]$ |
| Terminal age | $-0.019$ | $[-0.057, 0.021]$ |
| Lagged exporter indicator | 1.392 | $[1.296, 1.488]$ |

These coefficients concern the latent factor, not changes in the original response units. Their interpretation depends on the estimated response loadings and links. Moreover, the lack of explicit terminal or monthly dependence may affect posterior uncertainty, so the intervals should be understood as conditional on the working model.

### 5.5.2 Response relationships and factor interpretation

Table 10 reports the factor loadings for the interior means, binary responses and probabilities of an exact value of one. Higher factor values correspond to higher PageRank and lower HHI, both within the interior and through a reduced probability of HHI exactly equal to one. They also correspond to a higher probability of being an articulation point and a lower probability of having an incident global bridge. The loading for connection to an articulation point has an interval including zero.

For dependence, the interior mean increases with the factor while the probability of an exact one decreases. Their combination in Equation (37) produces a mildly U-shaped overall response curve over the displayed factor range. It is therefore inappropriate to summarise the result as an unqualified increase in dependence with criticality.

Table 10: Loadings on the latent factor. Bounded interior means and all probabilities use logit links.

| Response component | Posterior mean | 95% HDI |
|---|---|---|
| PageRank interior mean | 0.359 | $[0.348, 0.370]$ |
| HHI interior mean | $-0.535$ | $[-0.570, -0.502]$ |
| Dependence interior mean | 0.420 | $[0.392, 0.445]$ |
| Articulation-point probability | 0.771 | $[0.682, 0.860]$ |
| Incident-global-bridge probability | $-0.637$ | $[-0.714, -0.560]$ |
| Connected-to-articulation probability | 0.110 | $[-0.015, 0.244]$ |
| Probability of HHI equal to one | $-3.982$ | $[-4.718, -3.266]$ |
| Probability of dependence equal to one | $-0.545$ | $[-0.638, -0.445]$ |

The factor is provisionally interpreted as a dimension of centrality and counterparty diversification. Descriptively, its posterior mean scores have Spearman correlations of 0.821 with PageRank and $-0.925$ with HHI. These associations use the same responses that inform the scores, so they are descriptions of the fitted factor rather than independent validation. The factor is not yet established as a comprehensive criticality index, particularly because some structural associations are poorly reproduced, as discussed below.

### 5.5.3 Posterior predictive assessment

Replicated responses are generated conditional on the posterior factors for the observed terminal-months. Checks compare observed statistics with their distributions across replicated datasets, both overall and within lagged-role groups. These are conditional, in-sample checks; they do not evaluate prediction for unseen terminals or future months. The 95% replicated intervals below are equal-tailed intervals for dataset statistics, rather than HDIs for model parameters.

#### Marginal distributions and boundary frequencies

The model closely reproduces the overall response means and the overall frequencies of HHI and dependence equal to one. The observed overall binary proportions also lie within their replicated intervals. Nevertheless, discrepancies appear in dispersion,

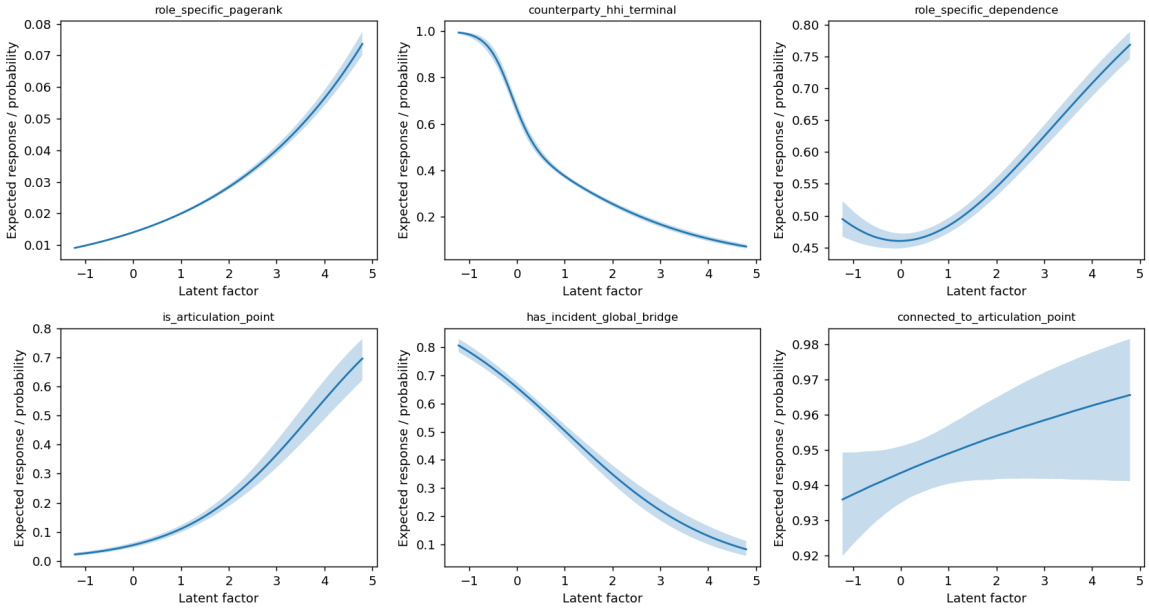


Figure 6: Fitted response functions against the terminal latent factor. Lines are posterior medians and bands are equal-tailed 95% credible intervals for conditional expected responses or probabilities. HHI and dependence means include the point mass at one. The range spans the first to the 99th percentile of posterior mean factor scores. These bands describe parameter uncertainty, not prediction intervals for individual observations.

quantiles and role-specific boundary frequencies. For example, PageRank dispersion is overestimated for lagged importers and underestimated for lagged exporters. For exporters, the observed 95th percentile of PageRank is 0.0714, compared with a replicated mean of 0.0621 and a 95% replicated interval of $[0.0588, 0.0654]$.

Table 11: Selected checks of the proportion of bounded responses equal to one, by lagged role. All entries are percentages.

| Response | Lagged role | Observed | Replicated mean | 95% interval |
|---|---|---|---|---|
| HHI | All | 34.09 | 34.09 | $[32.73, 35.45]$ |
| HHI | Importer | 41.89 | 43.41 | $[41.59, 45.20]$ |
| HHI | Exporter | 18.00 | 14.89 | $[13.39, 16.40]$ |
| Dependence | All | 20.76 | 20.77 | $[18.97, 22.62]$ |
| Dependence | Importer | 26.45 | 23.94 | $[21.68, 26.28]$ |
| Dependence | Exporter | 9.04 | 14.23 | $[11.97, 16.67]$ |

Table 11 shows that agreement in the aggregate can conceal differences between roles. The model underestimates the frequency of HHI equal to one among exporters and overestimates the frequency of dependence equal to one in that group. The importer dependence boundary frequency is also slightly above its replicated interval. These results suggest that a shared factor with common response functions does not fully represent role-specific response behaviour.

**Associations between responses**

An additional check compares pairwise Spearman correlations using 200 replicates selected evenly across the four chains. Table 12 reports selected discrepancies. In particular, articulation-point status and an incident global bridge are positively associated in the data, whereas their replicated association is negative. This discrepancy remains within each lagged-role group and is especially pronounced among exporters.

This mismatch is consistent with the restrictions of the fitted specification. A single factor raises articulation-point probability but lowers incident-bridge probability, while conditional independence supplies no additional association between those responses. The fitted rank-one, conditionally independent specification consequently struggles to reproduce their positive co-occurrence.

Table 12: Selected joint posterior predictive checks. Entries are Spearman correlations. Replicated intervals use 200 conditional in-sample replicates.

| Response pair | Lagged role | Observed | Rep. median | 95% interval |
|---|---|---|---|---|
| Articulation–bridge | All | 0.290 | −0.122 | [−0.156, −0.088] |
| Articulation–bridge | Importer | 0.137 | −0.037 | [−0.073, 0.007] |
| Articulation–bridge | Exporter | 0.546 | −0.154 | [−0.212, −0.103] |
| HHI–bridge | All | 0.533 | 0.293 | [0.251, 0.328] |
| PageRank–dependence | All | 0.314 | 0.157 | [0.113, 0.197] |

## 5.6 Chokepoint posterior analysis

### 5.6.1 Covariate associations and response relationships

Table 13 reports the regression coefficients and response loadings. Lagged neighbour activity and lagged voyage distance have positive associations with the factor, although the distance interval is close to zero at its lower endpoint. The cosine coefficient is negative with an interval just excluding zero, whereas the sine interval includes zero, providing limited evidence of a seasonal association; the sine and cosine terms should also be considered jointly before drawing conclusions about a seasonal pattern.

Table 13: Selected posterior parameters for the chokepoint model. Numeric predictors are standardised. Loadings operate on logit-linked interior means or probabilities.

| Parameter | Posterior mean | 95% HDI |
|---|---|---|
| Factor-regression coefficients | | |
| Lagged neighbour activity share | 0.103 | [0.042, 0.170] |
| log(1 + lagged voyage distance) | 0.065 | [0.005, 0.128] |
| Month sine | −0.036 | [−0.098, 0.023] |
| Month cosine | −0.064 | [−0.128, −0.004] |
| Response loadings | | |
| PageRank interior mean | 0.262 | [0.244, 0.283] |
| Betweenness interior mean | 1.026 | [0.971, 1.085] |
| Flow-share interior mean | 0.618 | [0.579, 0.659] |
| Articulation-point probability | 0.718 | [0.556, 0.871] |
| Connected-to-articulation probability | 1.204 | [0.952, 1.481] |
| Probability of betweenness equal to zero | −1.659 | [−2.574, −0.731] |

All five interior-mean or binary-probability loadings are positive, with 95% HDIs excluding zero. Higher factor values therefore correspond to higher PageRank, higher

positive betweenness, greater expected flow share, and higher probabilities of both structural classifications. The probability of betweenness equal to zero decreases with the factor. Both changes in the betweenness mixture increase its overall conditional expectation. Unlike the terminal result, connection to an articulation point has a clearly positive loading in this specification.

These response directions support a provisional interpretation as a dimension of centrality and exposure to network flows. Descriptive Spearman correlations between posterior mean factor scores and observed responses are 0.755 for PageRank, 0.986 for betweenness, and 0.855 for flow share. The particularly close relation to betweenness suggests that the fitted summary is strongly aligned with this measure. These correlations are calculated using the same outcomes that inform factor estimation and are not independent validation. Neither loading magnitudes across different links nor these descriptive correlations alone quantify each measure's contribution to a substantive criticality index.

The fitted response curves illustrate this common direction of association. Their credible bands describe parameter uncertainty at fixed factor values, rather than variation of individual replicated observations.

### 5.6.2 Posterior predictive assessment

The chokepoint checks use the same conditional, in-sample approach as the terminal checks. Overall means and both binary proportions are reproduced reasonably closely. The observed betweenness zero frequency is 0.516%, compared with a replicated mean of 0.581% and a 95% replicated interval of $[0.086, 1.290]$%. This is compatible with the observed frequency, but the small number of zeros limits information about that component. Most reported PageRank statistics lie within their replicated intervals. For betweenness, the observed fifth percentile is slightly below the corresponding interval.

Flow share shows the clearest marginal discrepancies. Its observed standard deviation is 0.0201. The replicated mean is 0.0182, with interval $[0.0171, 0.0194]$. Its observed median is 0.0159, below the replicated mean of 0.0190 and interval $[0.0178, 0.0201]$.

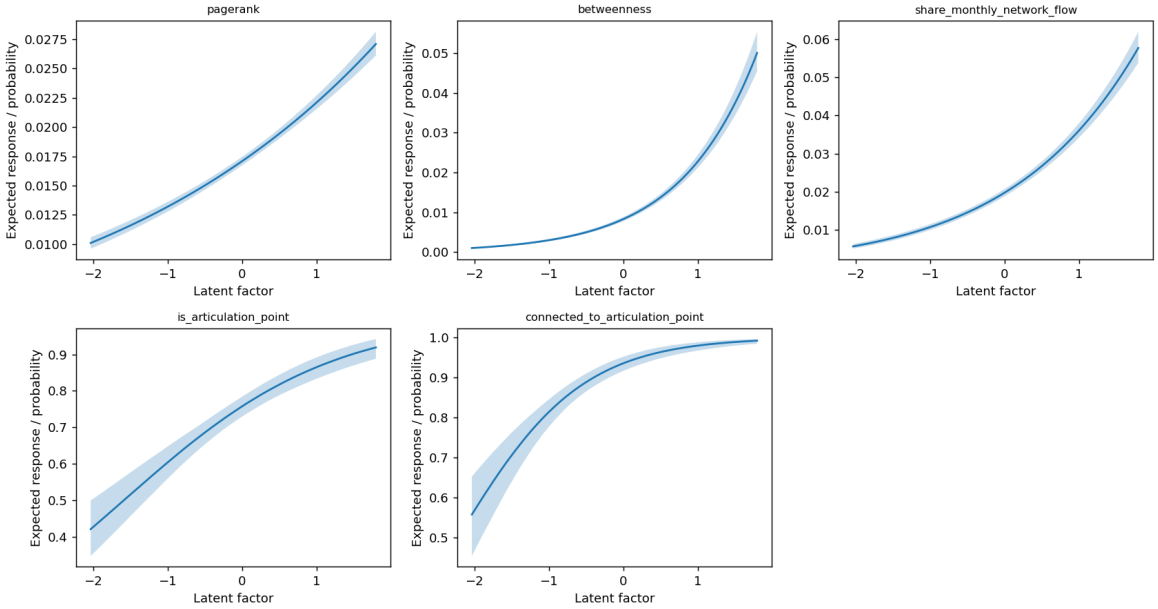


Figure 7: Fitted response functions against the chokepoint latent factor. Lines are posterior medians and bands are equal-tailed 95% credible intervals for conditional expected responses or binary probabilities. The betweenness mean includes the mass at zero. The range spans the first to the 99th percentile of posterior mean factor scores. Factor values are specific to this model and are not directly comparable with terminal scores.

The observed 95th percentile, 0.0643, is also above the interval $[0.0558, 0.0633]$. Thus matching the mean does not imply matching dispersion or distributional shape.

Joint checks use 200 replicated datasets selected evenly across the four chains. Table 14 shows that the model reproduces the PageRank–betweenness association reasonably closely, but understates associations involving flow share and the PageRank–articulation association. No sign reversal comparable to the terminal articulation–bridge discrepancy appears in these selected checks.

Table 14: Selected joint predictive checks for chokepoints. Entries are Spearman correlations; intervals use 200 conditional in-sample replicates.

| Response pair | Observed | Rep. median | 95% interval |
|---|---|---|---|
| PageRank–betweenness | 0.685 | 0.656 | $[0.611, 0.690]$ |
| PageRank–flow share | 0.672 | 0.530 | $[0.479, 0.579]$ |
| Betweenness–flow share | 0.800 | 0.717 | $[0.688, 0.750]$ |
| PageRank–articulation | 0.287 | 0.205 | $[0.145, 0.256]$ |

The fitted factor has coherent response directions, but the discrepancies indicate that one common factor with conditional independence does not fully capture the joint response distribution. This supports a cautious interpretation of the chokepoint scores as summaries under a simple baseline.

## 5.7 Prior assessment and sensitivity analysis

To assess the implications of the prior assumptions and the robustness of the posterior findings, two alternative prior profiles were investigated on the same estimation samples. The analysis considers both the prior predictive distributions and the sensitivity of posterior inference to these modifications.

### 5.7.1 Alternative prior specifications

Three prior profiles were considered: the original baseline, a regularised alternative, and a response-specific precision alternative.

The original prior predictive checks suggested that the baseline specification generated relatively broad distributions for several network measures, particularly those

characterised by small observed values, such as PageRank, betweenness, and flow share.

A second specification, referred to as the `regularised` profile, introduced tighter prior distributions for selected intercepts and factor loadings.

Specifically, the standard deviations of the logit intercept priors for the small-valued continuous responses were reduced from 1.5 to 0.7. The PageRank loading scale was reduced from 1 to 0.5, while the loading standard deviations for betweenness and flow share were also reduced from 1 to 0.5.

For the boundary components, intercept prior standard deviations were reduced from 1.5 to 1, and boundary-loading standard deviations from 1 to 0.5.

The prior centres were retained, as were the original priors for the terminal HHI and dependence interior components, regression coefficients, and binary-response parameters.

A third specification, denoted `response_precision`, retained the regularised priors and additionally introduced response-specific prior distributions for the Beta precision parameters.

The prior medians were set to

$$(\widetilde{\phi}_1, \widetilde{\phi}_2, \widetilde{\phi}_3) = (300, 10, 10)$$

for terminal PageRank, HHI, and dependence, respectively, and to

$$(\widetilde{\phi}_1, \widetilde{\phi}_2, \widetilde{\phi}_3) = (500, 100, 100)$$

for chokepoint PageRank, betweenness, and flow share, respectively.

The logarithmic standard deviation of the precision priors remained equal to 0.7. These values represent prior medians rather than fixed precision parameters.

The alternative specifications were informed by examination of the observed response distributions and prior predictive simulations. They should therefore be interpreted as data-informed sensitivity specifications rather than independently elicited prior information.

Furthermore, the comparison between the original and `response_precision` profiles involves simultaneous modifications to several prior distributions. Consequently, differences between the corresponding posterior estimates cannot be attributed exclusively to the precision priors.

### 5.7.2 Prior predictive assessment

Prior predictive simulations were used to examine the response distributions implied by the different prior specifications before conditioning on the observed responses.

Under the original specification, all simulated continuous responses remained within their theoretical support, as expected from the bounded likelihoods. However, the prior predictive distributions were generally more dispersed than the empirical distributions.

For example, the original prior predictive mean of terminal PageRank was approximately 0.075, compared with an observed mean of 0.019. A similar discrepancy was observed for chokepoint PageRank, with a prior predictive mean of approximately 0.070 against an observed mean of 0.018.

The original prior predictive distributions also assigned relatively high probabilities to exact boundary values for terminal HHI and dependence.

The mean simulated proportions of observations equal to one were approximately 0.506 and 0.496, respectively, compared with observed proportions of 0.341 and 0.208.

For binary responses, the original priors generated broad predictive intervals, generally encompassing the observed proportions, although their prior predictive means were often close to 0.5.

These results indicate that the original priors accommodated a wide range of possible response distributions, including substantial variation beyond that typically observed in the data.

The `response_precision` profile produced a marked reduction in prior predictive dispersion.

The mean replicated standard deviation of terminal PageRank decreased from 0.0584 under the original specification to 0.0289 under the alternative profile.

For chokepoints, the corresponding standard deviation decreased from 0.0542 to 0.0228 for PageRank, from 0.0329 to 0.0154 for betweenness, and from 0.0546 to 0.0278 for flow share.

Under the alternative profile, the observed standard deviations and fifth percentiles of these measures fell within their respective 95% prior predictive intervals.

Nevertheless, PageRank tails remained relatively broad, and the inclusion of observed statistics within prior predictive intervals does not, by itself, establish prior adequacy.

Moreover, the terminal HHI and dependence boundary components were unchanged between the two alternative profiles, with mean prior predictive frequencies of observations equal to one remaining close to 50%.

Overall, the alternative specification improved the prior predictive representation of dispersion for several small-valued network measures, while some discrepancies remained.

### 5.7.3 Posterior sensitivity and predictive robustness

To examine the sensitivity of posterior inference, the models were re-estimated under the `response_precision` prior profile.

The terminal fit produced no divergent transitions, a maximum reported $\widehat{R}$ of 1.01, a minimum bulk effective sample size of 782, and a minimum tail effective sample size of 2,037.

These results satisfied the implemented diagnostic screening criteria.

The chokepoint fit also produced no divergences and a maximum reported $\widehat{R}$ of 1.01. However, the minimum bulk effective sample size was 359 for the betweenness precision parameter, below the screening threshold of 400. The minimum tail effective sample size was 780.

The chokepoint sensitivity results should therefore be interpreted with some caution. A low effective sample size indicates reduced Monte Carlo precision for the affected parameter, but does not necessarily invalidate all posterior estimates.

Table 15 compares selected posterior mean regression coefficients under the original and alternative specifications.

Table 15: Selected posterior mean regression coefficients under the original and response-specific precision prior profiles. Chokepoint sensitivity estimates are provisional because the implemented ESS screening was not fully satisfied.

| Model | Covariate | Original | Sensitivity |
|---|---|---|---|
| Terminal | Lagged neighbour activity | 0.096 | 0.093 |
| Terminal | Log lagged voyage distance | 0.062 | 0.058 |
| Terminal | Log capacity | 0.409 | 0.408 |
| Terminal | Lagged exporter indicator | 1.392 | 1.407 |
| Chokepoint | Lagged neighbour activity | 0.103 | 0.103 |
| Chokepoint | Log lagged voyage distance | 0.065 | 0.066 |

The principal covariate associations were relatively stable across the compared specifications, with the selected positive associations retaining 95% HDIs excluding zero.

For terminals, the posterior intervals for terminal age and the seasonal terms continued to include zero.

For chokepoints, the cosine coefficient remained negative, with an interval just excluding zero, although the seasonal terms require joint assessment.

These findings provide some evidence of robustness of the principal covariate associations to the considered prior modifications.

However, stability of the regression coefficients does not establish stability of the estimated node-level latent factors or the resulting criticality rankings, which were not directly compared across specifications.

Some response-specific parameters exhibited greater sensitivity.

For terminals, the loading associated with the HHI-one component changed from $-3.982$ under the original specification to $-3.116$ under the alternative profile, with a sensitivity 95% HDI of $[-3.561, -2.707]$.

The loading for the incident global bridge response changed from $-0.637$ to $-0.596$.

For chokepoints, the betweenness-zero loading changed from $-1.659$ to $-0.980$, with a sensitivity 95% HDI of $[-1.615, -0.300]$.

Although the directions of these associations remained negative, their magnitudes changed. The betweenness-zero component is particularly sensitive because it is informed by only six observed zero values.

These differences cannot be attributed solely to the precision-prior modifications, since the alternative profile also introduced stronger regularisation of selected factor loadings.

Posterior predictive checks were also examined under the alternative specification to assess whether the prior modifications improved the model's ability to reproduce selected features of the observed data.

As in the preceding sections, these checks were conditional and in-sample, rather than assessments of out-of-sample predictive performance.

For terminals, the alternative specification did not substantially resolve the discrepancies identified in Section 5.5.3.

In particular, the observed correlation between articulation-point and incident-global-bridge status was 0.290, whereas the replicated median remained negative at $-0.121$, with a 95% interval of $[-0.153, -0.077]$.

This was nearly identical to the original replicated median of $-0.122$.

Role-specific discrepancies also persisted. Among lagged exporters, the observed frequency of HHI equal to one was 18.00%, compared with a replicated frequency of 14.92%.

For dependence, the corresponding frequencies were 9.04% observed and 14.31% replicated.

The upper tail of exporter PageRank remained underrepresented, with an observed 95th percentile of 0.0714 exceeding the alternative posterior predictive interval $[0.0595, 0.0662]$.

For chokepoints, the alternative specification also failed to resolve the main discrepancies identified in Section 5.6.

The observed flow-share standard deviation was 0.0201, compared with a replicated mean of 0.0182 and a 95% interval of $[0.0171, 0.0193]$.

Similarly, the observed median was 0.0159, compared with a replicated mean of 0.0190 and a 95% interval of $[0.0179, 0.0201]$.

The alternative model continued to underestimate selected associations involving flow share.

The replicated median correlation between PageRank and flow share was 0.532, compared with an observed correlation of 0.672.

For betweenness and flow share, the corresponding values were 0.722 and 0.800, respectively.

Joint posterior predictive checks were based on 200 replicated datasets. Given the incomplete ESS screening, the chokepoint sensitivity comparisons remain provisional.

Overall, the sensitivity analysis indicates that the alternative prior profile improved prior predictive dispersion and that the principal covariate associations were relatively stable across the compared specifications.

However, some boundary-component parameters were more sensitive, and the alternative priors did not substantially improve the selected posterior predictive discrepancies.

The original bounded models are therefore retained as the documented baseline for the main analysis.

Although the alternative profile improved prior predictive dispersion, it did not resolve the main posterior predictive discrepancies, and the chokepoint sensitivity fit did not fully satisfy the implemented ESS criteria.

The alternative specification is consequently treated as a sensitivity assessment rather than a replacement for the baseline.

## 5.8 Implications and limitations

The bounded rank-one models provide an initial Bayesian framework for examining common patterns across multiple measures of node importance in the LNG maritime network.

Both models respect the theoretical support and observed boundary values of the

responses, and both baseline runs satisfy the implemented MCMC diagnostic screening criteria.

The terminal latent factor is associated with centrality and counterparty diversification, while the chokepoint factor captures a common dimension of centrality and exposure to network flows.

These findings suggest that a reduced-rank representation can summarise several aspects of network position through a shared latent dimension.

However, satisfactory sampling diagnostics and agreement in selected marginal posterior predictive statistics do not establish that the models adequately represent the full joint distribution of the responses.

For terminals, the model does not fully reproduce role-specific distributions or several observed associations between structural indicators.

For chokepoints, discrepancies remain in the dispersion of flow share and in its associations with other centrality measures.

The prior sensitivity analysis in Section 5.7 provides additional context for these findings.

Although the main covariate associations were relatively stable across the considered prior specifications, some boundary-component parameters were more sensitive.

Furthermore, the alternative priors improved the dispersion of prior predictive simulations without substantially resolving the posterior predictive discrepancies.

This suggests that prior specification alone may not be sufficient to address the limitations of the current models.

Consequently, both models are retained as documented simple baselines rather than definitive representations of node criticality.

In particular, the estimated latent factors should not yet be interpreted as comprehensive criticality indices or used to establish definitive rankings of nodes.

Their robustness at the node level has not been directly assessed across prior specifications, and the factor scales are specific to the terminal and chokepoint models.

Direct comparisons of latent scores across the two node types are therefore not

justified.

Several possible extensions could address the limitations identified in the posterior predictive assessment.

First, allowing for role-specific response effects could help capture differences between importing and exporting terminals that are not fully represented by including lagged exporter status in the factor regression alone.

For example, response-specific intercepts or loadings could be allowed to vary by terminal role, permitting the relationship between the latent factor and observed network measures to differ between importers and exporters.

Second, relaxing the conditional independence assumption could allow for residual associations between responses that are not adequately explained by the common latent factor.

This may be particularly relevant for structural indicators such as articulation-point and incident-global-bridge status, whose observed positive association is not reproduced by the terminal model.

Third, more flexible likelihood specifications could be investigated for bounded responses, particularly where the model fails to reproduce observed dispersion or distributional shape, as illustrated by chokepoint flow share.

Such extensions could allow for additional heterogeneity in response dispersion or more flexible distributional relationships, while preserving the bounded nature of the observed measures.

Fourth, node-specific effects could account for persistent heterogeneity across terminals and chokepoints that is not captured by the current covariates.

These effects could also help represent dependence among repeated observations of the same node, which is not explicitly modelled in the present specification.

Finally, increasing the latent rank beyond one could allow multiple dimensions of network position to contribute to the observed responses.

A higher-rank specification could be particularly relevant if centrality, commercial dependence, and structural vulnerability cannot be adequately represented by a single

common factor.

However, introducing additional factors would increase model complexity and require further consideration of identifiability and interpretation.

These extensions are not mutually exclusive, and the posterior predictive discrepancies do not uniquely identify their underlying causes.

Their relative usefulness would need to be assessed through further model comparisons, predictive checks, and sensitivity analyses.

In addition, the present models are estimated only on observations corresponding to consecutive active months.

The resulting latent factors therefore describe network position conditional on sustained observed activity, rather than the full process determining whether a node participates in the network.

Extending the framework to incorporate node activity would allow the analysis to address both participation in the network and criticality conditional on participation.

Finally, the current posterior predictive checks are conditional and in-sample. They assess the ability of the fitted models to reproduce selected features of the observed data, but do not establish predictive performance for unseen nodes or future months.

Any future assessment of predictive performance would therefore require an appropriate out-of-sample validation strategy, taking the temporal and node-level structure of the data into account.

# Chapter 6

# Results and discussion

# Chapter 7

# Conclusions and future work

# Appendix A

# Chokepoint geometry registry

Table A.1 documents the geometries used to assess route crossings for all 28 initial PortWatch chokepoints. Published spatial geometries were used directly where available. Geometries based on published routeing coordinates were reconstructed as polygons. For the remaining passages, operational corridors or crossing gates were constructed using the geographic and navigational references indicated below. These constructed geometries serve to classify route crossings and do not represent official maritime boundaries. Four of the 28 passages were not traversed under the final route-assignment specification and were excluded from the monthly network.

Table A.1: Geometry registry for the 28 initial chokepoints

| ID | Chokepoint | Geometry source | Geometry used for route classification |
|---|---|---|---|
| CP001 | Suez Canal | World Bank | Published polygon. |
| CP002 | Panama Canal | Marine Regions reference | Operational canal centreline with an 8 km buffer. |
| CP003 | Bosporus Strait* | Marine Regions reference | Operational strait centreline with a 5 km buffer. |
| CP004 | Bab el-Mandeb Strait | World Bank | Published polygon. |
| CP005 | Malacca Strait | Marine Regions, IHO | Detailed source MultiPolygon. |
| CP006 | Strait of Hormuz | Marine Regions, SeaVoX | Detailed source MultiPolygon. |
| CP007 | Cape of Good Hope | World Bank | Published polygon. |
| CP008 | Gibraltar Strait | Marine Regions, IHO | Detailed source MultiPolygon. |
| CP009 | Dover Strait | Marine Regions, SeaVoX | Detailed source MultiPolygon. |

| ID | Chokepoint | Geometry source | Geometry used for route classification |
|---|---|---|---|
| CP010 | Oresund Strait | Marine Regions reference | Crossing gate, 45 × 8 km, oriented east–west. |
| CP011 | Taiwan Strait | Marine Regions reference | Crossing gate, 220 × 12 km, oriented northwest–southeast. |
| CP012 | Korea Strait | Marine Regions reference | Crossing gate, 130 × 10 km, oriented northwest–southeast. |
| CP013 | Tsugaru Strait | Marine Regions reference | Crossing gate, 55 × 8 km, oriented north–south and centred on the Marine Regions location. |
| CP014 | Luzon Strait | Marine Regions reference | Crossing gate, 220 × 12 km, oriented north–south. |
| CP015 | Lombok Strait | IMO routeing coordinates | Polygon reconstructed from three traffic-separation-scheme sections. |
| CP016 | Ombai Strait | IMO sea-lane reference | Crossing gate, 115 × 12 km, oriented north–south. |
| CP017 | Bohai Strait | NGA GeoNames reference | Crossing gate, 120 × 15 km, oriented north–south. |
| CP018 | Torres Strait | IMO routeing coordinates | Polygon reconstructed from the Prince of Wales Channel two-way route. |
| CP019 | Sunda Strait | IMO routeing coordinates | Polygon reconstructed from two traffic-separation-scheme sections. |
| CP020 | Makassar Strait | Marine Regions, IHO | Detailed source MultiPolygon. |
| CP021 | Magellan Strait | Marine Regions reference | Crossing gate, 55 × 8 km, oriented north–south. |
| CP022 | Yucatan Channel | NOAA/NCEI reference | Crossing gate, 230 × 15 km, oriented east–west. |
| CP023 | Windward Passage | Marine Regions reference | Crossing gate, 105 × 12 km, oriented northwest–southeast. |
| CP024 | Mona Passage | Marine Regions reference | Crossing gate, 145 × 12 km, oriented east–west. |
| CP025 | Balabac Strait* | Marine Regions reference | Crossing gate, 100 × 10 km, oriented north–south. |
| CP026 | Bering Strait* | IMO routeing coordinates | Polygon reconstructed from the two-way route through the strait. |
| CP027 | Mindoro Strait | Marine Regions reference | Crossing gate, 95 × 10 km, oriented northeast–southwest. |

| | | | |
|---|---|---|---|
| CP028 | Kerch Strait* | Marine Regions reference | Crossing gate, 26 × 5 km, oriented east–west. |

*Notes:* IDs correspond to the study registry; the original PortWatch identifiers and reference coordinates are retained in the accompanying digital file. Gate dimensions are span × thickness. Crossing gates are centred on the PortWatch reference point. The asterisk identifies passages excluded from the final monthly network because no reconstructed route crossed them under the selected 25 km tolerance. The complete geometry registry and the GeoJSON file containing the final geometries are available in the project's GitHub repository.

# Appendix B

# Sensitivity analysis of chokepoint assignments

## B.1 Purpose and method

The identification of the chokepoints traversed by each reconstructed maritime route may be affected by small spatial discrepancies between the `SeaRoute` paths and the operational chokepoint geometries. Such discrepancies can arise from the spatial resolution and simplification of the routing network, the geographic representation adopted for each passage, and small differences between a reconstructed route centreline and the corresponding transit geometry.

A sensitivity analysis was therefore conducted to quantify how the route–chokepoint assignments changed under alternative spatial specifications. Four classifications were compared: exact geometric intersection and intersections obtained after applying uniform buffers of 5, 10, and 25 km around each of the 28 candidate chokepoint geometries. The 25-km specification corresponds to the classification retained for the final network.

For each chokepoint, distances and buffers were calculated in a local azimuthal-equidistant projection centred on the geometry, allowing the tolerance distance to be measured in metres rather than in geographic degrees. Each of the 1,037 reconstructed origin–destination routes was then compared with the original and buffered chokepoint geometries. For every route–chokepoint pair, the analysis recorded the minimum geometric distance, exact-intersection status, and whether the route fell within each alternative tolerance. The same tolerance was applied to every candidate chokepoint, thereby avoiding passage-specific adjustments based on the observed routes.

## B.2 Sensitivity results

Table B.1 reports, for each candidate chokepoint, the number of reconstructed routes identified through exact intersection and under the three alternative tolerance buffers. The final column gives the number of assignments added by the 25-km specification relative to exact intersection.

Table B.1: Sensitivity of route–chokepoint assignments to alternative spatial tolerances

| **Chokepoint** | **Exact** | **5 km** | **10 km** | **25 km** | **Additional at 25 km** |
|---|---|---|---|---|---|
| Suez Canal | 151 | 151 | 151 | 151 | 0 |
| Panama Canal | 148 | 148 | 148 | 148 | 0 |
| Bosporus Strait | 0 | 0 | 0 | 0 | 0 |
| Bab el-Mandeb Strait | 147 | 147 | 147 | 147 | 0 |
| Malacca Strait | 133 | 133 | 133 | 133 | 0 |
| Strait of Hormuz | 122 | 122 | 122 | 122 | 0 |
| Cape of Good Hope | 65 | 65 | 65 | 65 | 0 |
| Gibraltar Strait | 216 | 222 | 222 | 222 | 6 |
| Dover Strait | 91 | 91 | 91 | 91 | 0 |
| Oresund Strait | 47 | 47 | 47 | 47 | 0 |
| Taiwan Strait | 152 | 152 | 152 | 152 | 0 |
| Korea Strait | 3 | 3 | 3 | 68 | 65 |
| Tsugaru Strait | 50 | 50 | 52 | 52 | 2 |
| Luzon Strait | 43 | 56 | 56 | 56 | 13 |
| Lombok Strait | 69 | 69 | 69 | 74 | 5 |
| Ombai Strait | 57 | 57 | 57 | 58 | 1 |
| Bohai Strait | 35 | 35 | 35 | 35 | 0 |
| Torres Strait | 5 | 5 | 5 | 5 | 0 |
| Sunda Strait | 51 | 51 | 51 | 51 | 0 |
| Makassar Strait | 58 | 58 | 58 | 58 | 0 |
| Magellan Strait | 2 | 2 | 2 | 2 | 0 |
| Yucatan Channel | 137 | 137 | 137 | 137 | 0 |
| Windward Passage | 10 | 10 | 10 | 10 | 0 |
| Mona Passage | 17 | 17 | 17 | 17 | 0 |
| Balabac Strait | 0 | 0 | 0 | 0 | 0 |
| Bering Strait | 0 | 0 | 0 | 0 | 0 |
| Mindoro Strait | 0 | 0 | 8 | 63 | 63 |
| Kerch Strait | 0 | 0 | 0 | 0 | 0 |
| **Total assignments** | **1,809** | **1,828** | **1,838** | **1,964** | **155** |
| **Observed chokepoints** | **23** | **23** | **24** | **24** | — |

Exact intersection identified 1,809 route–chokepoint assignments involving 23 of the 28 candidate passages. Under the final 25-km specification, the number of assignments increased to 1,964 and the number of identified chokepoints increased to 24, resulting in 155 additional assignments, or an 8.6% increase relative to exact intersection.

The assignments were stable across all four specifications for 17 of the 24 chokepoints retained in the final network. Most of the additional assignments under the final specification were concentrated in Korea Strait and Mindoro Strait, indicating that the results for these two passages were particularly sensitive to the selected spatial tolerance.

Four candidate chokepoints—Bosporus Strait, Balabac Strait, Bering Strait, and Kerch Strait—were not traversed under any of the evaluated specifications: their minimum distances from the closest reconstructed routes were approximately 71.3, 162.0, 2,617.3, and 829.7 km, respectively. They were therefore excluded from the final monthly network. The exclusion indicates that none of the reconstructed LNG routes in the study period passed within 25 km of their operational geometries, but it does not imply that the passages have no relevance to maritime traffic outside the analysed LNG network.

The 25-km tolerance was retained because it accommodates spatial misalignments between the simplified `SeaRoute` paths and the operational transit geometries while applying a uniform and transparent classification rule to all candidate passages. The exact-intersection assignments were preserved separately for reproducibility, and the sensitivity procedure did not alter the reconstructed route geometries.

# Appendix C

# Model-ready panels variables

This appendix documents the variables contained in the three model-ready panels described in Section 3.5. Variables are grouped according to their analytical role rather than their physical order in the CSV files. Flow variables are measured monthly, binary indicators take the value one when the stated condition is satisfied, and variables carrying the suffix `lag1` refer to month $t-1$. Log-transformed variables were calculated using $\log(1+x)$.

The three panels cover January 2020–December 2024. Consequently, all one-month lagged variables are unavailable in January 2020. Measures based on historical neighbours are additionally unavailable until a node has acquired at least one neighbour through a connection observed before the current month. Commercial criticality measures that require realised trade are defined only for active terminal–months.

## C.1 Node activity panel

Table C.1: Variables in the node activity panel

| Variable | Definition | Role |
|---|---|---|
| `node_id` | Unique node identifier. | Identifier |
| `period_month` | Calendar month of observation. | Identifier |
| `node_name` | Node name. | Identifier |
| `node_type` | Node category: terminal or chokepoint. | Covariate |
| `country` | Country in which a terminal is located; not applicable to chokepoints. | Covariate |
| `active` | Equals one when the node participates in the monthly network and zero otherwise. | Outcome |
| `incoming_flow` | Total LNG volume entering the node in month (t). | Descriptive |
| `outgoing_flow` | Total LNG volume leaving the node in month (t). | Descriptive |

Continued on next page

Table C.1 continued

| Variable | Definition | Role |
|---|---|---|
| incident_flow | Sum of incoming and outgoing LNG volume incident to the node. | Descriptive |
| node_throughput | Node throughput, adjusted for double counting at chokepoints. | Descriptive |
| in_degree | Number of distinct incoming neighbours in the monthly directed network. | Descriptive |
| out_degree | Number of distinct outgoing neighbours in the monthly directed network. | Descriptive |
| total_degree | Sum of monthly in-degree and out-degree. | Descriptive |
| in_voyages | Number of incoming voyage movements associated with the node. | Descriptive |
| out_voyages | Number of outgoing voyage movements associated with the node. | Descriptive |
| incident_voyage_traversals | Sum of incoming and outgoing voyage traversals incident to the node. | Descriptive |
| total_voyages | Number of voyages associated with the node, adjusted for double counting at chokepoints. | Descriptive |
| in_route_exposure | Number of reconstructed routes entering the node. | Descriptive |
| out_route_exposure | Number of reconstructed routes leaving the node. | Descriptive |
| total_route_exposure | Total reconstructed-route exposure of the node. | Descriptive |
| betweenness | Normalised weighted betweenness centrality in the monthly segment-level network. | Descriptive |
| pagerank | Weighted PageRank in the monthly directed segment-level network. | Descriptive |
| share_monthly_network_flow | Share of total monthly node throughput associated with the node. | Descriptive |
| months_since_last_active | Number of months elapsed since the node was last active; unavailable before its first observed active month. | Supplementary |
| infrastructure_type | Terminal infrastructure role, classified as import or export; not applicable to chokepoints. | Covariate |
| capacity_mtpa | Annual terminal processing capacity in million tonnes per annum; not applicable to chokepoints. | Covariate |
| log1p_capacity_mtpa | Log-transformed annual terminal processing capacity. | Covariate |
| start_year | Year in which the terminal began operating; not applicable to chokepoints. | Covariate |
| activity_lag1 | Activity status in the preceding month. | Covariate |

Continued on next page

Table C.1 continued

| Variable | Definition | Role |
|---|---|---|
| throughput_lag1 | Node throughput in the preceding month. | Covariate |
| log1p_throughput_lag1 | Log-transformed node throughput in the preceding month. | Covariate |
| voyage_count_lag1 | Number of voyages associated with the node in the preceding month. | Covariate |
| log1p_voyage_count_lag1 | Log-transformed voyage count in the preceding month. | Covariate |
| historical_neighbor_count_lag1 | Number of neighbours connected to the node by at least one edge observed up to (t-1). | Covariate |
| active_neighbor_count_lag1 | Number of historical neighbours active in (t-1). | Covariate |
| neighbor_activity_lag1 | Share of historical neighbours active in (t-1). | Covariate |
| lag_available | Equals one when preceding-month values can be calculated and zero in January 2020. | Availability |
| year | Calendar year. | Time index |
| month | Calendar month, coded from 1 to 12. | Time index |
| month_sin | Sine transformation of the calendar month. | Covariate |
| month_cos | Cosine transformation of the calendar month. | Covariate |

## C.2 Terminal criticality panel

Table C.2: Variables in the terminal criticality panel

| Variable | Definition | Role |
|---|---|---|
| terminal_id | Unique terminal identifier. | Identifier |
| node_name | Terminal name. | Identifier |
| period_month | Calendar month of observation. | Identifier |
| year | Calendar year. | Time index |
| month | Calendar month, coded from 1 to 12. | Time index |
| node_type | Node category, equal to terminal throughout this panel. | Descriptor |
| country | Country in which the terminal is located. | Covariate |
| infrastructure_type | Terminal infrastructure role, classified as import or export. | Covariate |
| capacity_mtpa | Annual processing capacity in million tonnes per annum. | Covariate |
| log1p_capacity_mtpa | Log-transformed annual processing capacity. | Covariate |

Continued on next page

Table C.2 continued

| Variable | Definition | Role |
|---|---|---|
| unit_count | Number of infrastructure units associated with the terminal. | Covariate |
| start_year | Year in which the terminal began operating. | Covariate |
| terminal_age | Difference between the observation year and the terminal start year; unavailable before the start year. | Covariate |
| terminal_role | Observed monthly role: exporter, importer, or inactive. | Descriptor |
| active | Equals one when the terminal participates in LNG trade in month (t). | Conditioning indicator |
| export_share | Share of terminal throughput represented by outgoing flow; defined for active terminal–months. | Descriptor |
| outgoing_flow | Total LNG volume exported by the terminal. | Descriptive |
| incoming_flow | Total LNG volume imported by the terminal. | Descriptive |
| throughput | Sum of outgoing and incoming LNG volume. | Descriptive |
| outgoing_voyages | Number of voyages departing from the terminal. | Descriptive |
| incoming_voyages | Number of voyages arriving at the terminal. | Descriptive |
| voyage_count | Total number of voyages associated with the terminal. | Descriptive |
| counterparty_count | Number of distinct terminal counterparties. | Descriptive |
| counterparty_country_count | Number of distinct counterparty countries. | Descriptive |
| counterparty_hhi_terminal | Role-specific HHI of flows across terminal counterparties. | Outcome |
| counterparty_hhi_country | Role-specific HHI of flows across counterparty countries. | Outcome |
| effective_counterparties_terminal | Effective number of terminal counterparties, calculated as the inverse of the terminal-level HHI. | Supplementary |
| effective_counterparties_country | Effective number of counterparty countries, calculated as the inverse of the country-level HHI. | Supplementary |
| max_dependence_generated | Maximum recipient dependence generated by an exporting terminal. | Supplementary |
| weighted_dependence_generated | Exporter-generated dependence weighted by the distribution of its outgoing flow. | Supplementary |
| country_terminal_dependence | Importing terminal's share of total LNG imports received by its country. | Supplementary |
| role_specific_dependence | Dependence measure selected according to the terminal's observed monthly role. | Outcome |

Continued on next page

Table C.2 continued

| Variable | Definition | Role |
|---|---|---|
| import_pagerank | Weighted PageRank calculated in the observed direction of LNG flows. | Supplementary |
| export_pagerank | Weighted PageRank calculated after reversing the direction of LNG flows. | Supplementary |
| role_specific_pagerank | Directional PageRank selected according to the terminal's observed monthly role. | Outcome |
| degree_undirected | Degree in the undirected projection of the active monthly network. | Structural |
| is_articulation_point | Equals one when removal of the terminal increases the number of connected components. | Outcome |
| global_bridge_count | Number of global bridges incident to the terminal. | Structural |
| global_bridge_share | Share of incident undirected edges classified as global bridges. | Structural |
| local_bridge_only_count | Number of incident local bridges after excluding global bridges. | Structural |
| local_bridge_only_share | Share of incident undirected edges classified as local-only bridges. | Structural |
| has_incident_global_bridge | Equals one when the terminal is incident to at least one global bridge. | Outcome |
| connected_to_articulation_point | Equals one when the terminal is directly connected to an articulation point. | Outcome |
| terminal_role_lag1 | Observed terminal role in the preceding month: exporter, importer, or inactive. | Covariate |
| activity_lag1 | Terminal activity status in the preceding month. | Covariate |
| throughput_lag1 | Terminal throughput in the preceding month. | Covariate |
| log1p_throughput_lag1 | Log-transformed terminal throughput in the preceding month. | Covariate |
| voyage_count_lag1 | Terminal voyage count in the preceding month. | Covariate |
| log1p_voyage_count_lag1 | Log-transformed terminal voyage count in the preceding month. | Covariate |
| mean_voyage_distance_lag1 | Role-relevant mean voyage distance in the preceding month; undefined when no applicable voyage was observed. | Covariate |
| log1p_mean_voyage_distance_lag1 | Log-transformed preceding-month role-relevant mean voyage distance; undefined when no applicable voyage was observed. | Covariate |
| historical_neighbor_count_lag1 | Number of historical neighbours observed up to (t-1). | Covariate |
| active_neighbor_count_lag1 | Number of historical neighbours active in (t-1). | Covariate |

Continued on next page

Table C.2 continued

| Variable | Definition | Role |
|---|---|---|
| lag_available | Equals one when the preceding calendar month is available and zero for January 2020. | Availability |
| neighbor_activity_lag1 | Share of historical neighbours active in (t-1). | Covariate |
| month_sin | Sine transformation of the calendar month. | Covariate |
| month_cos | Cosine transformation of the calendar month. | Covariate |

## C.3 Chokepoint criticality panel

Table C.3: Variables in the chokepoint criticality panel

| Variable | Definition | Role |
|---|---|---|
| node_id | Unique chokepoint identifier. | Identifier |
| period_month | Calendar month of observation. | Identifier |
| node_name | Chokepoint name. | Identifier |
| node_type | Node category, equal to chokepoint throughout this panel. | Descriptor |
| active | Equals one when the chokepoint is traversed in month (t). | Conditioning indicator |
| incoming_flow | Total LNG volume entering the chokepoint. | Descriptive |
| outgoing_flow | Total LNG volume leaving the chokepoint. | Descriptive |
| incident_flow | Sum of incoming and outgoing LNG volume incident to the chokepoint. | Descriptive |
| node_throughput | Chokepoint throughput, equal to one half of incident flow. | Descriptive |
| in_degree | Number of distinct incoming neighbours. | Descriptive |
| out_degree | Number of distinct outgoing neighbours. | Descriptive |
| total_degree | Sum of directed in-degree and out-degree. | Descriptive |
| in_voyages | Number of incoming voyage traversals. | Descriptive |
| out_voyages | Number of outgoing voyage traversals. | Descriptive |
| incident_voyage_traversals | Sum of incoming and outgoing voyage traversals. | Descriptive |
| total_voyages | Chokepoint voyage count adjusted for double counting across incoming and outgoing segments. | Descriptive |
| in_route_exposure | Number of reconstructed routes entering the chokepoint. | Descriptive |
| out_route_exposure | Number of reconstructed routes leaving the chokepoint. | Descriptive |

Continued on next page

Table C.3 continued

| Variable | Definition | Role |
|---|---|---|
| total_route_exposure | Total reconstructed-route exposure of the chokepoint. | Descriptive |
| betweenness | Normalised weighted betweenness centrality. | Outcome |
| pagerank | Weighted PageRank in the monthly directed segment-level network. | Outcome |
| share_monthly_network_flow | Share of total monthly node throughput associated with the chokepoint. | Outcome |
| months_since_last_active | Number of months since the chokepoint was last active; unavailable before its first active month. | Supplementary |
| degree_undirected | Degree in the undirected projection of the active monthly network. | Structural |
| is_articulation_point | Equals one when removal of the chokepoint increases the number of connected components. | Outcome |
| global_bridge_count | Number of global bridges incident to the chokepoint. | Structural |
| global_bridge_share | Share of incident undirected edges classified as global bridges. | Structural |
| local_bridge_only_count | Number of incident local bridges after excluding global bridges. | Structural |
| local_bridge_only_share | Share of incident undirected edges classified as local-only bridges. | Structural |
| has_incident_global_bridge | Equals one when the chokepoint is incident to at least one global bridge. | Outcome |
| connected_to_articulation_point | Equals one when the chokepoint is directly connected to an articulation point. | Outcome |
| activity_lag1 | Chokepoint activity status in the preceding month. | Covariate |
| throughput_lag1 | Chokepoint throughput in the preceding month. | Covariate |
| log1p_throughput_lag1 | Log-transformed chokepoint throughput in the preceding month. | Covariate |
| voyage_count_lag1 | Chokepoint voyage count in the preceding month. | Covariate |
| log1p_voyage_count_lag1 | Log-transformed chokepoint voyage count in the preceding month. | Covariate |
| mean_voyage_distance_lag1 | Mean voyage distance for voyages traversing the chokepoint in the preceding month; undefined when no applicable voyage was observed. | Covariate |
| log1p_mean_voyage_distance_lag1 | Log-transformed preceding-month mean voyage distance. | Covariate |

Continued on next page

Table C.3 continued

| Variable | Definition | Role |
|---|---|---|
| historical_neighbor_count_lag1 | Number of historical neighbours observed up to (t-1). | Covariate |
| active_neighbor_count_lag1 | Number of historical neighbours active in (t-1). | Covariate |
| neighbor_activity_lag1 | Share of historical neighbours active in (t-1). | Covariate |
| lag_available | Equals one when preceding-month information can be calculated. | Availability |
| year | Calendar year. | Time index |
| month | Calendar month, coded from 1 to 12. | Time index |
| month_sin | Sine transformation of the calendar month. | Covariate |
| month_cos | Cosine transformation of the calendar month. | Covariate |

# Appendix D

# Model specification and diagnostics

## D.1 MCMC convergence diagnostics

### D.1.1 Trace plots

The following figures present posterior densities and trace plots for selected global parameters of the baseline terminal and chokepoint models. The displayed pages include all parameters selected for the autocorrelation diagnostics, together with additional global parameters appearing on the same plotting pages. Complete plots are retained in the accompanying model outputs.

For terminals, the selection covers the lagged exporter coefficient, the PageRank loading, and the loading for the probability of counterparty HHI equal to one. For chokepoints, it covers the lagged voyage-distance coefficient, the PageRank and betweenness loadings, and the betweenness precision.

The displayed chains occupy broadly overlapping ranges, and their estimated posterior densities are similar. These visual checks complement the numerical diagnostics reported in Chapter 5; they do not by themselves establish convergence.

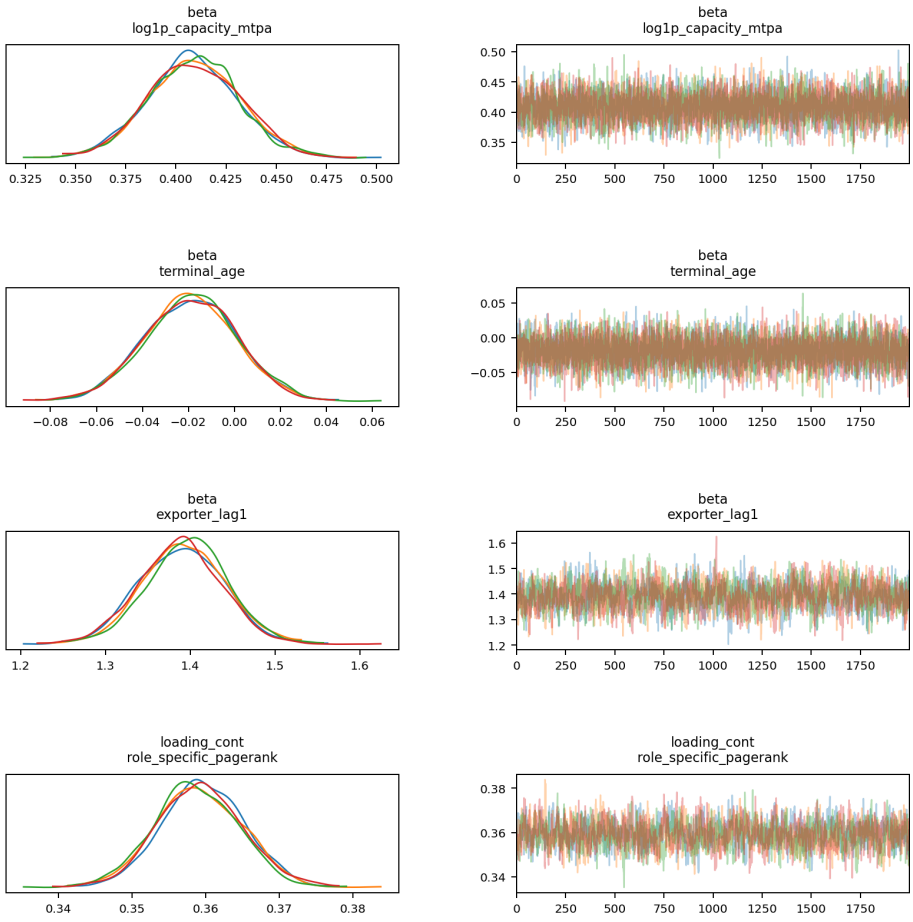


Figure 8: Posterior densities and trace plots for terminal capacity, terminal age, lagged exporter status, and the PageRank loading in the baseline terminal model.

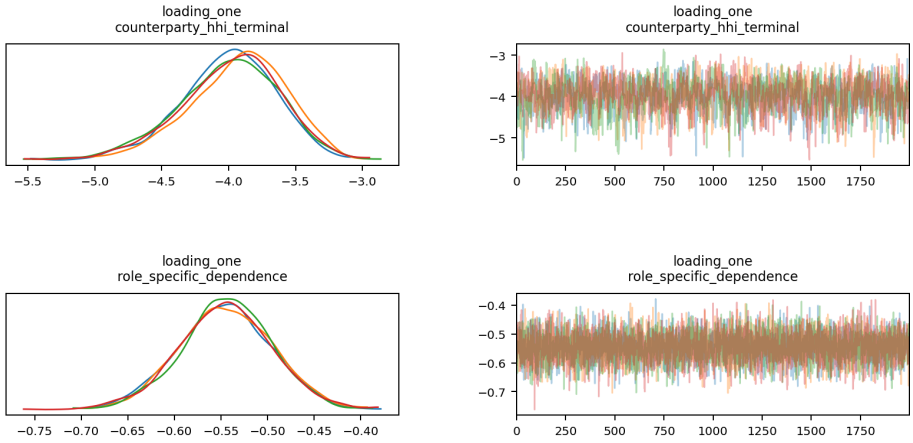


Figure 9: Posterior densities and trace plots for the loadings of the probabilities of HHI and dependence equal to one in the baseline terminal model.

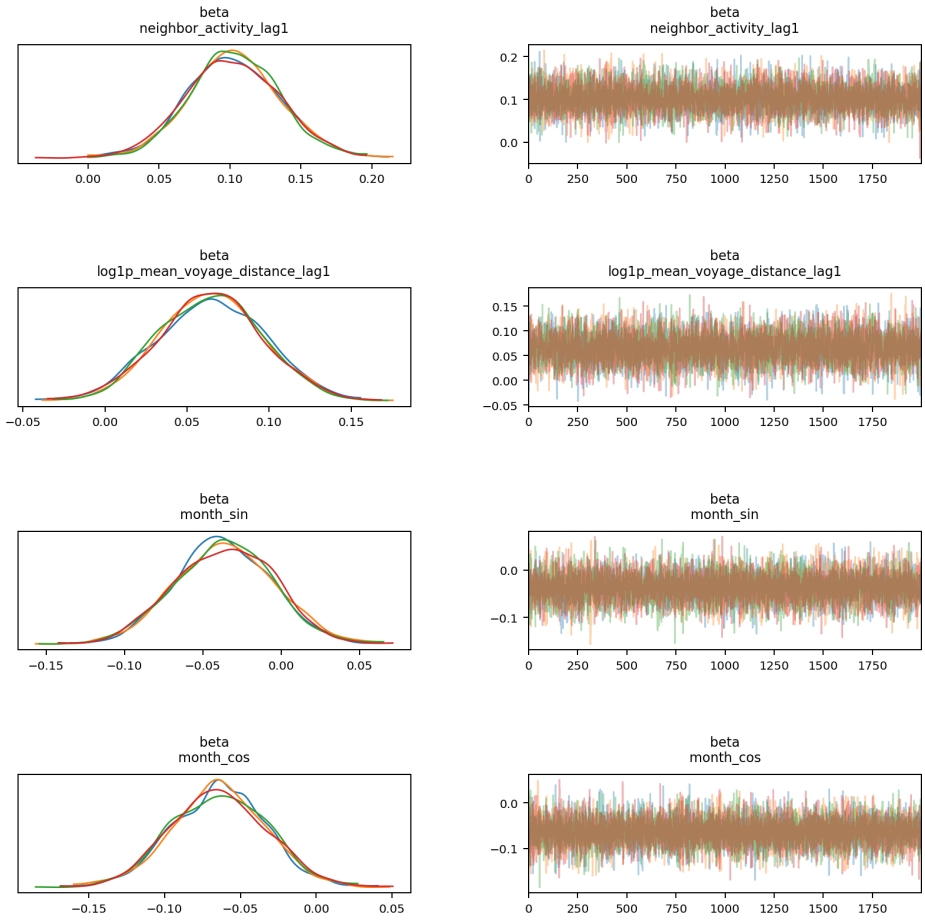


Figure 10: Posterior densities and trace plots for the regression coefficients in the baseline chokepoint model.

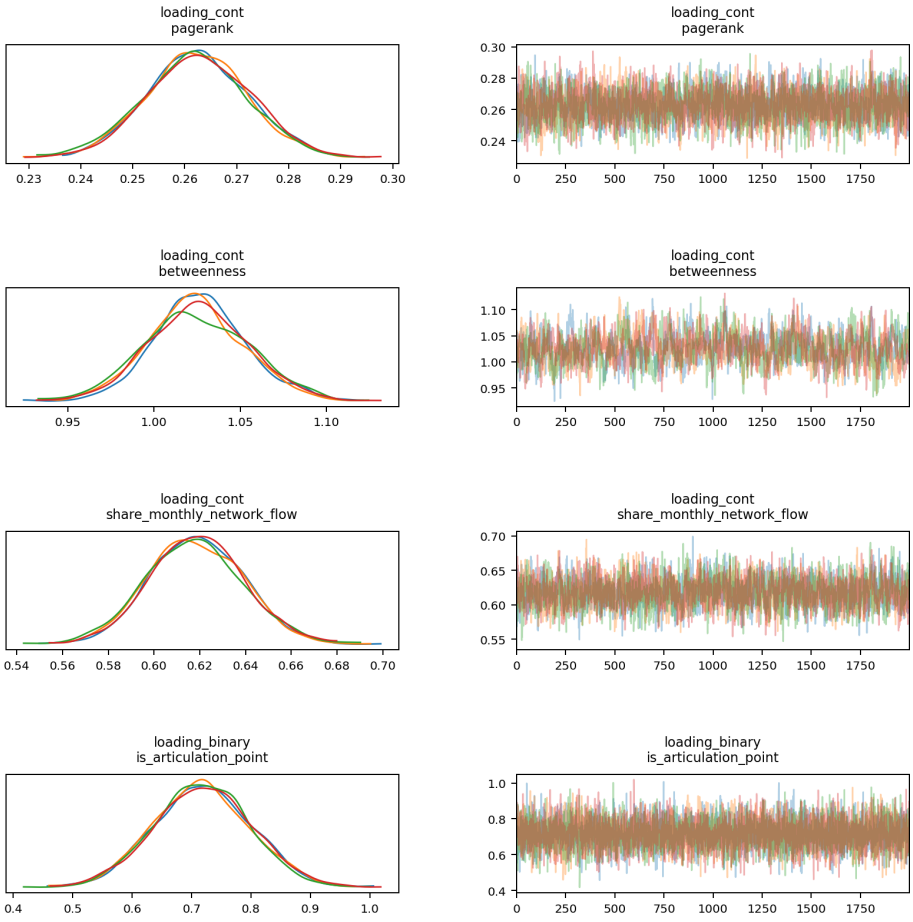


Figure 11: Posterior densities and trace plots for the PageRank, betweenness and flow-share loadings, and the articulation-point loading in the baseline chokepoint model.

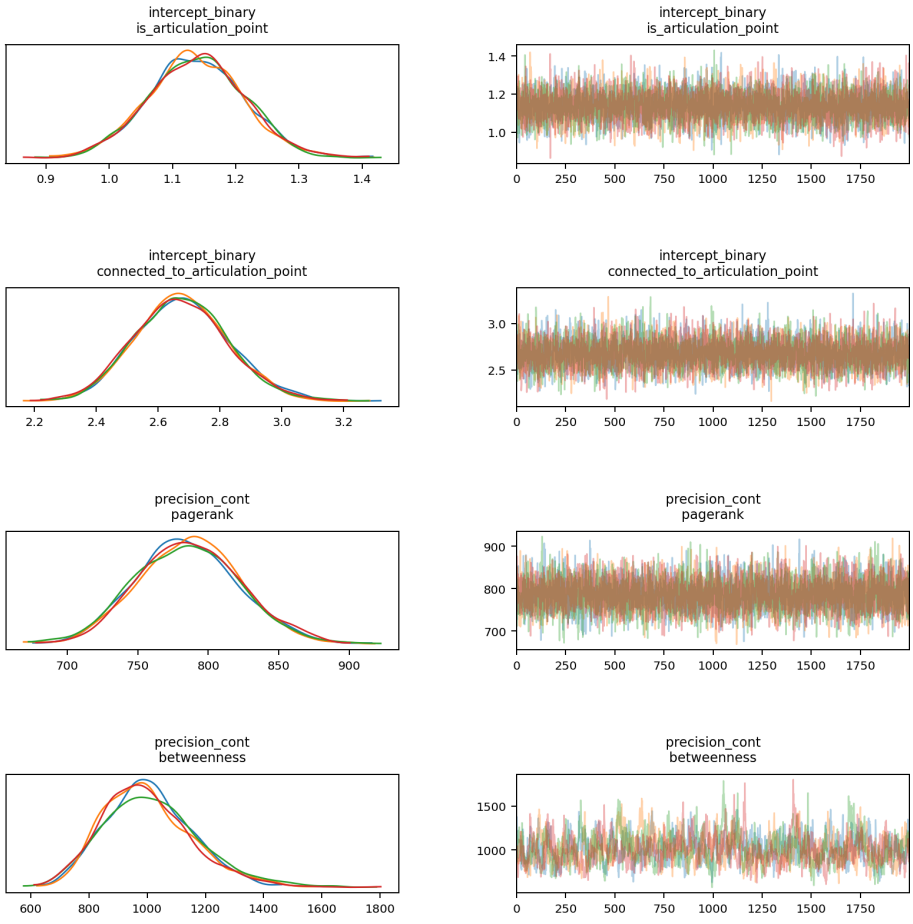


Figure 12: Posterior densities and trace plots for the binary-response intercepts and the PageRank and betweenness precisions in the baseline chokepoint model.

### D.1.2 Autocorrelation diagnostics

The following figures show within-chain autocorrelation functions for selected global parameters. Parameters were selected using the lowest bulk ESS among regression coefficients and response loadings, the lowest bulk and tail ESS among all global parameters, and the PageRank anchor loading. Duplicate selections were removed.

For terminals, the selected parameters are the lagged exporter coefficient, the loading for the probability of HHI equal to one, and the PageRank loading. Their autocorrelation decreases over the initial lags, with small fluctuations at longer lags.

For chokepoints, the selected parameters are the lagged voyage-distance coefficient, the betweenness loading and precision, and the PageRank loading. The betweenness parameters show a more gradual decay, particularly in some chains, while the other two parameters exhibit relatively little autocorrelation beyond the first few lags.

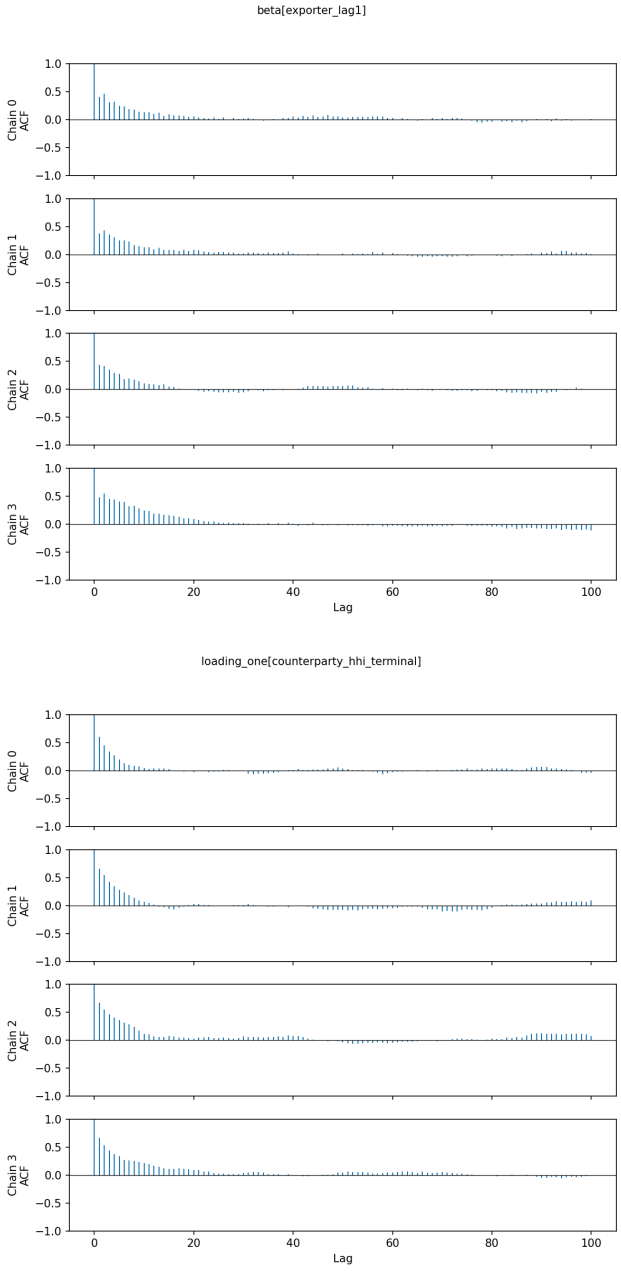


Figure 13: Within-chain autocorrelation functions for selected parameters of the terminal model.

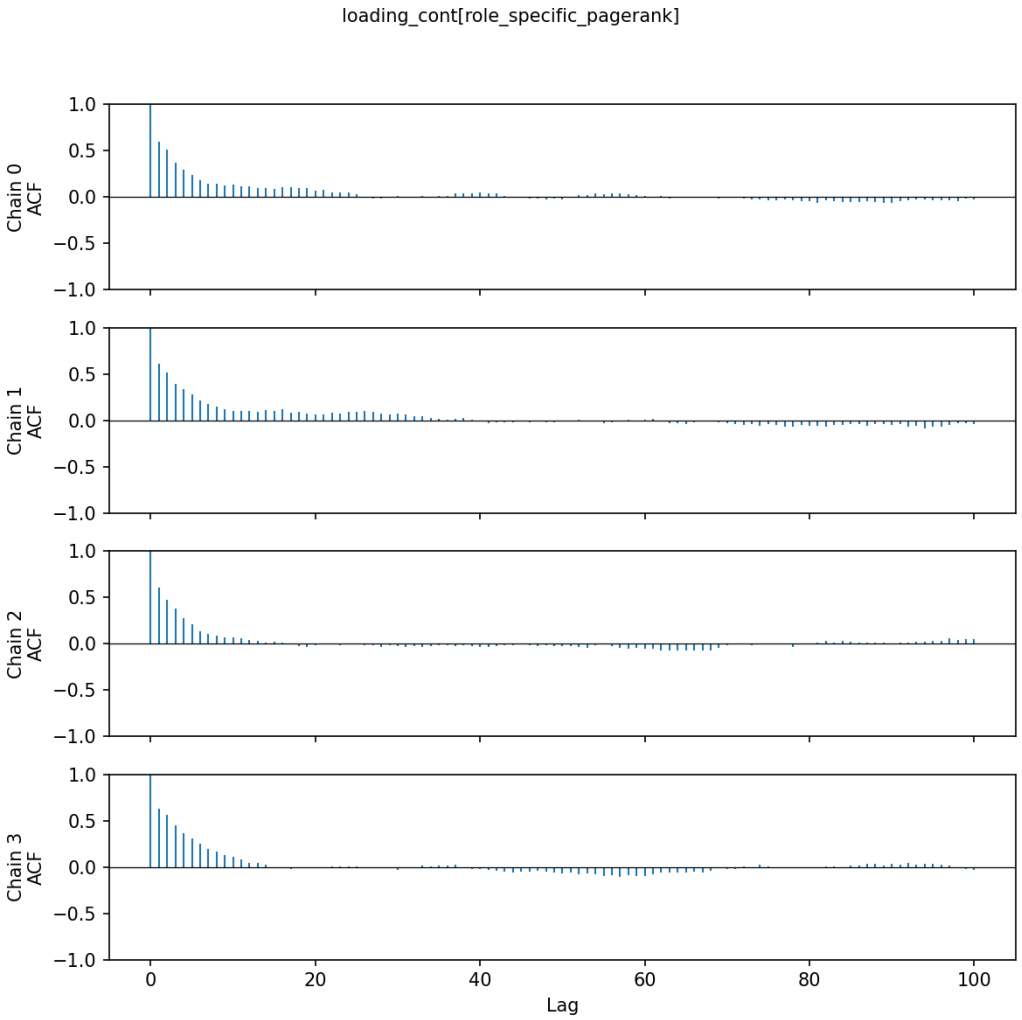


Figure 14: Additional autocorrelation diagnostics for the terminal model.

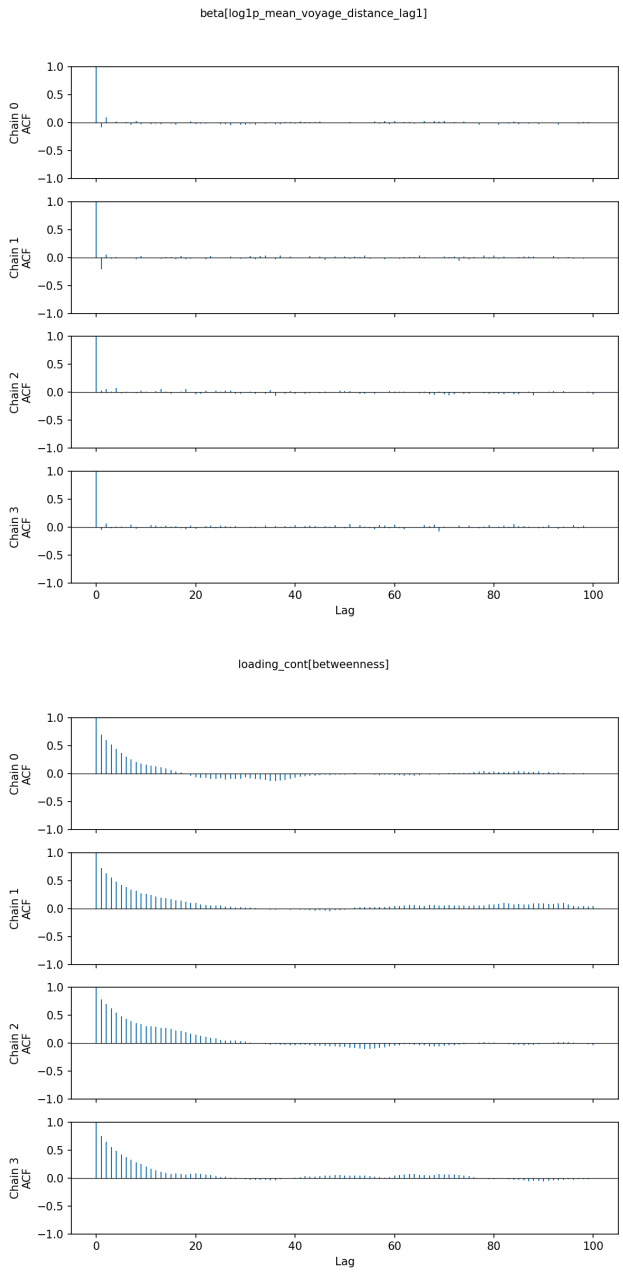


Figure 15: Within-chain autocorrelation functions for selected parameters of the choke-point model.

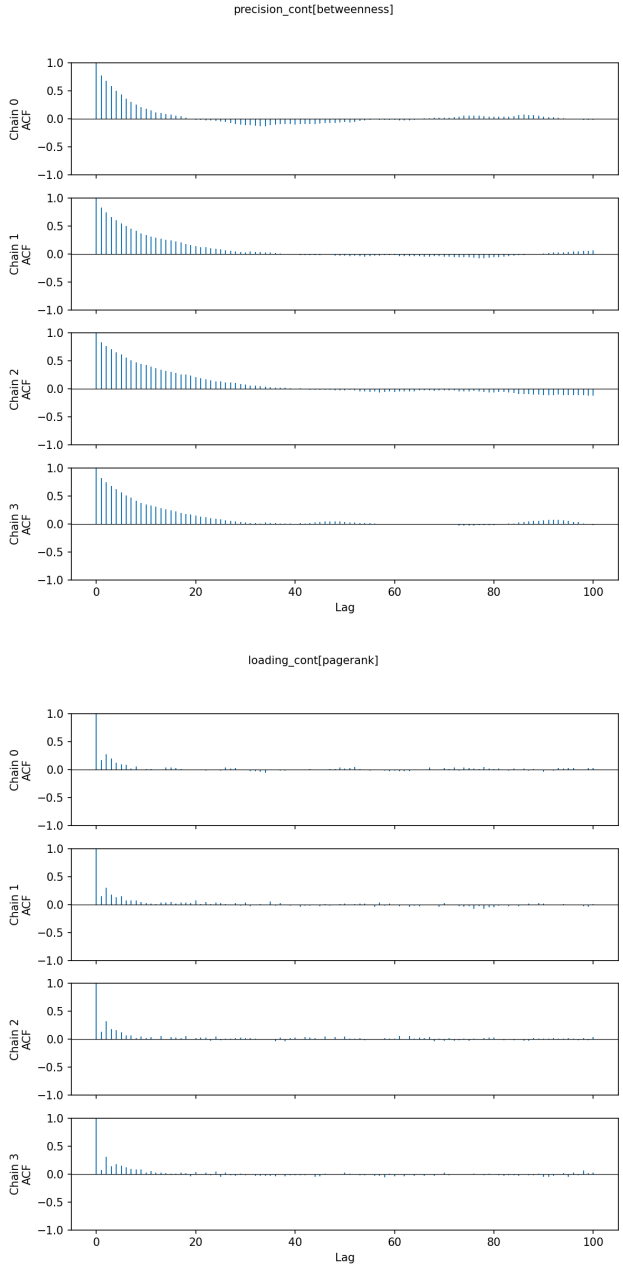


Figure 16: Additional autocorrelation diagnostics for the chokepoint model.

# Bibliography


Brandes, U. (2001). A faster algorithm for betweenness centrality. *Journal of Mathematical Sociology*, 25(2):163–177.

Brin, S. and Page, L. (1998). The anatomy of a large-scale hypertextual web search engine. *Computer Networks and ISDN Systems*, 30(1–7):107–117.

Dijkstra, E. W. (1959). A note on two problems in connexion with graphs. *Numerische Mathematik*, 1:269–271.

Eurostat (2021). SeaRoute. Computer software. Available at: `https://github.com/eurostat/searoute`. Accessed: 2026-08-16.

Flanders Marine Institute (n.d.). Marine Regions. Online geospatial database. Available at: `https://www.marineregions.org/`. Accessed: 2026-08-16.

Hirschman, A. O. (1945). *National Power and the Structure of Foreign Trade*. University of California Press, Berkeley.

International Maritime Organization (1998). Adoption, Designation and Substitution of Archipelagic Sea Lanes. Resolution MSC.72(69), International Maritime Organization. Adopted 19 May 1998, MSC 69/22/Add.1, Annex 9. Available at: `https://navcen.uscg.gov/sites/default/files/pdf/marcomms/imo/msc_resolutions/MSC69-22a1-9.pdf`. Accessed: 2026-08-16.

International Maritime Organization (2014). Routeing Measures Other Than Traffic Separation Schemes. SN Circular SN.1/Circ.326, International Maritime Organization. Issued 23 May 2014. Available at: `https://mantamaritime.com/downloads/flag_news/sn.1_circ.326.pdf`. Accessed: 2026-08-16.

International Maritime Organization (2019). New Traffic Separation Schemes. COLREG Circular COLREG.2/Circ.74, International Maritime Organization. Issued 14 June 2019. Available at: `https://www.bimco.org/media/gusfhkrc/colreg2circ74-new-traffic-separation-schemes-secretariat.pdf`. Accessed: 2026-08-16.

International Monetary Fund (2026). PortWatch Chokepoints Database. Available at: `https://services9.arcgis.com/weJ1QsnbMYJlCHdG/ArcGIS/rest/services/PortWatch_chokepoints_database/FeatureServer/0`. Accessed: 2026-09-04.

National Centers for Environmental Information (n.d.). Report for H01600A: Yucatan Channel. Online hydrographic survey record. Available at: https://www.ngdc.noaa.gov/nos/H00001-H02000/H01600A.html. National Oceanic and Atmospheric Administration. Accessed: 2026-08-16.

National Geospatial-Intelligence Agency (n.d.). NGA GeoNames: Bohai Strait. Online geographic database. Record UFI -1899028. Available at: https://geonames.nga.mil/geon-ags/rest/services/RESEARCH/GIS_OUTPUT/MapServer/0. Accessed: 2026-08-16.

Page, L., Brin, S., Motwani, R., and Winograd, T. (1999). The PageRank citation ranking: Bringing order to the web. Technical Report 1999-66, Stanford InfoLab.

Russian Federation and United States (2017). Establishment of Two-Way Routes and Precautionary Areas in the Bering Sea and Bering Strait. NCSR Submission NCSR 5/3/7, International Maritime Organization. Submitted 17 November 2017. Available at: https://safety4sea.com/wp-content/uploads/2018/05/IMO-Establishment-of-two-way-routes-and-precautionary-areas-in-the-Bering-Sea-and-Bering-Strait-2017_11.pdf. Accessed: 2026-08-16.

World Bank Data Lab (2025). Sea routes. Jupyter notebook. *Red Sea Monitoring*. Available at: https://datapartnership.org/red-sea-monitoring/notebooks/routes/2-prepare-sea-routes.html. Updated: 2025-09-30. Accessed: 2026-08-16.

Zhou, C., Ciais, P., Mittakola, R. T., et al. (2026). Global marine LNG terminals, tankers & trade: A high-resolution AIS-based dataset of LNG trade (2020–2024). *Scientific Data*, 13:1153.