

# Broadband Dual-Polarized Base Station Antenna for LTE/5G C-band Applications

Chih-Wei Hsiao and Wen-Shan Chen

Department of Electronic Engineering  
Southern Taiwan University of Science and Technology, Tainan, Taiwan  
ma630104@stust.edu.tw, chenws@stust.edu.tw

**Abstract**—In this paper, a broadband  $\pm 45^\circ$  dual-polarized base station antenna excited by a square loop structure is proposed. The operating bands of the proposed design are in LTE2300/LTE2500/C-Band/5G (3300-3600MHz). The antenna consists of two pairs of coplanar symmetrical dipoles, and two microstrip lines, and square loop-shape structures, and two metal cylinders and a reflector. The square loop-shape structure connected by the microstrip line is electromagnetically coupled to feed the dipoles, and its dipoles and metal cylinder are connected to the reflector. By changing the geometry of the square loop structures and symmetrical dipoles, the impedance bandwidth of the design is 55.88% (2.05 - 3.64 GHz), when the impedance bandwidth and isolation are defined by  $S_{11}$  less than -10dB and  $S_{21}$  less than -20dB separately. The simulated half-power beamwidth (HPBW) of the design is greater than 60 degree at 2.3 GHz, 3 GHz, and 3.6 GHz, and the simulated gain is from 5.01dBi to 8.58dBi. Since port1 and port2 are almost symmetrical, there is a stable radiation pattern in both  $+45^\circ$ -plane and  $-45^\circ$ -plane. In addition, the overall antenna architecture is simple and easy to fabricate in base stations that can be used in 4G and 5G mobile communication systems.

**Keywords**—dual-polarized antenna, square loop structure, base station antenna, LTE, 5G

## I. INTRODUCTION

With the rapid development of wireless communication technology, broadband dual-polarized antenna is widely used [1] - [8]. Dual-polarized antenna can reduce multipath fading and increase channel capacity. In order to meet the requirements of modern wireless communications, the antenna with multi-frequency, dual-polarization, and miniaturization, high gain, high isolation, low cross-polarization, front-to-back ratio and HPBW are all demand for consumer applications. Some single-polarization and dual-polarized antennas were mentioned in [1] - [8]. In [5], a coplanar asymmetrical folded dipole antenna excited by an L-shaped microstrip line to achieve a broadband, high gain, and a stable radiation pattern with a half-power beamwidth greater than 65 degree is proposed. In [6] - [8], a broadband dual-polarized antenna excited by a T-shaped microstrip line is proposed to improve the radiation pattern and achieve broadband, stable radiation pattern and high gain. In the paper, the dual-polarized antenna design is proposed and applied in the frequency bands of LTE2300, LTE2500, C-band, and 5th generation wireless

communication technologies. More results and discussions will be mentioned in detail in this paper.

## II. ANTENNA DESIGN

The dual-polarized antenna geometry is shown in Fig. 1. The photo of the design is also shown in Fig. 2. The dual-polarized configuration is  $\pm 45^\circ$ . One is located at  $-45^\circ$  and the other is located at  $+45^\circ$ . The antenna uses two square loop-shape structures connected by microstrip lines that cross each other vertically, and two pairs of coplanar symmetric dipoles, and two coaxial cables, and a reflector made of a ground that connected four reflectors with a tilt angle of 45 degree and four copper sheets of equilateral triangles. Microstrip line and square loop-shaped structure are printed on FR4 substrate (with a dielectric constant of  $\epsilon_r = 4.4$ , a loss tangent of 0.02, and a thickness of  $t = 0.8$  mm), and two pairs of coplanar symmetric dipoles are printed below the FR4 substrate. The dimension of the antenna substrate is 45 mm  $\times$  45 mm ( $W \times W$ ), and the dimension of the reflector is 80 mm  $\times$  80 mm ( $RW \times RW$ ), and the dimension of four reflectors is 18 mm  $\times$  80 mm ( $H2 \times RW$ ). The proposed antenna is fed by 50 $\Omega$  coaxial cable connected to an SMA connector. The outer conductor of the coaxial cable is soldered with the dipoles, whereas the inner across the substrate and connected the feed to the square loop-shape structure. Between the two metallic cylinders connect dipoles and the reflector. Four reflectors connect 45 degree to the bottom metal, and the four reflectors are connected with equilateral triangles form the reflector of the design. As shown in Fig. 2, the height between the reflector and the antenna is 27 mm. By properly adjusting the length and width of L3 and L4, the good impedance matching and stable radiation pattern can be achieved. Table I listed the dimensions of the antenna. The overall dimension of the antenna is 105  $\times$  105  $\times$  27 mm<sup>3</sup>. The result of simulation and analysis and the far field radiation patterns are all obtained by using HFSS.

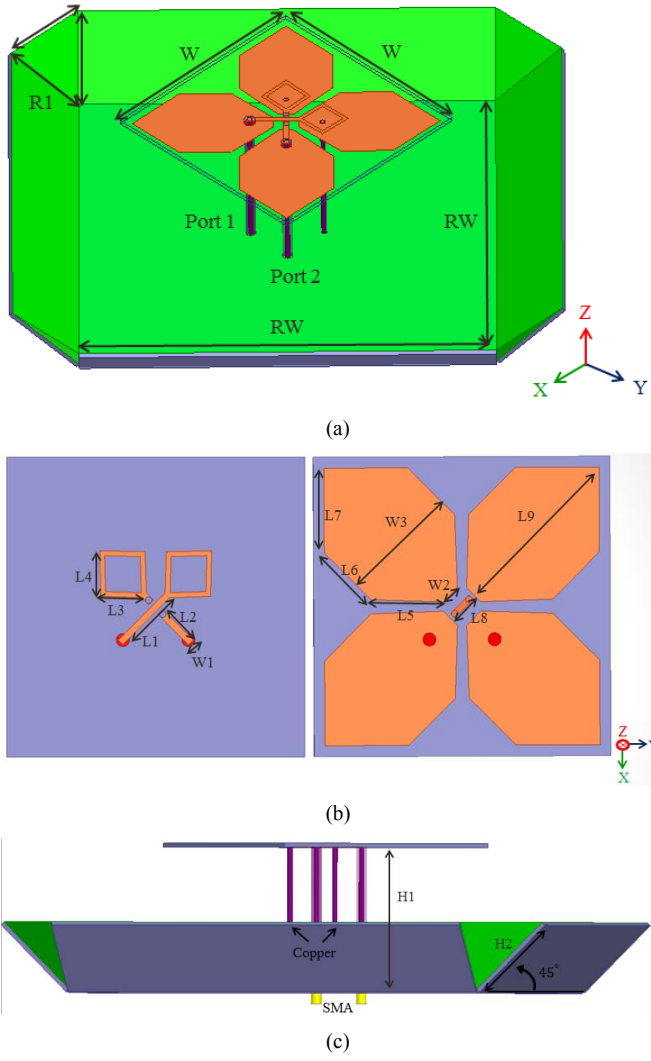


Fig. 1. Geometry of the proposed dual-polarized antenna. (a) 3-D view. (b) Front side and back side. (c) Side view.

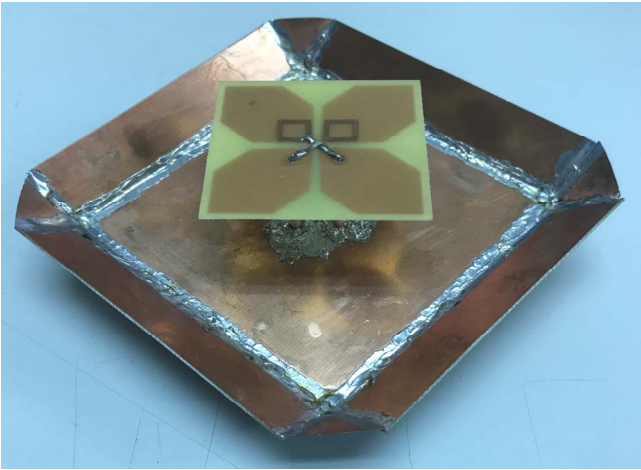


Fig. 2. Prototype of the proposed dual-polarized antenna.

TABLE I. PARAMETERS OF THE PROPOSED ANTENNA

Parameters	L1	L2	L3	L4	L5	L6
Unit (mm)	10	6.5	6.16	6.82	10.96	10
Parameters	L7	L8	L9	W1	W2	W3
Unit (mm)	12.72	4	27	1	1.5	18
Parameters	W	RW	R1	H1	H2	
Unit (mm)	45	80	18	27	18	

## SIMULATION RESULTS AND DISCUSSION

The Fig. 3 shows of the dual-polarized antennas measured and simulated  $S_{11}$  and  $S_{22}$ . The both of simulated and measured  $S_{11}$  and  $S_{22}$  can fit the bands of LTE2300/LTE2500/C-Band/5G (3300-3600MHz). The Fig. 4 shows the measured and simulated  $S_{11}$  of the two ports. And the  $S_{21}$  between the two ports are large than 20 dB over the operating bands. Table II lists the summary of antenna radiation performances of the proposed antenna. It can be found that the half-power beamwidth of the design is larger than 60 degrees, and the simulated gain is 5.01 to 8.58dBi. The Fig. 5 shows the simulated 2D radiation patterns at port 1 of the design at 2.3, 3, 3.6GHz. The design has the advantage stable gain and stable radiation patterns.

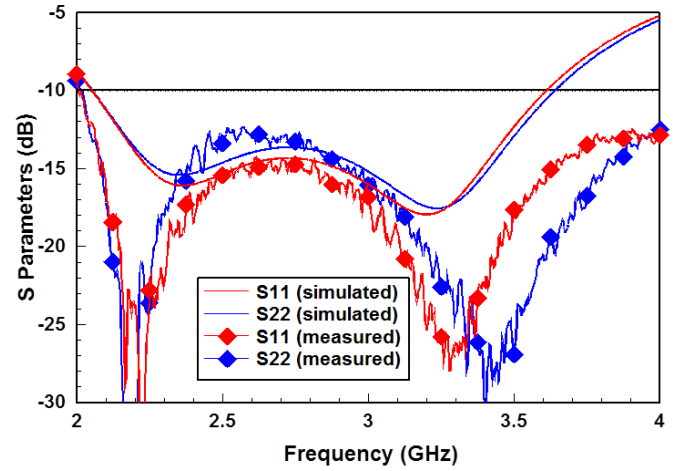


Fig. 3. Simulated and measured  $S_{11}$ ,  $S_{22}$  parameters.

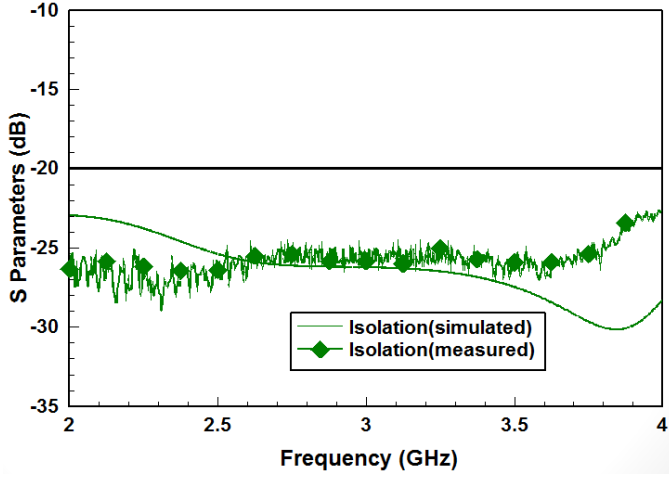


Fig. 4. Simulated and measured  $S_{21}$  parameters.

TABLE II. ANTENNA RADIATION CHARACTERISTICS AT PORT1

Frequency (GHz)	Gain (dBi)	Half-power beamwidth(°)	
		+45°-plane	-45°-plane
2.3	5.01	73.43	62.21
3	7.53	66.96	61.47
3.6	8.58	60.73	61.27

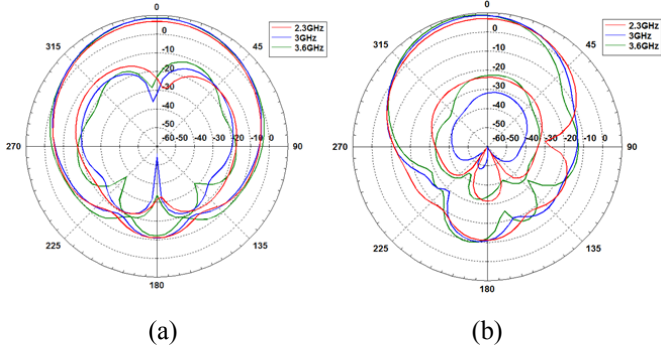


Fig. 5. Simulated radiation patterns at port 1. (a)  $\phi = +45^\circ$ -plane (b)  $\phi = -45^\circ$ -plane

### III. CONCLUSION

This paper presents a broadband  $\pm 45^\circ$  dual-polarized antenna operating in LTE, C-band, and 5G application bands. The antenna has a wide impedance bandwidth of 55.88% with  $S_{11} < -10$  dB, a stable HPBW at both  $+45^\circ$ -plane and  $-45^\circ$ -plane, a stable antenna gain varying from 5.01 to 8.58 dBi, and a high port to port isolation ( $S_{21} < -20$ dB) from 2.05 GHz to 3.64 GHz. Since port1 and port2 are almost symmetrical, there is a good radiation pattern in both  $+45^\circ$ -plane and  $-45^\circ$ -plane. In addition, the antenna structure is simple, easy to fabricate, and suitable for base station application in 4G and future 5G mobile communication systems.

### REFERENCES

- [1] Y. He, G. Wei, L. Yang, and X. Li, "A Dual-Polarized Base-Station Antenna For LTE Communication System," *2017 6th Asia-Pacific Conference on Antennas and Propagation (APCAP)*, pp. 1-4, Oct. 2017.
- [2] Y. He, Y. He, and M. M. Tentzeris, "A Broadband Dual-Polarization Base Station Antenna Element with a Coupling Feed," *2015 IEEE International Symposium on Antennas and Propagation & USNC/URSI National Radio Science Meeting*, pp. 2001-2002, Jul. 2015.
- [3] Z. Bao, Z. Nie, and X. Zong, "A Broadband Dual-Polarization Antenna Element for Wireless Communication Base station," *2012 IEEE Asia-Pacific Conference on Antennas and Propagation (APCAP)*, pp. 144-146, Oct. 2012.
- [4] Z. Li, and Y. Sun, and M. Yang, and P. Tang, and Z. Wu, "A Compact Dual-polarized Magneto-electric Dipole Antenna for 2G/3G/LTE Applications," *2017 Progress in Electromagnetics Research Symposium - Fall (PIERS - FALL)*, pp. 1338-1344, Nov. 2017.
- [5] Idayachandran G., and Nakkeeran R., "Broadband asymmetric folded dipole antenna for LTE base station," *2015 IEEE 9th International Conference on Intelligent Systems and Control (ISCO)*, pp. 1-3, Oct. 2015.
- [6] X. X. Guo, D. L. Wen, and Q. X. Chu, "A Dual-Polarized Base-Station Antenna For LTE Communication System," *2015 9th European Conference on Antennas and Propagation (EuCAP)*, pp. 1-4, Aug. 2015.
- [7] Y. He, G. Wei, L. Yang, and X. Li, "An Oval-Shaped Broadband  $\pm 45^\circ$  Dual-Polarized Base Station Antenna For 2G/3G/LTE Applications," *2017 6th Asia-Pacific Conference on Antennas and Propagation (APCAP)*, Oct. 2017.
- [8] D. Z. Zheng, and Q. X. Chu, "A Miniaturized Wideband Dual-Polarized Antenna for Base-Station Applications," *2017 International Symposium on Antennas and Propagation (ISAP)*, pp. 1-2, Oct. 2017.