A Meter-wave Ultra-wideband Array Antenna

Jia Fang, Hao Qin, Yongdong Zang
ECRIEE, East China Research Institute of Electronic Engineering
Hefei, China
fjftt@mail.ustc.edu.cn

Abstract—Accord to the airborne meter-wave electronic reconnaissance and interference need, an 150-350MHz 45deg oblique polarized antenna array is designed. The size of the log-periodic antenna are reduced by make fractal to the ordinary log-periodic antenna dipoles and load to the top, which is like a tree. The height of the antenna is also reduced, and the feed parallel lines are wrap around by dielectric materials. The antenna element and the array are simulated and optimized by FEKO, and the results shown it can achieve airborne meter-wave broadband wide-angle scan work.

Keywords- ultral-wideband; log-periodic antenna; fractal; 45deg oblique polarized.

I. INTRODUCTION

In recent years, because of the advantages of find the anti-stealth targets and counterwork anti-radiation missiles, the meter-wave radar is developed greatly. So, the need of meter-wave radar counter equipment is also growing [1].

As be a popular ultra-broadband antenna, the logperiodic antenna has a lot of advantages like technology maturation, good acclimatization, high power capacitance [2][3], which is suitable for the electronic warfare equipment use. But the ordinary log-periodic antenna has large size, which is bigger than the element spacing of a broadband wide-angle scan array, and also not suitable for the airborne platform use, need to do miniaturized design.

Accord to the airborne meter-wave broadband wideangle scan antenna array need, the transverse size and longitudinal size of the antenna are reduced by make fractal to the ordinary log-periodic antenna dipoles, load to the top and wrap around the feed parallel lines with dielectric materials. A 150-350MHz 45deg oblique polarized antenna array is designed..

II. ANTENNA ELEMENT




Figure 1. Structure of the ordinary log-periodic antenna.

The ordinary log-periodic antenna is composed by a pair feed parallel lines and some pair radiation dipoles, as shown in Figure 1 [4]. Accord to the design formula, the size of the ordinary log-periodic antenna is determined by the ratio factor τ , the interval factor σ , and the minimum work frequency [5].For 150-350MHz work, the high of the parallel lines is not less than 0.8m, and the length of the longest dipole is about 1m. But for the 350MHz scan 45deg work, the element spacing of the antenna array must be less than 0.45m. When the ordinary log-periodic antenna is used for the array, there is too much overlap of the dipoles, which will bring seriously deteriorate of the cross-polarization, the coupling, the sideline level, the gain and other indicators of the antenna. The 0.8m height of the antenna could not meet the installation requirements of the airborne platform.




Figure 2. Structure of the tree antenna.

The tree antenna is composed by feed parallel lines, fractal dipoles, and metal sticks, which are load to the top of dipoles, as shown in Figure 2. Two metal sticks are add to the dipole in the two thirds of the normal dipole, and the length of each one is 1/3 of the normal dipole, as 19-22 metal sticks shown in Figure 3, which calls the first order fractal dipole. In the same way, do the fractal again to each section of the first order fractal dipole, which calls the second order fractal dipole, as shown in Figure 3. The length of the dipoles are reduced by the fractal structure, and the lowest work frequency is further reduced by load metal sticks to the top of dipoles, which make the transverse size of the antenna drop to the half of ordinary log-periodic antenna. So the antenna could be the element of an antenna array with scan ±45deg. The length of the feed parallel lines, which is also the height of the antenna, is also reduced to be 53% of the ordinary log-periodic antenna, which is suitable for the airborne platform use.




Figure 3. Structure of the first order and second order fractal dipole.




Figure 4. Simulation model of the tree antenna.

The antenna element is simulated and optimized by FEKO software, as shown in Figure 4. The feed parallel lines are wrap around by dielectric materials, to reduced the antenna port impedance to be easy match, which serve also support weight. After be optimized, the height of the antenna is 400mm, and the size is 700mm×300mm. Figure 5 is the Voltage Standing Wace Ratio (VSWR) results of the antenna, and it's blow 2 at whole work band. Figure 6 is the normal gain of the antenna.




Figure 5. VSWR of the antenna element.




Figure 6. Normal gain of the antenna element.

III. ARRAY ANTENNA

The antenna array is simulated by FEKO software, as shown in Figure 7. The size of the array is 2×6. For 350MHz scan 45deg work with no grating lobe, the horizontal element spacing choose 400mm. There's no scan in vertical direction, so the vertical spacing could be bigger and is 700mm.

In order to improve the low frequency performance of the antenna array, some parasitic dipoles are add to between each antenna elements, and the high is lower than the lowest dipole of the antenna, as shown in Figure 7. The length and height of the parasitic dipole are 270mm and 120mm.

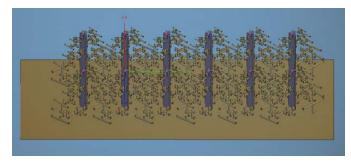


Figure 7. Simulation model of the array antenna.

The antennas are re-optimized, Figure 8 are the VSWR results of the array, and all are blow 2.4 at whole work band. Figure 9 is the normal gain of the array, and it's bigger than 11.5dBi. Figure 10 is the lobe pattern of the array at horizontal direction at 150MHz, 250MHz and 350MHz without scan, and Figure 11 is scan 45deg.




Figure 8. VSWR of the array.




Figure 9. Normal gain of the array.

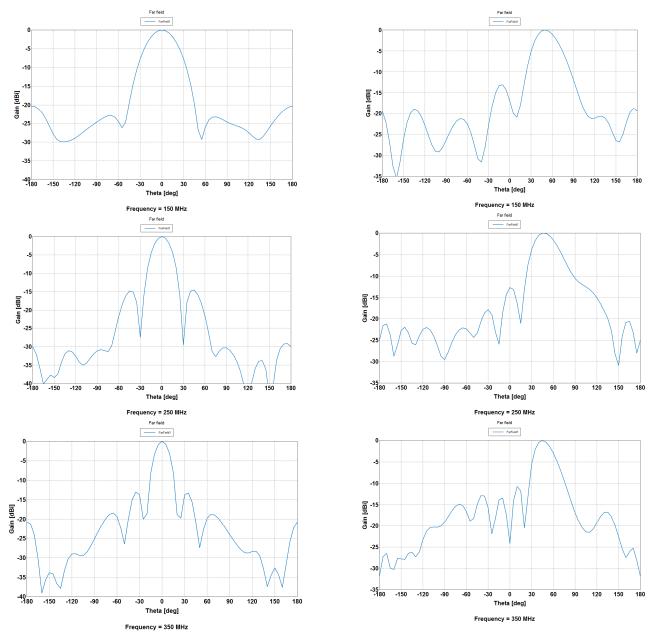


Figure 10. Lobe pattern of the array at horizontal direction without scan.

Figure 11. Lobe pattern of the array at horizontal direction with scan $45\deg$ REFERENCES

IV. CONCLUSION

[1] R. A. Poisel, "Antenna Systems and Electronic Warfare Applications", published by Artech House, INC, 2012

By make fractal to the ordinary log-periodic antenna dipoles, load to the top and wrap around the feed parallel lines with dielectric materials, the transverse size and height of the antenna are the half 53% of the ordinary log-periodic antenna, which could achieve the airborne meter-wave broadband wide-angle scan antenna array need size. The antenna array is simulated and optimized by FEKO software, and the results shown it meet the needs of the system work.

- [2] D. E. Anagnostou, "A Small Planar Log- periodic Koch- pipole Antenna," IEEE Antennas and Propagation Society International Symposium 2006, Albuquerque, 2006.
- [3] A. A. Gheethan, "Log- periodic Dipole Arrays," International Symposium 2008, San Diego, CA, USA, July 5- 12,2008.
- [4] X. J. Kang, "Antenna Theory and Design", Beijing, National Defense Industry Press, 1995.
- [5] C. L. Yuan, "Ultra-broadband Antenna Theory and Technology", Haerbin, Haerbin Industry University Press, 2006.