
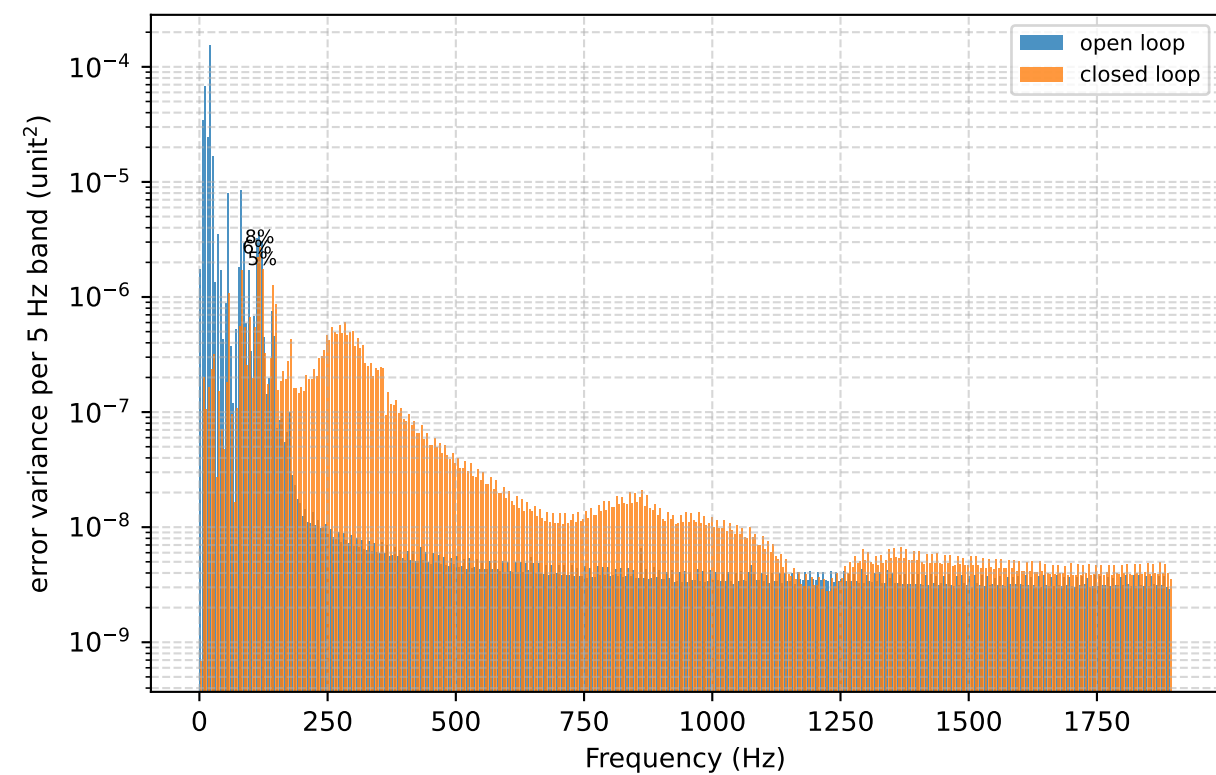
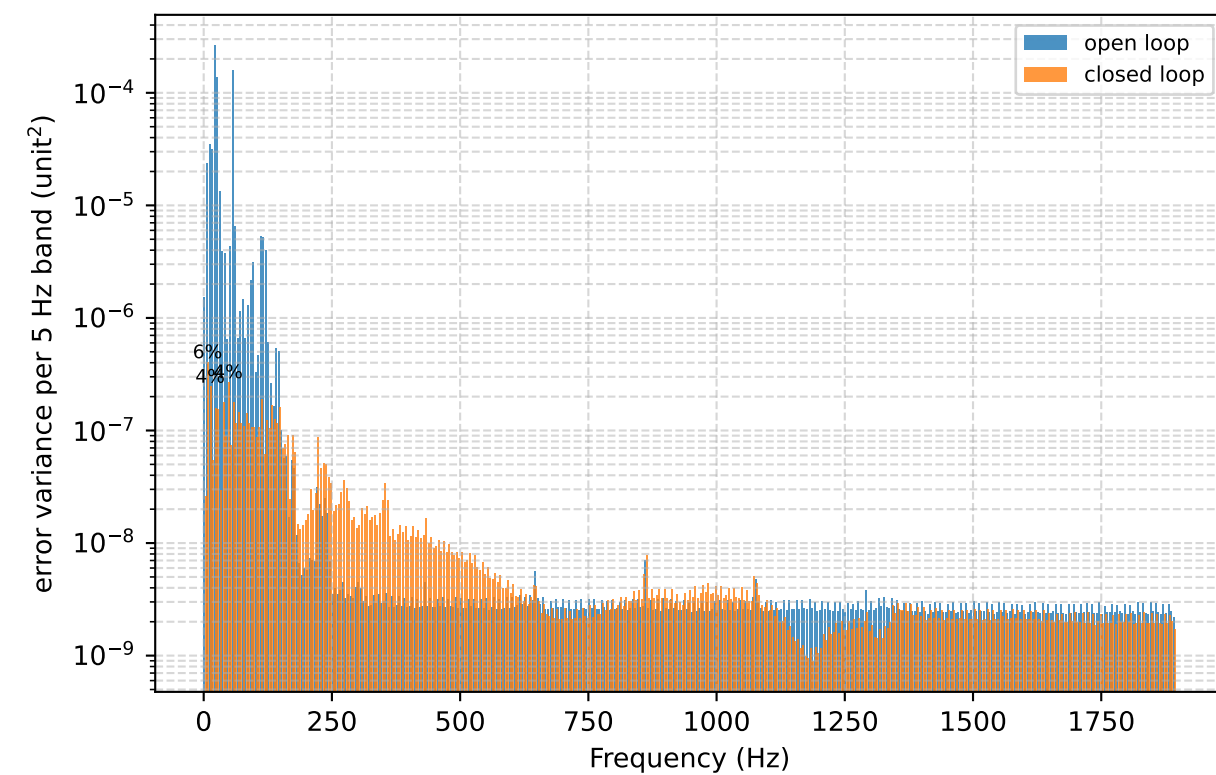
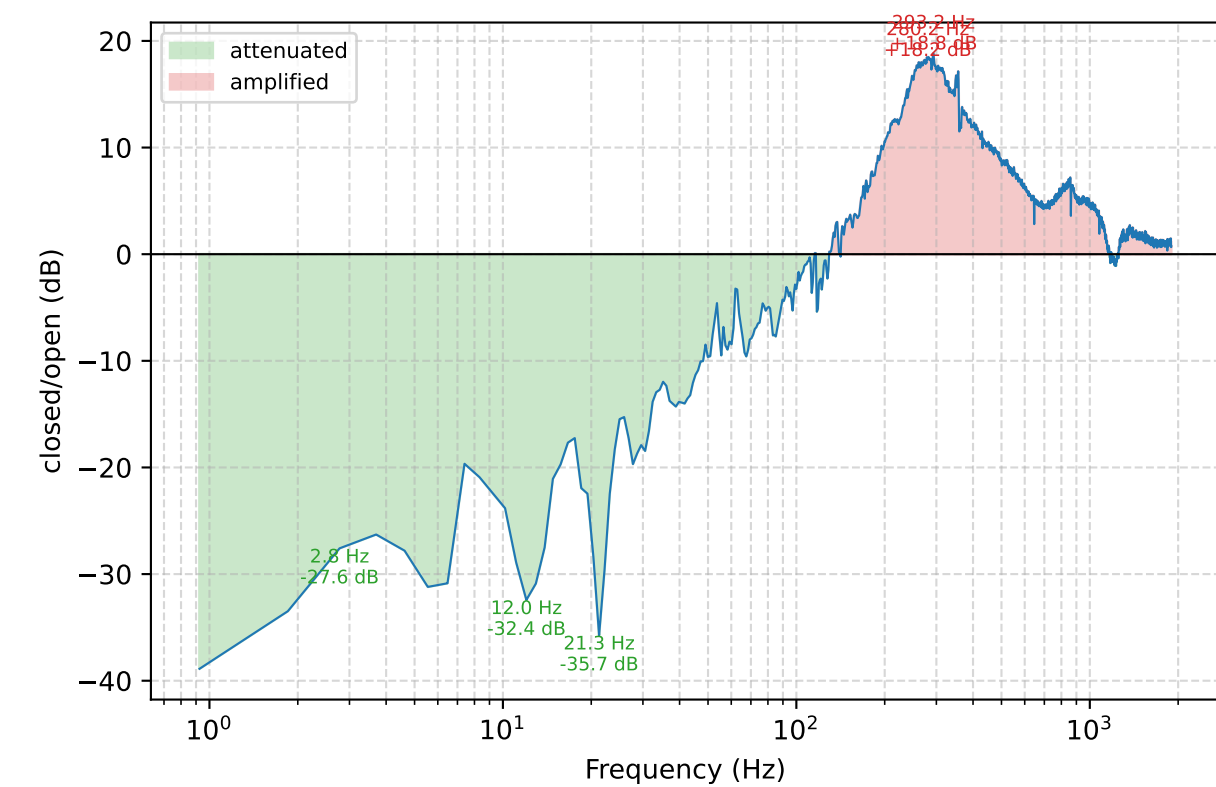
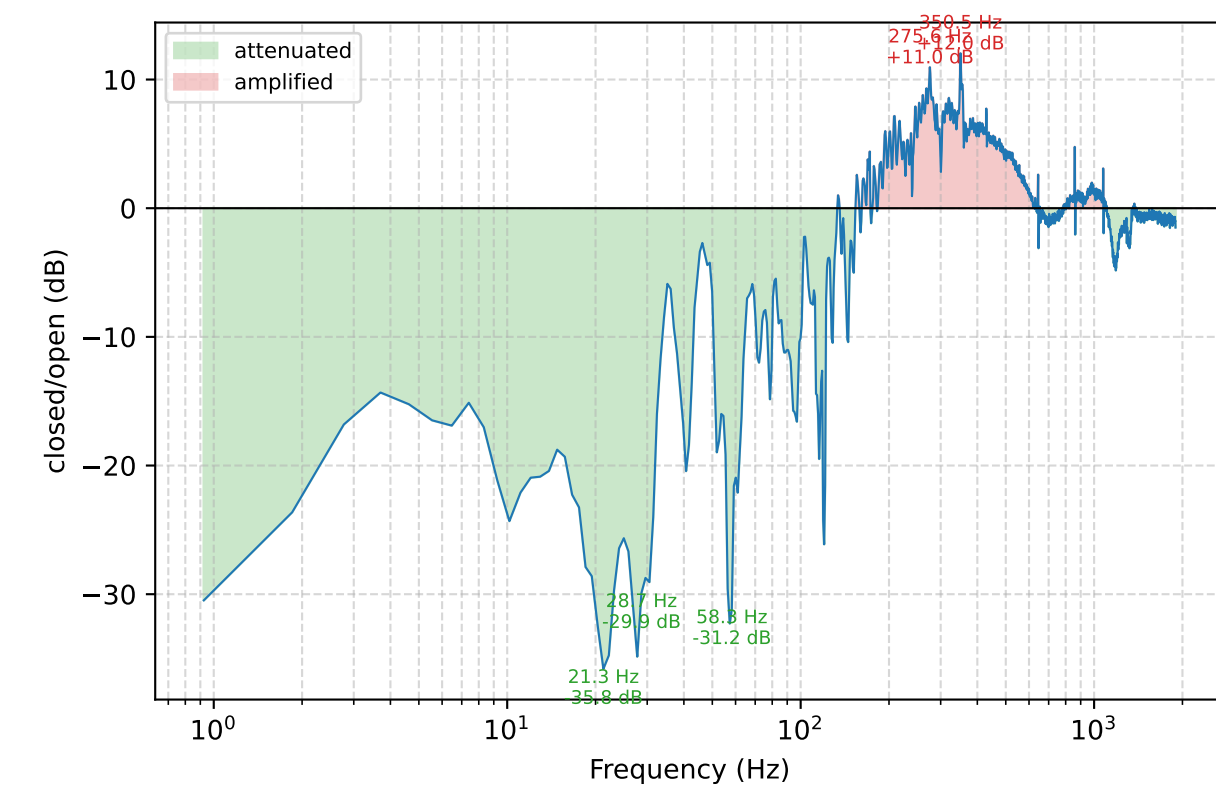
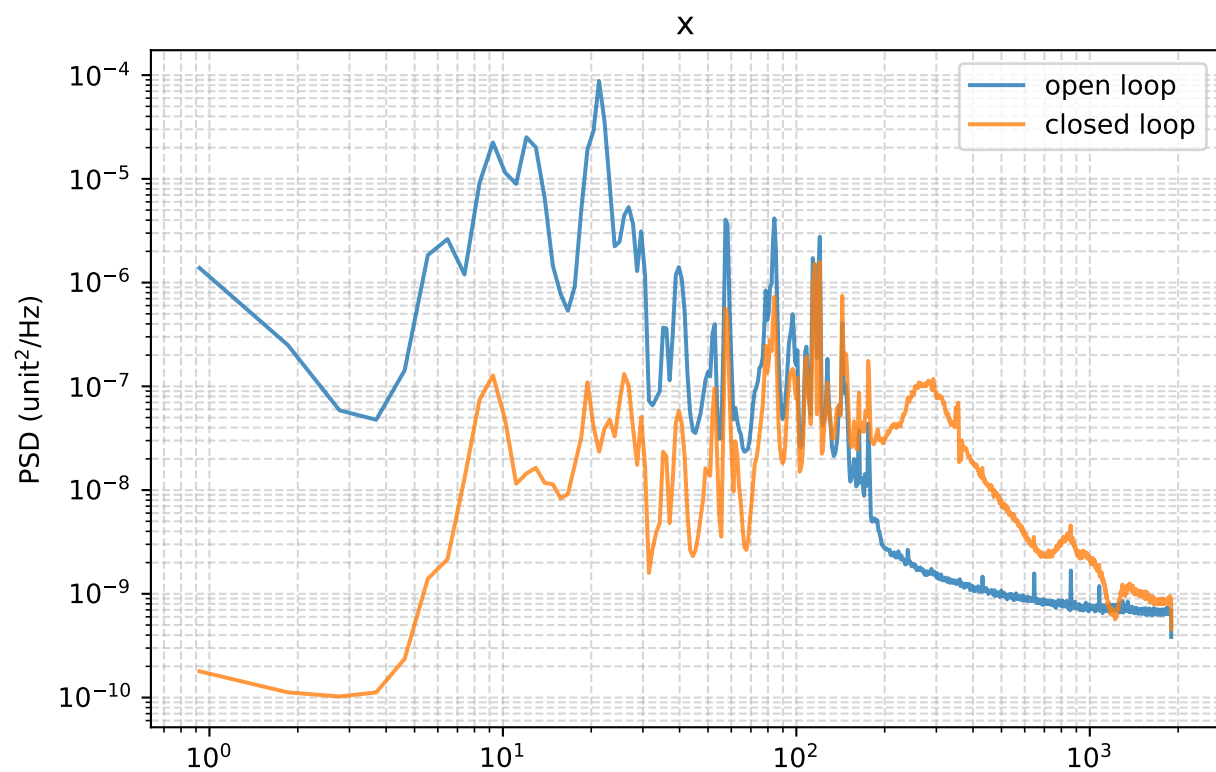


Closed-loop attenuation

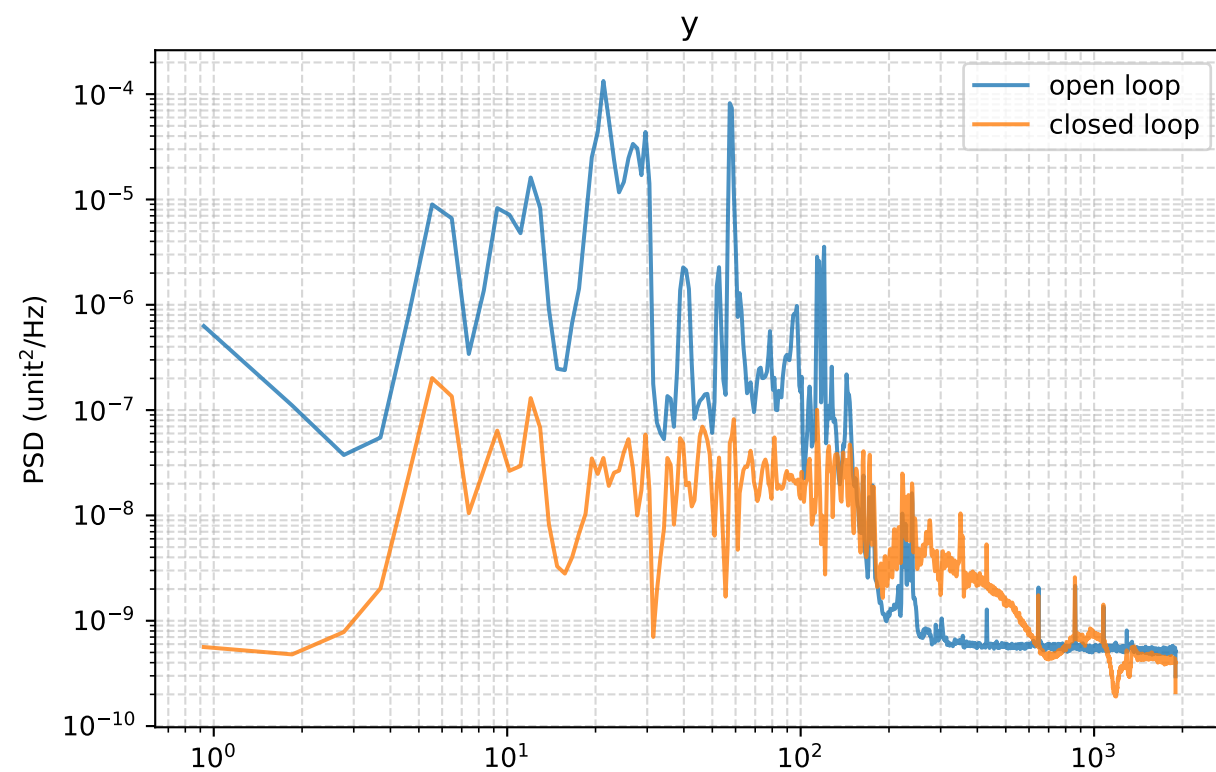

Run configuration and per-band RMS

Started: 2026-07-31 13:39:19
pixel_scale: 15.5 px per output unit
y: mean -1.743 -> -0.000 px; RMS about mean 0.469 -> 0.039 px (open -> closed)
x: mean +3.534 -> -0.000 px; RMS about mean 0.316 -> 0.091 px (open -> closed)

Config used:
SPLICED FIGURE -- open phase from PAR-3, closed phase from PAR-5.
PAR-5's own open phase is VOID: a mount bump at t~200 s pinned the beam against the ROI edge for the rest of the open window (its raw open figures were y 2.51 / x 6.70 px). Only its CLOSED phase is used here.
Reference chosen for ENVIRONMENT match, not recency: PAR-5's clean pre-bump window (t=110-200 s) read y 0.456 / x 0.339 px, vs PAR-3 y 0.465 / x 0.312 and PAR-4 y 0.553 / x 0.423. PAR-4 is the same day but 21%/25% larger, which would flatter the rejection ratio.
The 'mean -> mean' figures on page 2 mix runs by construction (open mean is PAR-3's, closed is PAR-5's) and are not a within-run drift measurement. The RMS-about-mean pair IS the comparison of interest.
Open PSD interpolated onto the closed run's frequency grid (the two runs measured fs 3788.11 vs 3788.22, up to ~12% of a bin apart).

RMS contributed by each 10 Hz band (px)				
band (Hz)	y open	y closed	x open	x closed
0-10	0.0778	0.0102	0.0932	0.0070
10-20	0.1260	0.0085	0.1493	0.0080
20-30	0.3104	0.0087	0.2018	0.0115
30-40	0.0645	0.0071	0.0341	0.0066
40-50	0.0324	0.0093	0.0226	0.0053
50-60	0.1984	0.0078	0.0459	0.0174
60-70	0.0413	0.0079	0.0108	0.0052
70-80	0.0251	0.0074	0.0237	0.0127
80-90	0.0217	0.0079	0.0521	0.0232
90-100	0.0357	0.0072	0.0234	0.0149
100-110	0.0138	0.0068	0.0156	0.0133
110-120	0.0502	0.0078	0.0408	0.0344
120-130	0.0331	0.0074	0.0289	0.0223
130-140	0.0101	0.0084	0.0090	0.0106
140-150	0.0158	0.0081	0.0170	0.0225
150-160	0.0061	0.0059	0.0061	0.0090
160-170	0.0043	0.0052	0.0060	0.0100
170-180	0.0049	0.0061	0.0063	0.0130
180-190	0.0021	0.0026	0.0035	0.0088
190-200	0.0016	0.0027	0.0028	0.0086
200-210	0.0018	0.0034	0.0025	0.0093
210-220	0.0018	0.0034	0.0023	0.0096
220-230	0.0036	0.0057	0.0024	0.0103
230-240	0.0032	0.0049	0.0023	0.0120
240-250	0.0025	0.0042	0.0022	0.0139
250-260	0.0013	0.0031	0.0021	0.0152
260-270	0.0013	0.0035	0.0020	0.0152
270-280	0.0014	0.0040	0.0020	0.0159
280-290	0.0013	0.0031	0.0020	0.0160
290-300	0.0013	0.0027	0.0019	0.0155
total 0-300	0.4138	0.0352	0.2876	0.0799