FLOWSEAL MS

brands you trust.

FLOWSEAL® MS - Triple Offset Valves

CRANE®

www.cranecpe.com

Key Features

Proven triple offset design for a variety of applications requiring zero leakage* performance. This design offers quality and reliability with superior customer service and support.

Key Features

1. Metal seated, triple offset design provides bi-directional zero leakage* shutoff
2. Self-centering disc prevents binding due to thermal shaft expansion
3. Clamped seal ring with flat gasket provides even compression and consistent sealing performance
4. Supported shaft prevents shaft deflection and seal leakage
5. Inherently fire-safe design

*Zero Leakage - in accordance with the following standards: API 598 (Soft Seat), API 6D (Soft Seat), FCI 70-2 Class VI.

Overview & Applications

Overview

Size:	DN 80 - 600 NPS 3" to 24"
Class:	PN 10-40 Class 150-300
Materials:	Carbon steel Stainless steel High alloys
Body Types:	Lug Double Flange
Temperature Range:	-120°C to +550°C -184°F to +1000°F
Fire-Safe tested:	acc. API 607 Rev. 4

Applications

Refineries
Crude oil / Product tank storage
Crude unit
Dock / Marine
FC Cracking unit
Hydro-treating
Hydrogen plant
Isomerization
Product blending & loading rack
Reforming
Steam systems
Vacuum unit
Visbreaker

Chemical Plants
Process
Utilities

Power Industry
District heating
Steam and water applications

Offshore/Onshore
Gas and oil storage tanks
Petrochemicals
Process in treatment and purification plants
Process on platforms
Tank Farms

Pulp and Paper
Reduction process
Steam applications
Water applications

Steel Mills
Hot gas and steam applications

Water Industry
Desalination
Water
Water treatment
Waste water

Triple Offset Design

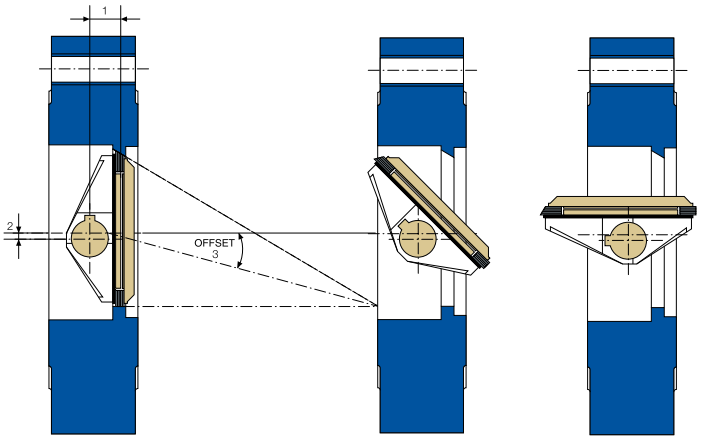

As the name implies, there are three separate offsets designed into the valve. Two of the offsets apply to the location of the shaft with respect to the center line of the bore and the center line of the disc/seat sealing surfaces.

The third offset in the design is the axis of the seat cone angle that is inclined from the center line of the valve bore to minimize rubbing of the seat/seal contact surfaces during operation and to preserve sealing integrity over the cycle life of the valve. This wide angle seat also eliminates wedging or binding of the disc.

The Flowseal MS features unique designs in the disc /shaft engagement and in the precision-machined seat and seal ring of identical eccentric shape. These features, combined with the eccentric movement, provide longer cycle life, lower operating torque, and increased temperature capability. Additionally, the torque-seated resilient metal seal ring assures consistent bi-directional zero leakage* performance.

A Superior Solution to Gates and Globes

In comparison to gate and globe valves, Flowseal Metal Seated TOV provides users with the following benefits:

1. Exceptional flow control, high Kv (Cv), and low Delta P in a single valve
2. Zero leakage* capability that results in enhanced performance and safety
3. Longer in-service life leading to lower costs of maintenance and replacement
4. Replaceable seal ring which allows for quick, easy repair
5. Lower operating torque and quarter-turn design requiring minimal actuation
6. Smaller, lighter valve resulting in lower shipping, handling, and installation costs

*Zero Leakage - in accordance with the following standards: API 598 (Soft Seat), API 6D (Soft Seat), FCI 70-2 Class VI.

Key Design Features

Key Design Features

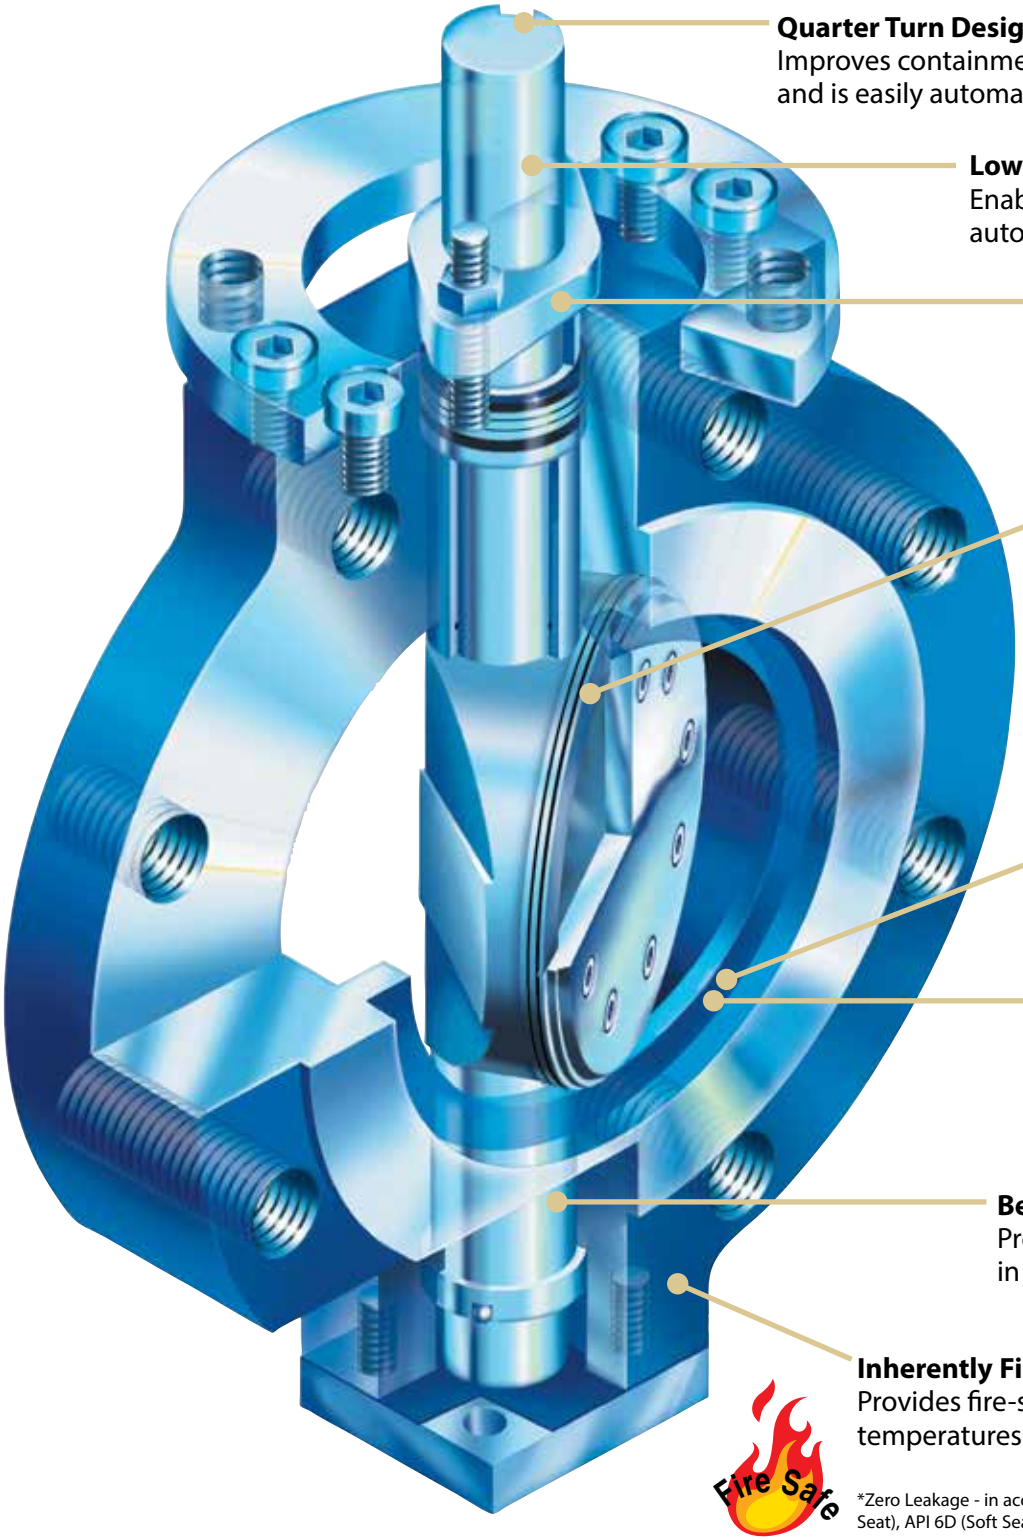

Quarter Turn Design
Improves containment integrity and is easily automated

Low Break and Operating Torque
Enables simplified, cost-effective automation

Blowout-Proof Shaft
Complies with API 609 to improve safety for operating personnel

Stainless Steel Graphite Laminated Seal Ring
Provides reliable, zero leakage*, bi-directional shutoff to 550°C (1000°F)

Wide Angle Seat Design
Eliminates wedging and binding of the seat/disc engagement

Optional Stellite Seat
Offers optimal resistance to erosion in abrasive and high velocity applications

Bearing Protector Rings
Prevent solid particles from coming in contact with bearing surfaces

Inherently Fire-safe Design
Provides fire-safe system security at extreme temperatures per API 607 Rev. 4

Fire Safe

*Zero Leakage - in accordance with the following standards: API 598 (Soft Seat), API 6D (Soft Seat), FCI 70-2 Class VI.

FLOWSEAL MS

Product Range

Flowseal MS product range offers three face-to-face dimension options which gives both cost savings and greater flexibility in piping design or retrofit opportunities.

- **Lug Design**
  Flanges acc. to DIN EN 10290-1 / ASME 16.5
  Face to face acc. DIN EN 558-1 series 16 / API 609 table 3 category B / ASME B16.10
  Interchangeable with most butterfly valves

- **Flanged Design - Short Pattern**
  Flanges acc. to DIN EN 10290-1 / ASME 16.5
  Face to face acc. DIN EN 558-1 series 13 / API 609 table 3 category B / ASME B16.10
  Most common face-to-face dimensions for triple-offset rotary valves

Lug Pattern	
EN 558-1	API 609/ ASME B16.10
DN 80 to 600 - PN 10 - 40	3" to 24" - class 150/300
DN 80 to 400 - PN 63 - 100	3" to 16" - class 600
DIN EN 10920-1	ASME B16.5

Other sizes available upon request.

Flanged Design Short Pattern	
EN 558-1	API 609/ ASME B16.10
DN 80 to 600 - PN 10 - 40	3" to 24" - class 150/300
DN 80 to 400 - PN 63 - 100	3" to 16" - class 600
DIN EN 10920-1	ASME B16.5

Other sizes available upon request.

Product Standards & Cryogenic Valves

Design:	EN593 ASME B16.34 ASME SEC VIII ASME B31.1 and B31.3 API 609
Face to Face Dimensions:	EN558-1 Series 16 EN558-1 Series 13 API 609 ASME B16.10
Flange Dimensions:	EN / DIN Std. acc. EN1092-1 ASME B16.5 ISO 7005
Testing:	DIN 3230 leakage rate 1BS 6755 leakage rate AAPI 598ANSI/ FCI 70-2 class VI
Fire Testing:	API 607 Rev. 4
Marking:	MSS SP-25 EN19
Quality Assurance:	ISO 9001 PED
TA- Luft Certificate:	Assessment of the equivalence of the spindle seal by means of packing gland against a bellow-type sealing and downstream safety

Cryogenic (Low Temperature) Valves

- For fluid temperatures below -60°C to -120°C (-76°F to -184°F)
- Body stainless steel
- Disc stainless steel
- Shaft AISI Type 660 SS/1.4980
- Low temperature extension:
  - Prevents ice from forming at the top of the shaft
  - Isolates and insulates the stuffing box
- Length of the extension:

DN	80	100	125	150	200	250	300	350	400	450	500	600
H (mm)	250	300	300	300	300	300	350	450	450	450	450	450

NPS	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
H (inch)	3	3	3	3	4	4	4	5	6	6	6	7

Maximum: -120°C (-184°F) at max. 25% of nominal pressure.

FLOWSEAL MS

Crane ChemPharma & Energy

Crane Energy Global Headquarters
4526 Research Forest Drive, Suite 400
The Woodlands, Texas 77381 U.S.A.
Tel.: +1 936-271-6500
Fax.: +1 936-271-6510

Flowseal MS Customer Service
Marburger Straße 364
57223 Kreuztal, Germany
Tel.: +49 2732/520-00
Fax.: +49 2732/520-100

www.cranecpe.com

CRANE

FLOW OF FLUIDS
www.flowoffluids.com

ALOYCO · CENTER LINE · COMPAC-NOZ · CRANE · DEPA

ELRO · DUO-CHEK · FLOWSEAL · JENKINS (SINCE 1864) · KROMBACH ARMATUREN

NOZ-CHEK · PACIFIC VALVES · RESISTOFLEX · revo · Saunders (the science inside)

STOCKHAM · Triangle · UNI-CHEK · WTA · XOMOX

CPE-FLOWSEAL MS-BU-EN-A4-2014_06_30