



Electrical connection

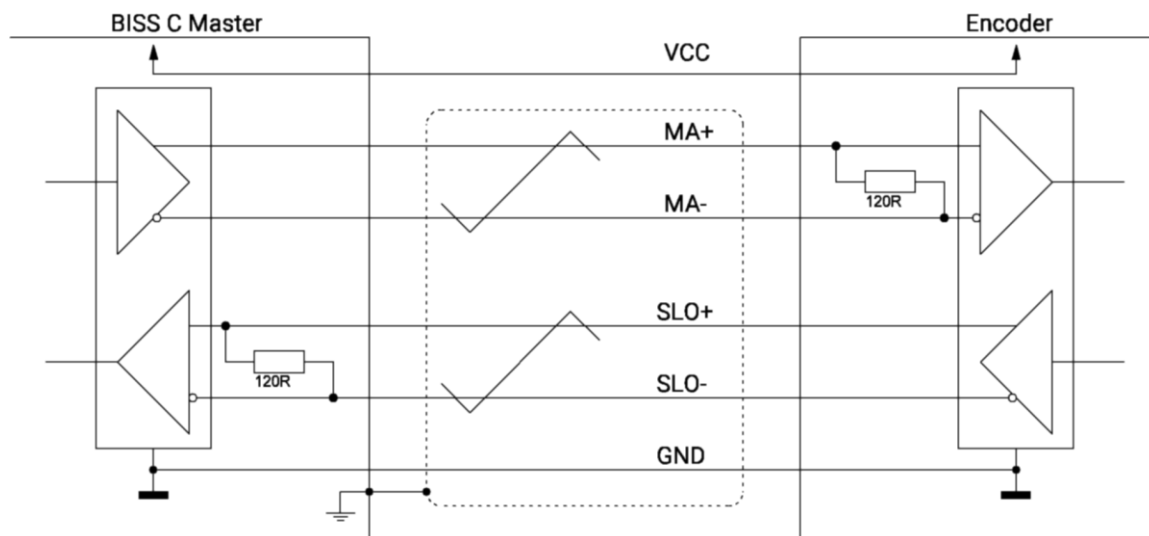

The MA and SLO signals are 5 V RS422 compatible differential pairs with termination resistor inside the encoder.

Cable Connection

Pin	Wire	Color
1	Vcc	Red
2	GND	Black
3	MA+	Yellow
4	MA-	Green
5	SLO+	Blue
6	SLO-	White

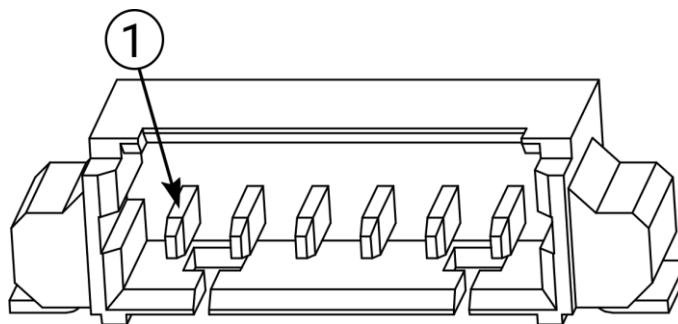

6-pin Molex Picoblade or Amphenol 10114830 plug