Deterministic DDIM reuses clean conditioning at every denoiser call

eta = 0; sampler variation comes from the initial noise

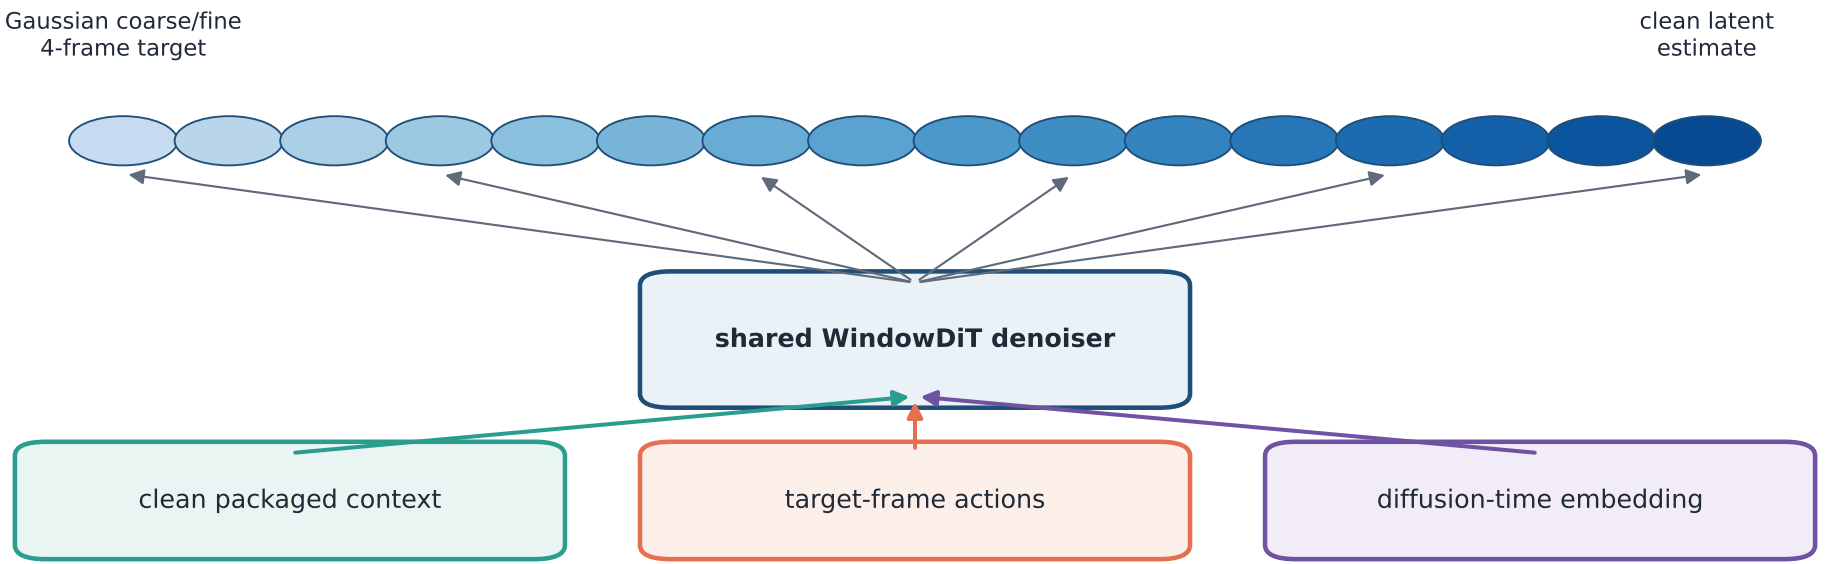

16 NFE per four-frame block = 4 NFE/frame; 38 rollout blocks = 608 NFE.