

 博汇纸业 BOHUI PAPER	江苏博汇纸业有限公司 Jiangsu Bohui Paper Industry Co., Ltd			Effective Date	2024-09-18
				Version	JSBHP-DT02-005 8.0


SUPER BULK GC1
IBH



Items		Unit	Test Method	Tolerance	Standard										
Grammage		g/m ²	ISO536	± 3%	190	205	215	245	255	270	290	305	330	345	375
Thickness		μm	ISO534	± 3%	265	310	340	400	418	445	478	490	530	555	590
Taber Stiffness	MD	mN • m	ISO2493	± 15%	4.8	7.0	8.0	13.0	15.0	17.0	20.0	23.0	26.0	28.5	38.5
	CD	mN • m		± 15%	2.4	3.2	4.0	6.0	7.0	7.8	9.0	11.0	13.0	15.0	18.5
Moisture		%	ISO287	± 1.5	7.0			7.5							
Surface Roughness PPS 10		μm	ISO8791-4	≤	1.6										
Brightness (D65/10)	Top	%	ISO2470-2	± 3	89.0										
	BACK				87.0										
75° Gloss		%	ISO8254	≥	45										
CD Folding Strength		Times	ISO5626	≥	15										
IGT Picking		m/s	ISO3783	≥	1.3										
Ply Bond		J/m ²	TAPPI569	≥	130										
Cobb (60s)		g/m ²	ISO535	≤	60										

Testing Condition:

Temperature: (23±1) °C/ Relative Humidity: (50±2) %

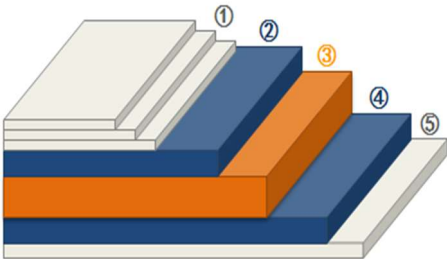

- ① Topside: triple times blade coating
- ② Top Layer: LBKP+NBKP
- ③ Middle Layer: BCTMP+NBKP
- ④ Bottom Layer: LBKP+NBKP
- ⑤ Backside: one time blade coating

Product Characteristics:

Super high bulk, general box packaging purpose, high Stiffness, good flatness, Lightweight, can be fit for high-speed offset.