



CSM V3 -- HMI Module 10 -- Display Tilt Lock V1.0

2-piece friction tilt: BASE bolts to beam, ARM bolts to touchscreen frame

BASE Iso (mounts to beam)

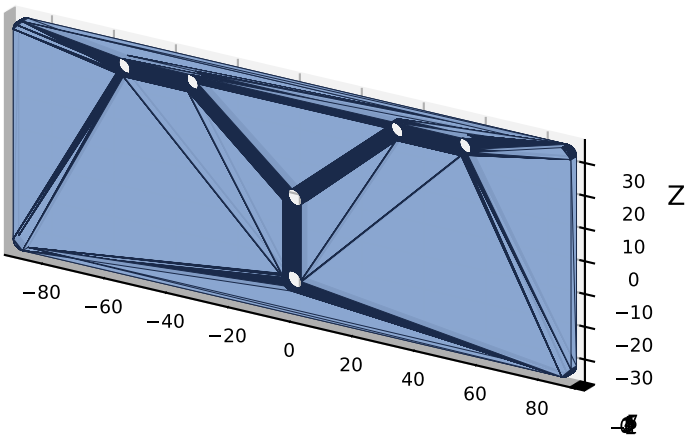


BASE Front -- pivot + lock inserts

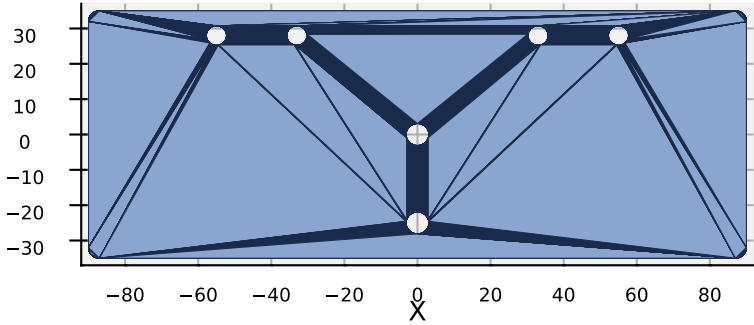


PART	Display Tilt Lock
NUMBER	M10-P06
VERSION	V1.1 (RC1)
MODULE	10 -- HMI
QTY	1 Base + 1 Arm
MATERIAL	PETG (PA12 prod)
INFILL	100%, 4 walls
LAYER	0.2 mm
MASS	~79 g each
PRINT	flat, ~1.5 h each
DIMENSIONS (mm)	
Each plate	180 x 5 x 70
Corner fillet	R3
Beam bolts	4x M5 thru (Base)
Frame inserts	4x M5 heat-set (Arm)
Pivot	M5 insert (Base)/thru (Arm)
Lock screw	M5 insert (Base)
Lock arc slot	TRUE arc, R25 +/- 3 mm
Tilt range	+/-20 deg (40 deg total)

ARM Iso (mounts to frame)

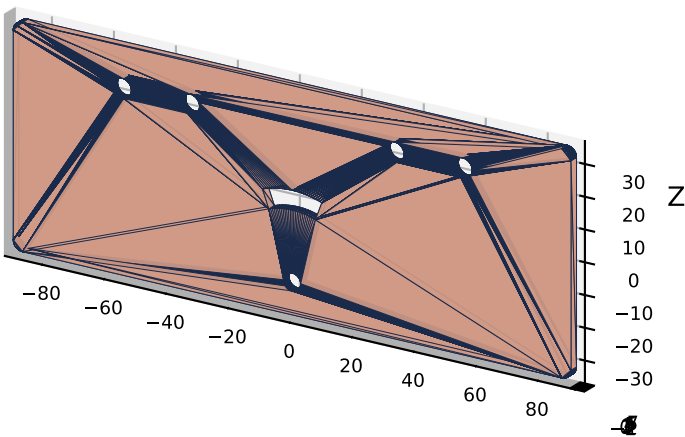

ARM Front -- frame inserts + lock arc-slot

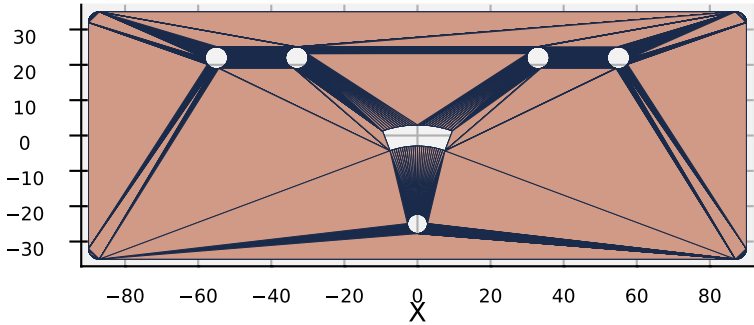

ASSEMBLY

- Print both PETG 100%, 4 walls.
BASE: operator face down
ARM: frame face down
- Heat 6x M5 inserts (B0DPQJ4W3Z):
BASE: pivot + lock (2)
ARM: 4 frame-mount inserts
- Bolt BASE to beam (4x M5 x 20)
- Stack ARM on BASE; M5 x 16 thumb screw through ARM pivot into BASE
- M5 x 16 thumb screw through ARM lock slot into BASE lock insert
- Bolt Touchscreen Frame to ARM (frame existing M5 x 12 bolts)
- Adjust: loosen lock thumb screw, tilt, retighten. Friction holds.

V2.0 PLAN: toothed indexing 10 deg + friction boss around the pivot (eliminates slip)

WALL CHECK: all 7 OK, min 3.25 mm