



CSM V3 -- HMI Module 10 -- Rear Cable Cover V1.0

Cosmetic strip covering the beam rear cable channel * adhesive-mounted

Isometric View

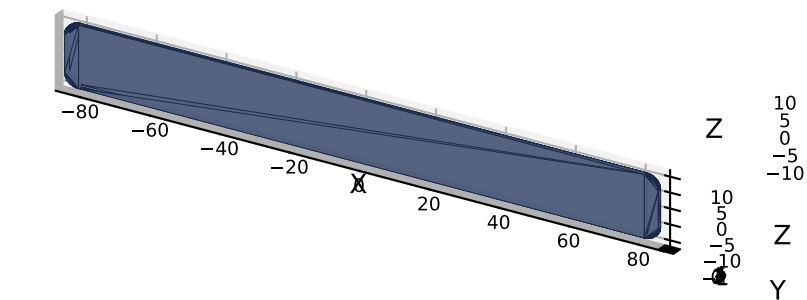


Front View (operator side, chamfered)




PART	Rear Cable Cover
NUMBER	M10-P07
VERSION	V1.0 (DRAFT)
MODULE	10 -- HMI
QTY	1
MATERIAL	PETG (PA12 prod)
INFILL	100%, 4 walls
LAYER	0.2 mm
MASS	~13 g
PRINT	flat, ~30 min
DIMENSIONS (mm)	
Cover	170 x 3 x 20
Corner fillet	R4
Edge bevel	0.6 mm chamfer (front)
Beam cable ch	8 x 4 mm (covered)
Beam length	178 mm (4 mm margin/end)
Mounts via	3M VHB double-sided tape

Back View (adhesive face)

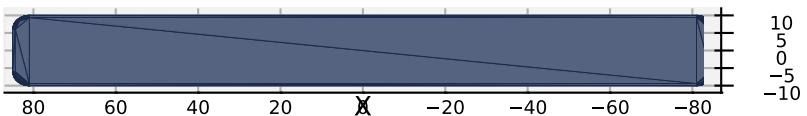

End View -- 3 mm thick

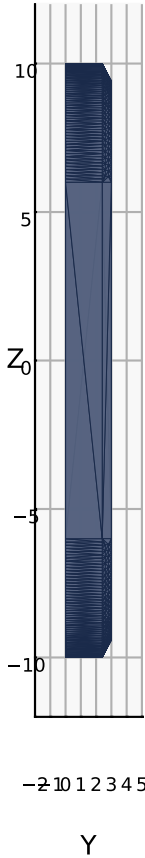

ASSEMBLY

1. Print PETG flat (front face down for clean visible chamfered surface)
2. Complete all HMI cable routing FIRST: HDMI + USB-C + fan power + LED leads tucked into the beam rear cable channel
3. Apply ~15 mm wide 3M VHB double-sided foam tape to the cover BACK face
4. Peel release liner, align over the cable channel on beam REAR face, press firmly 10-15 seconds
5. Service: pry corner with thin spudger to remove; clean VHB residue with IPA

V1.1 PLAN: tongue + detent snap mount
once first install reveals cable layout in the channel

INSTALL ORDER:
ALL cable routing first -> tape -> cover
(cannot easily add cables under cover once adhered)