



CSM V3 -- HMI Module 10 -- Cable Clamp V1.0

Saddle plate for routing HDMI + USB-C + fan power along the 2020 mast

Isometric View

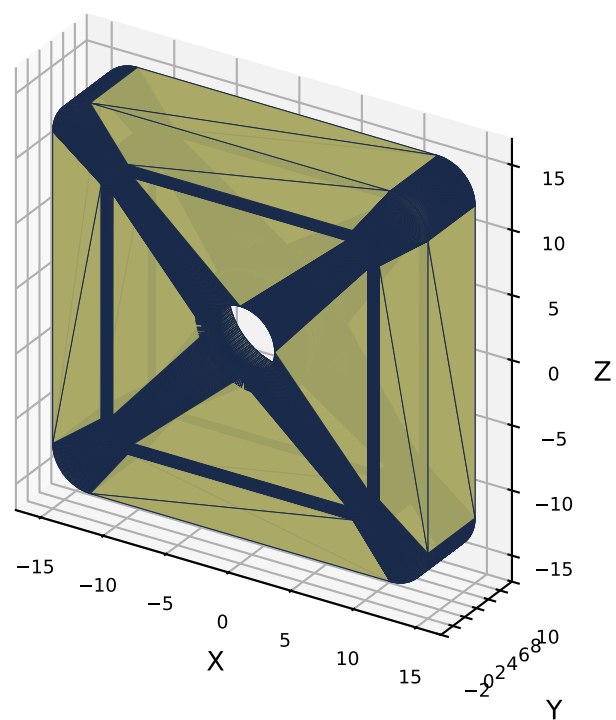


Front View (+Y, away from mast)

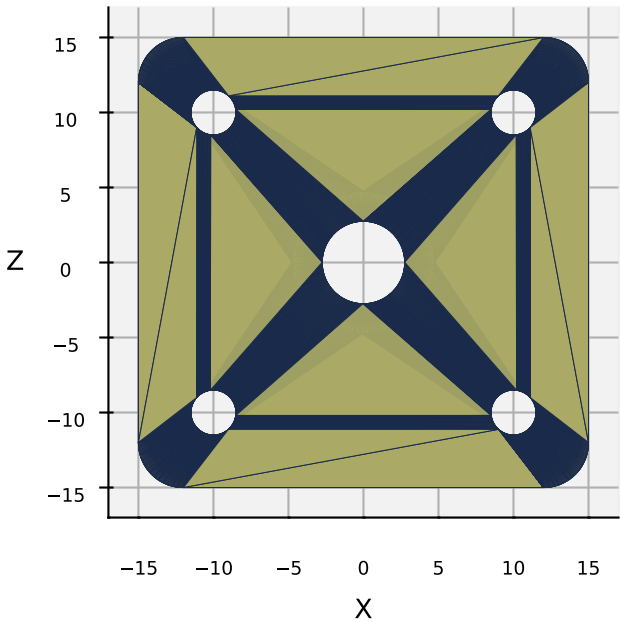


PART	Cable Clamp
NUMBER	M10-P08
VERSION	V1.0 (DRAFT)
MODULE	10 -- HMI
QTY	2 (base + mid)
MATERIAL	PETG (PA12 prod)
INFILL	100%, 4 walls
LAYER	0.2 mm
MASS	~8.2 g each
PRINT	flat, ~20 min
DIMENSIONS (mm)	
Plate	30 x 8 x 30
Corner fillet	R3
Mount bolt	1x M5 + CB 9.5 x 5.5
Zip-tie holes	4x D3 at (+/-10, +/-10)
Cable bundle	10-14 mm dia
Mounts to	2020 mast slot (T-nut)

Back View (-Y, against mast)

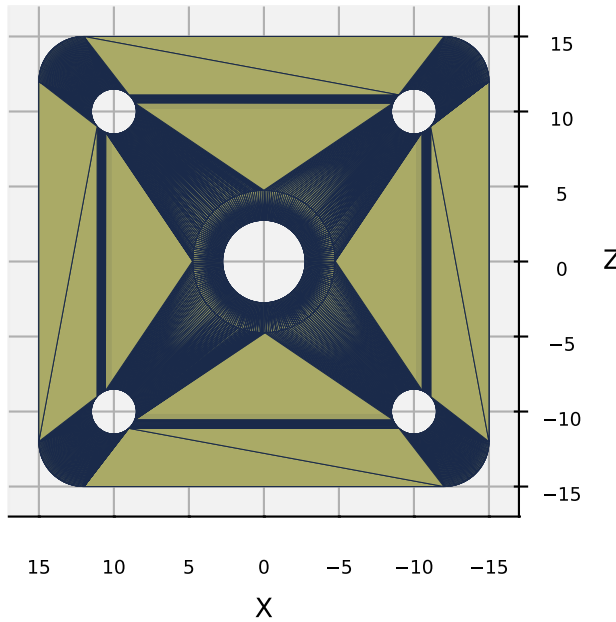

Side View -- 8 mm thickness

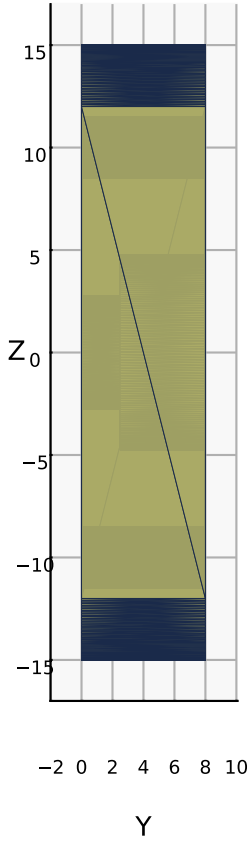

ASSEMBLY (per clamp)

1. Print PETG flat (mast face down)
2. Slide M5 T-nut into 2020 mast slot
3. Bolt clamp to mast (M5 x 12 cap head)
4. Route HDMI + USB-C + fan power along mast beside the clamp
5. Zip-tie diagonally through corner holes around cables; tighten on +Y side
6. Repeat second diagonal if needed

RECOMMENDED PLACEMENT:

- Clamp 1: just above wood base
- Clamp 2: mid-height (Z ~ 100 mm)

WALL CHECK: all 6 OK, min 2.5 mm