




Mean Well S-250-24 PSU

ASIN: B07Y7L664K

24V DC, 10A (240W), AC input switchable 115/230V

199 × 110 × 50 mm | mass ~960 g | 4× M4 chassis

<https://www.amazon.com/dp/B07Y7L664K>

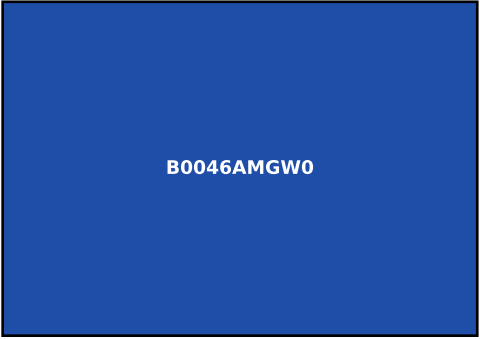

Arduino Mega 2560 REV3

ASIN: B0046AMGW0

Real-time controller. Mega <-> Pi via UART/USB 115200 baud.

102 × 54 mm | 4× M3 mounting | USB-B port

<https://www.amazon.com/dp/B0046AMGW0>



Raspberry Pi 4 4GB Starter

ASIN: B07V5JTMV9

Touchscreen UI + pattern logic. Higher CPU layer. Lives on touchscreen mast, NOT wood base.

85 × 56 mm | 4× M2.5 mounting | HDMI + USB-C

<https://www.amazon.com/dp/B07V5JTMV9>



TB6600 Stepper Driver 4A

ASIN: B08SG7L54W

Drives NEMA 23 (2.8A < 4A rating). Microstep + current via DIP.

96 × 56 × 37 mm | 2× M3 flange | screw terminals

<https://www.amazon.com/dp/B08SG7L54W>




RioRand LM2596 DC-DC Buck

ASIN: B008BHB4L8

Adjustable 24V -> 5V. TWO units required: #1 for Mega+servos, #2 for Pi (isolated rail).

43 × 21 mm | 2× M3 corner holes | adj trimpot

<https://www.amazon.com/dp/B008BHB4L8>

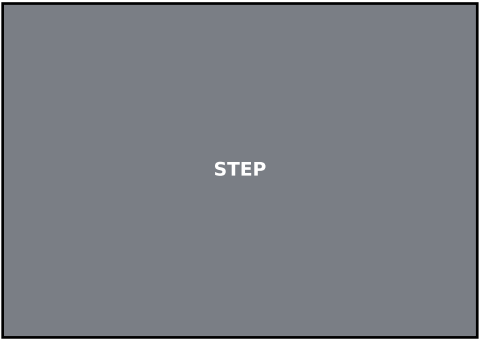

NEMA 23 + 5:1 HG5 Gearbox

ASIN: (StepperOnline)

Drive motor. Body 57×57×56 + 50 mm gearbox = 106 mm tower.

57 × 57 footprint | M5 PCD 47.14 flange holes | shaft 14 mm

*(supplier StepperOnline 23HS22-2804S-HG5)*