



CSM V3 -- HMI Module 10 -- Expansion Plate V1.0

Generic accessory mounting plate with 5x3 M3 grid

Isometric View

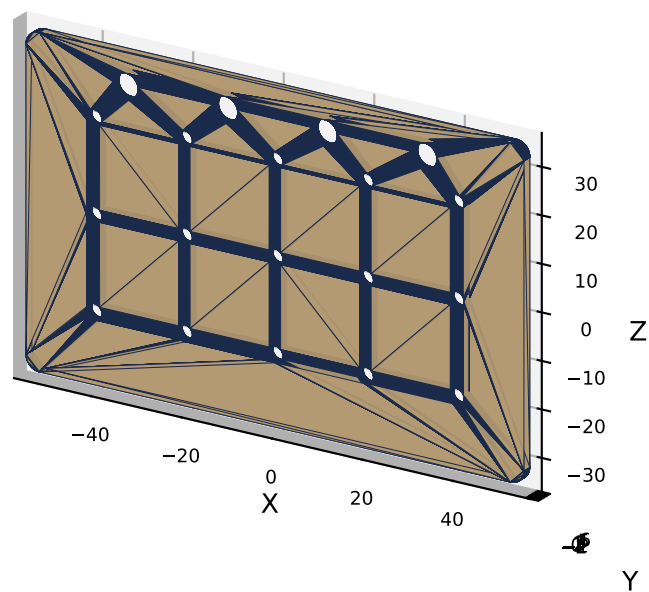


Front View (operator side)

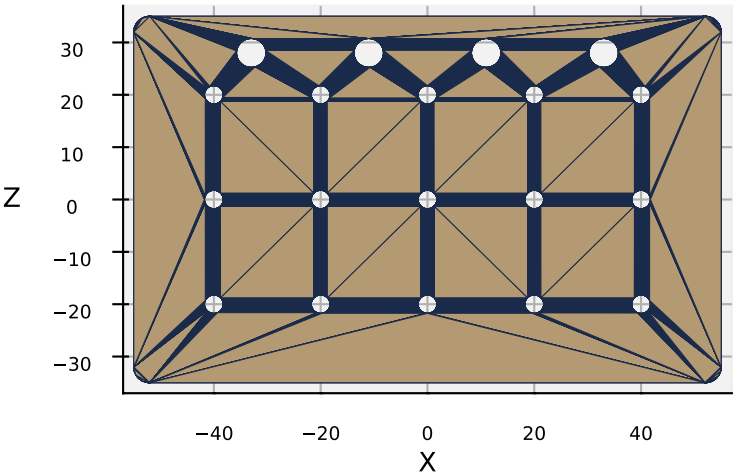


PART	Expansion Plate
NUMBER	M10-P10
VERSION	V1.0 (DRAFT)
MODULE	10 -- HMI
QTY	1
MATERIAL	PETG (PA12 prod)
INFILL	100%, 4 walls
LAYER	0.2 mm
MASS	~38 g
PRINT	flat, ~1.5 h
DIMENSIONS (mm)	
Plate	110 x 4 x 70
Corner fillet	R3
Beam bolts	4x M5 at +/-11, +/-33
Beam bolt Z	+28 (top strip)
M3 grid	5 cols x 3 rows
Grid pitch	20 x 20 mm
Grid holes	15x M3 clearance

Back View (against beam)

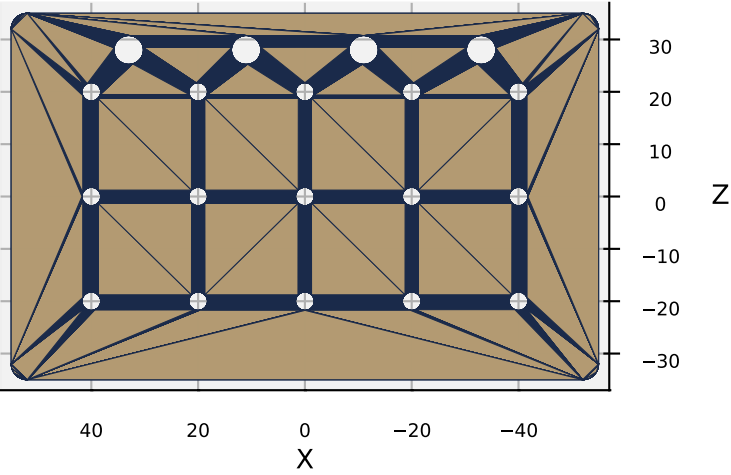

Side View (4 mm thick)



ASSEMBLY

1. Print PETG flat, 100% infill, 4 walls
2. Bolt to beam FRONT-face inserts at INNER 4 positions (X = +/-11, +/-33). Use M5 x 12 socket-head cap screws. OUTER 2 inserts (X = +/-55) remain free for Touchscreen Frame.
3. Mount accessory PCB or hardware to whichever M3 holes match its pattern. 20 mm pitch accommodates 20, 40, 60, 80, 100 mm spans.
4. Plate can stay installed even without an accessory -- forms a structural panel and is ready when one is added.

ACCESSORY IDEAS:

- * Status LED strip + driver
- * Microphone PCB (voice cmd, Phase 2+)
- * Small OLED label display
- * Camera mount
- * Motion sensor (PIR)

WALL CHECK: all 5 OK