



Retained B7, fresh canonical schematic: FS, 1.8 V, -40 C, 50 ps; 11 -> 00
17.4 fF per WL; Gear 1 ps, CHGTOL=1e-18 C. Pre-layout experiment.


Regenerated literals settle during precharge

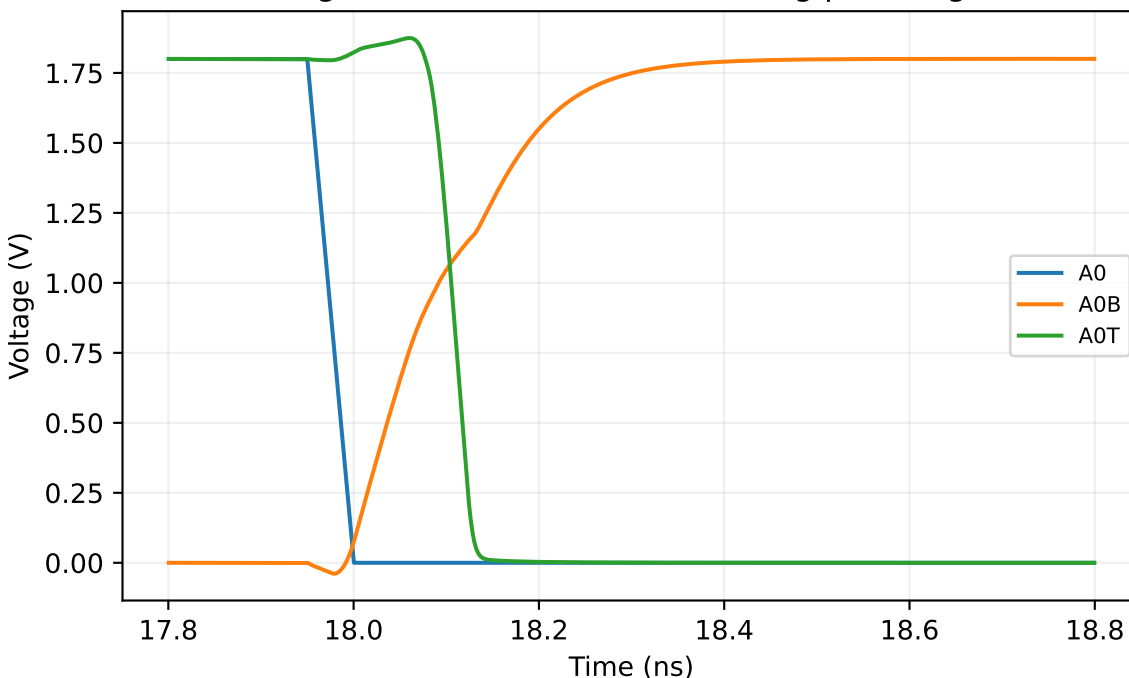

Second evaluation: row 00 discharges

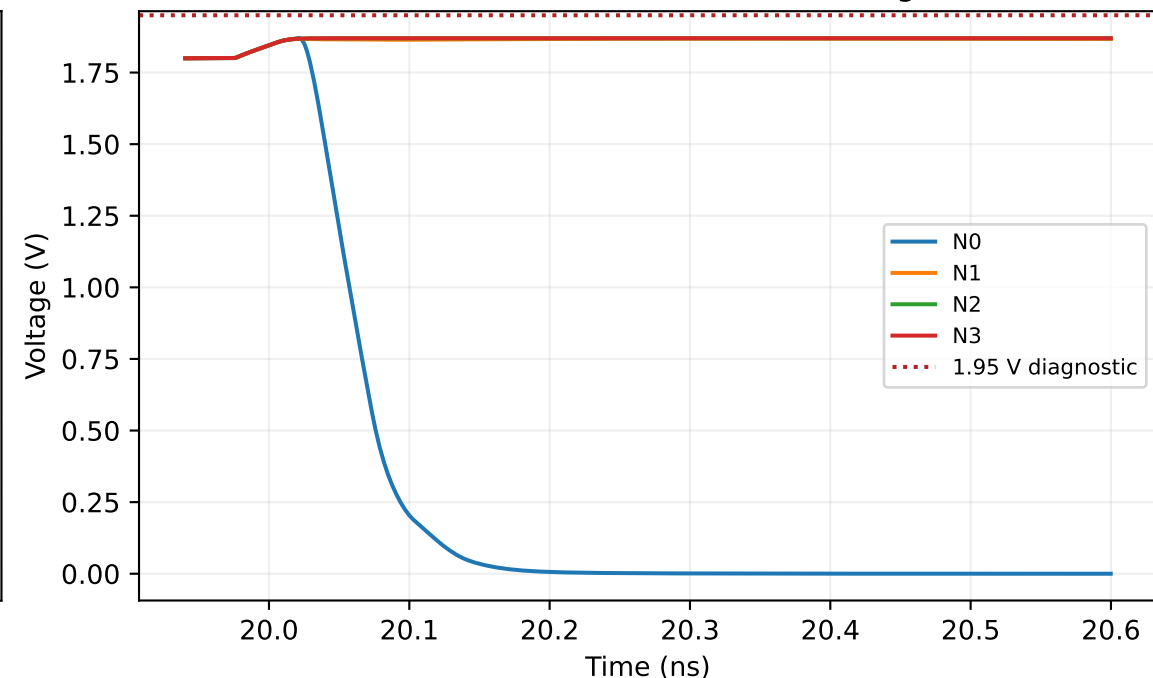

Selected row and unselected WL reference

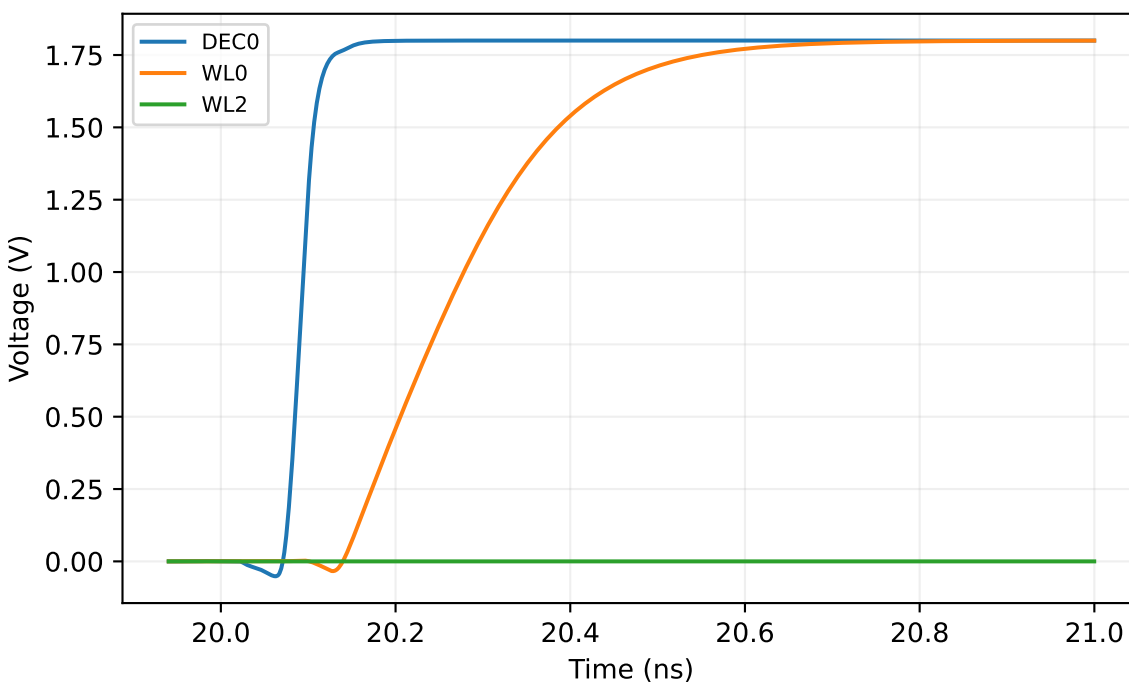

Priming row 11: unchanged WL buffer peak 1.924359 V

