



Dynamic 2-to-4 decoder — measured pre-layout comparisons
Coarse B6 grids; refined candidate diagnostics. No signed-domain/reliability or Fmax clearance.


B6: arrival grid, 12 ordered changes per point

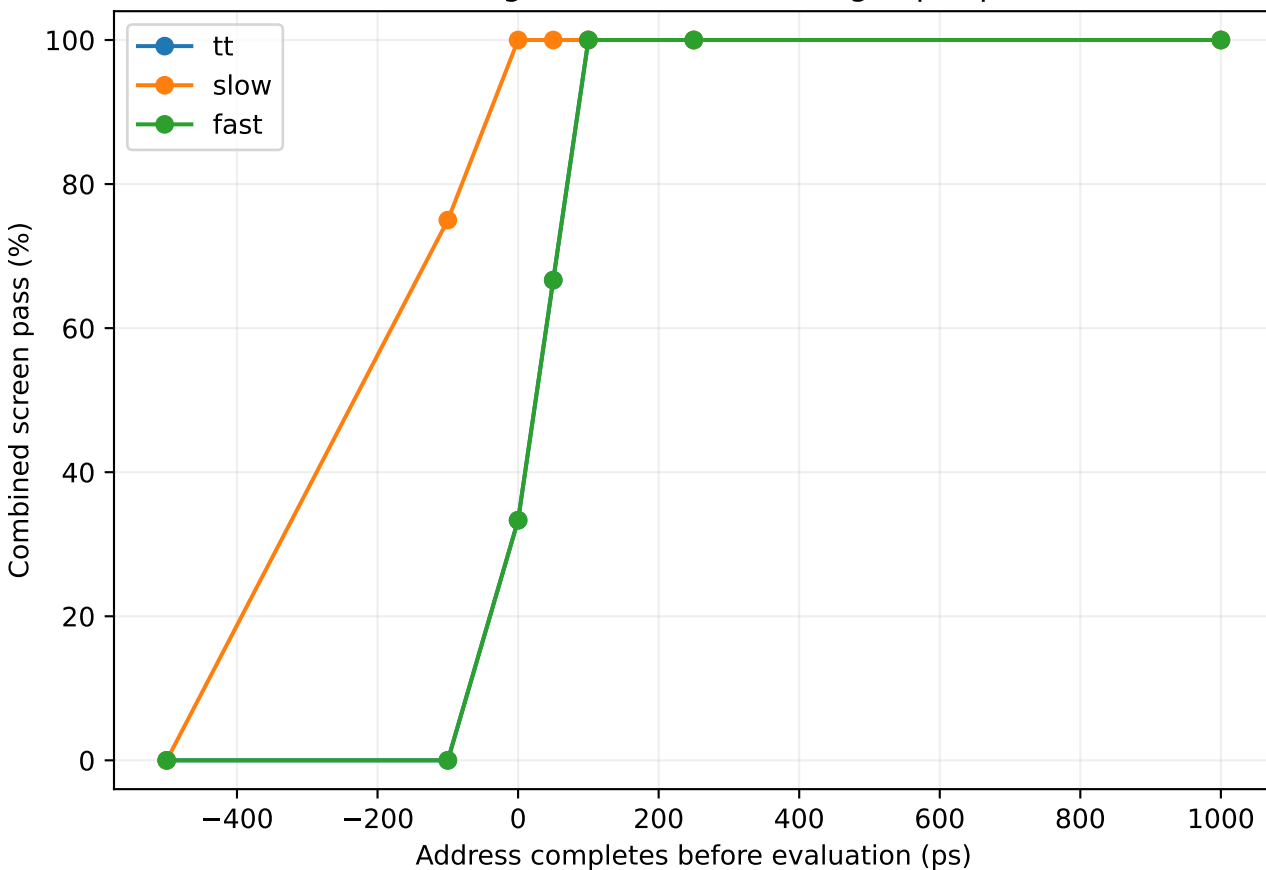

B6: phase grid, four repeated addresses

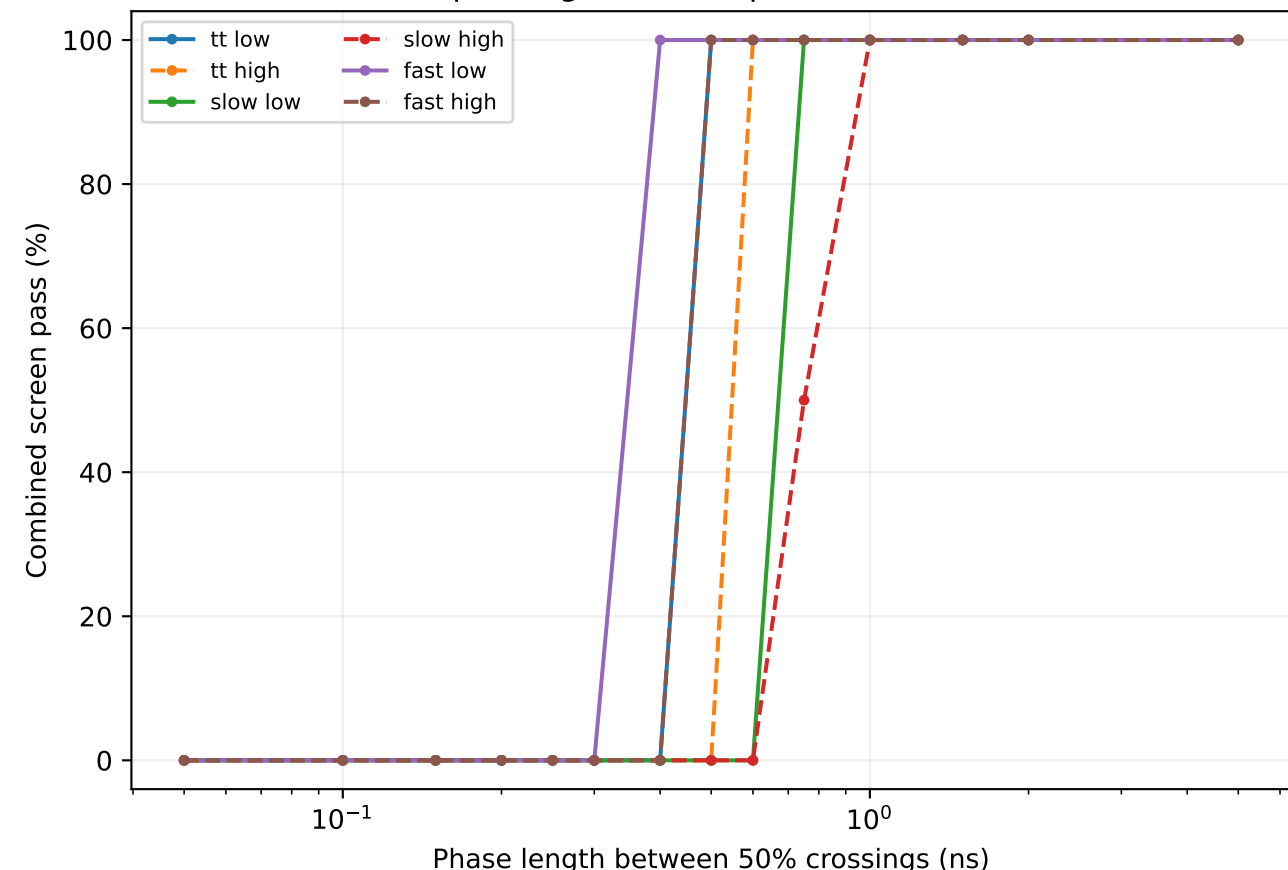

B6: both injected nodes, finite perturbation experiment

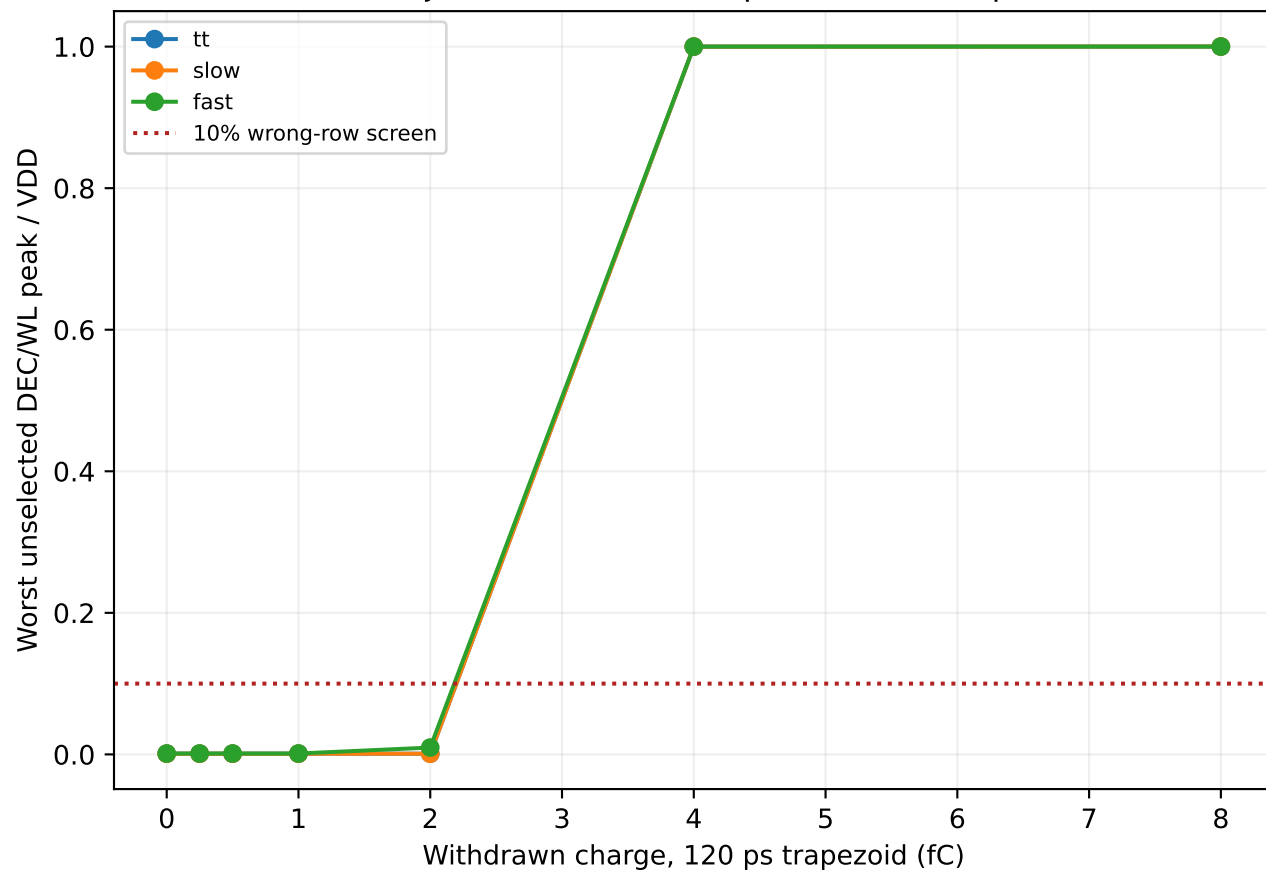

Refined candidate screens: differing declared case sets

