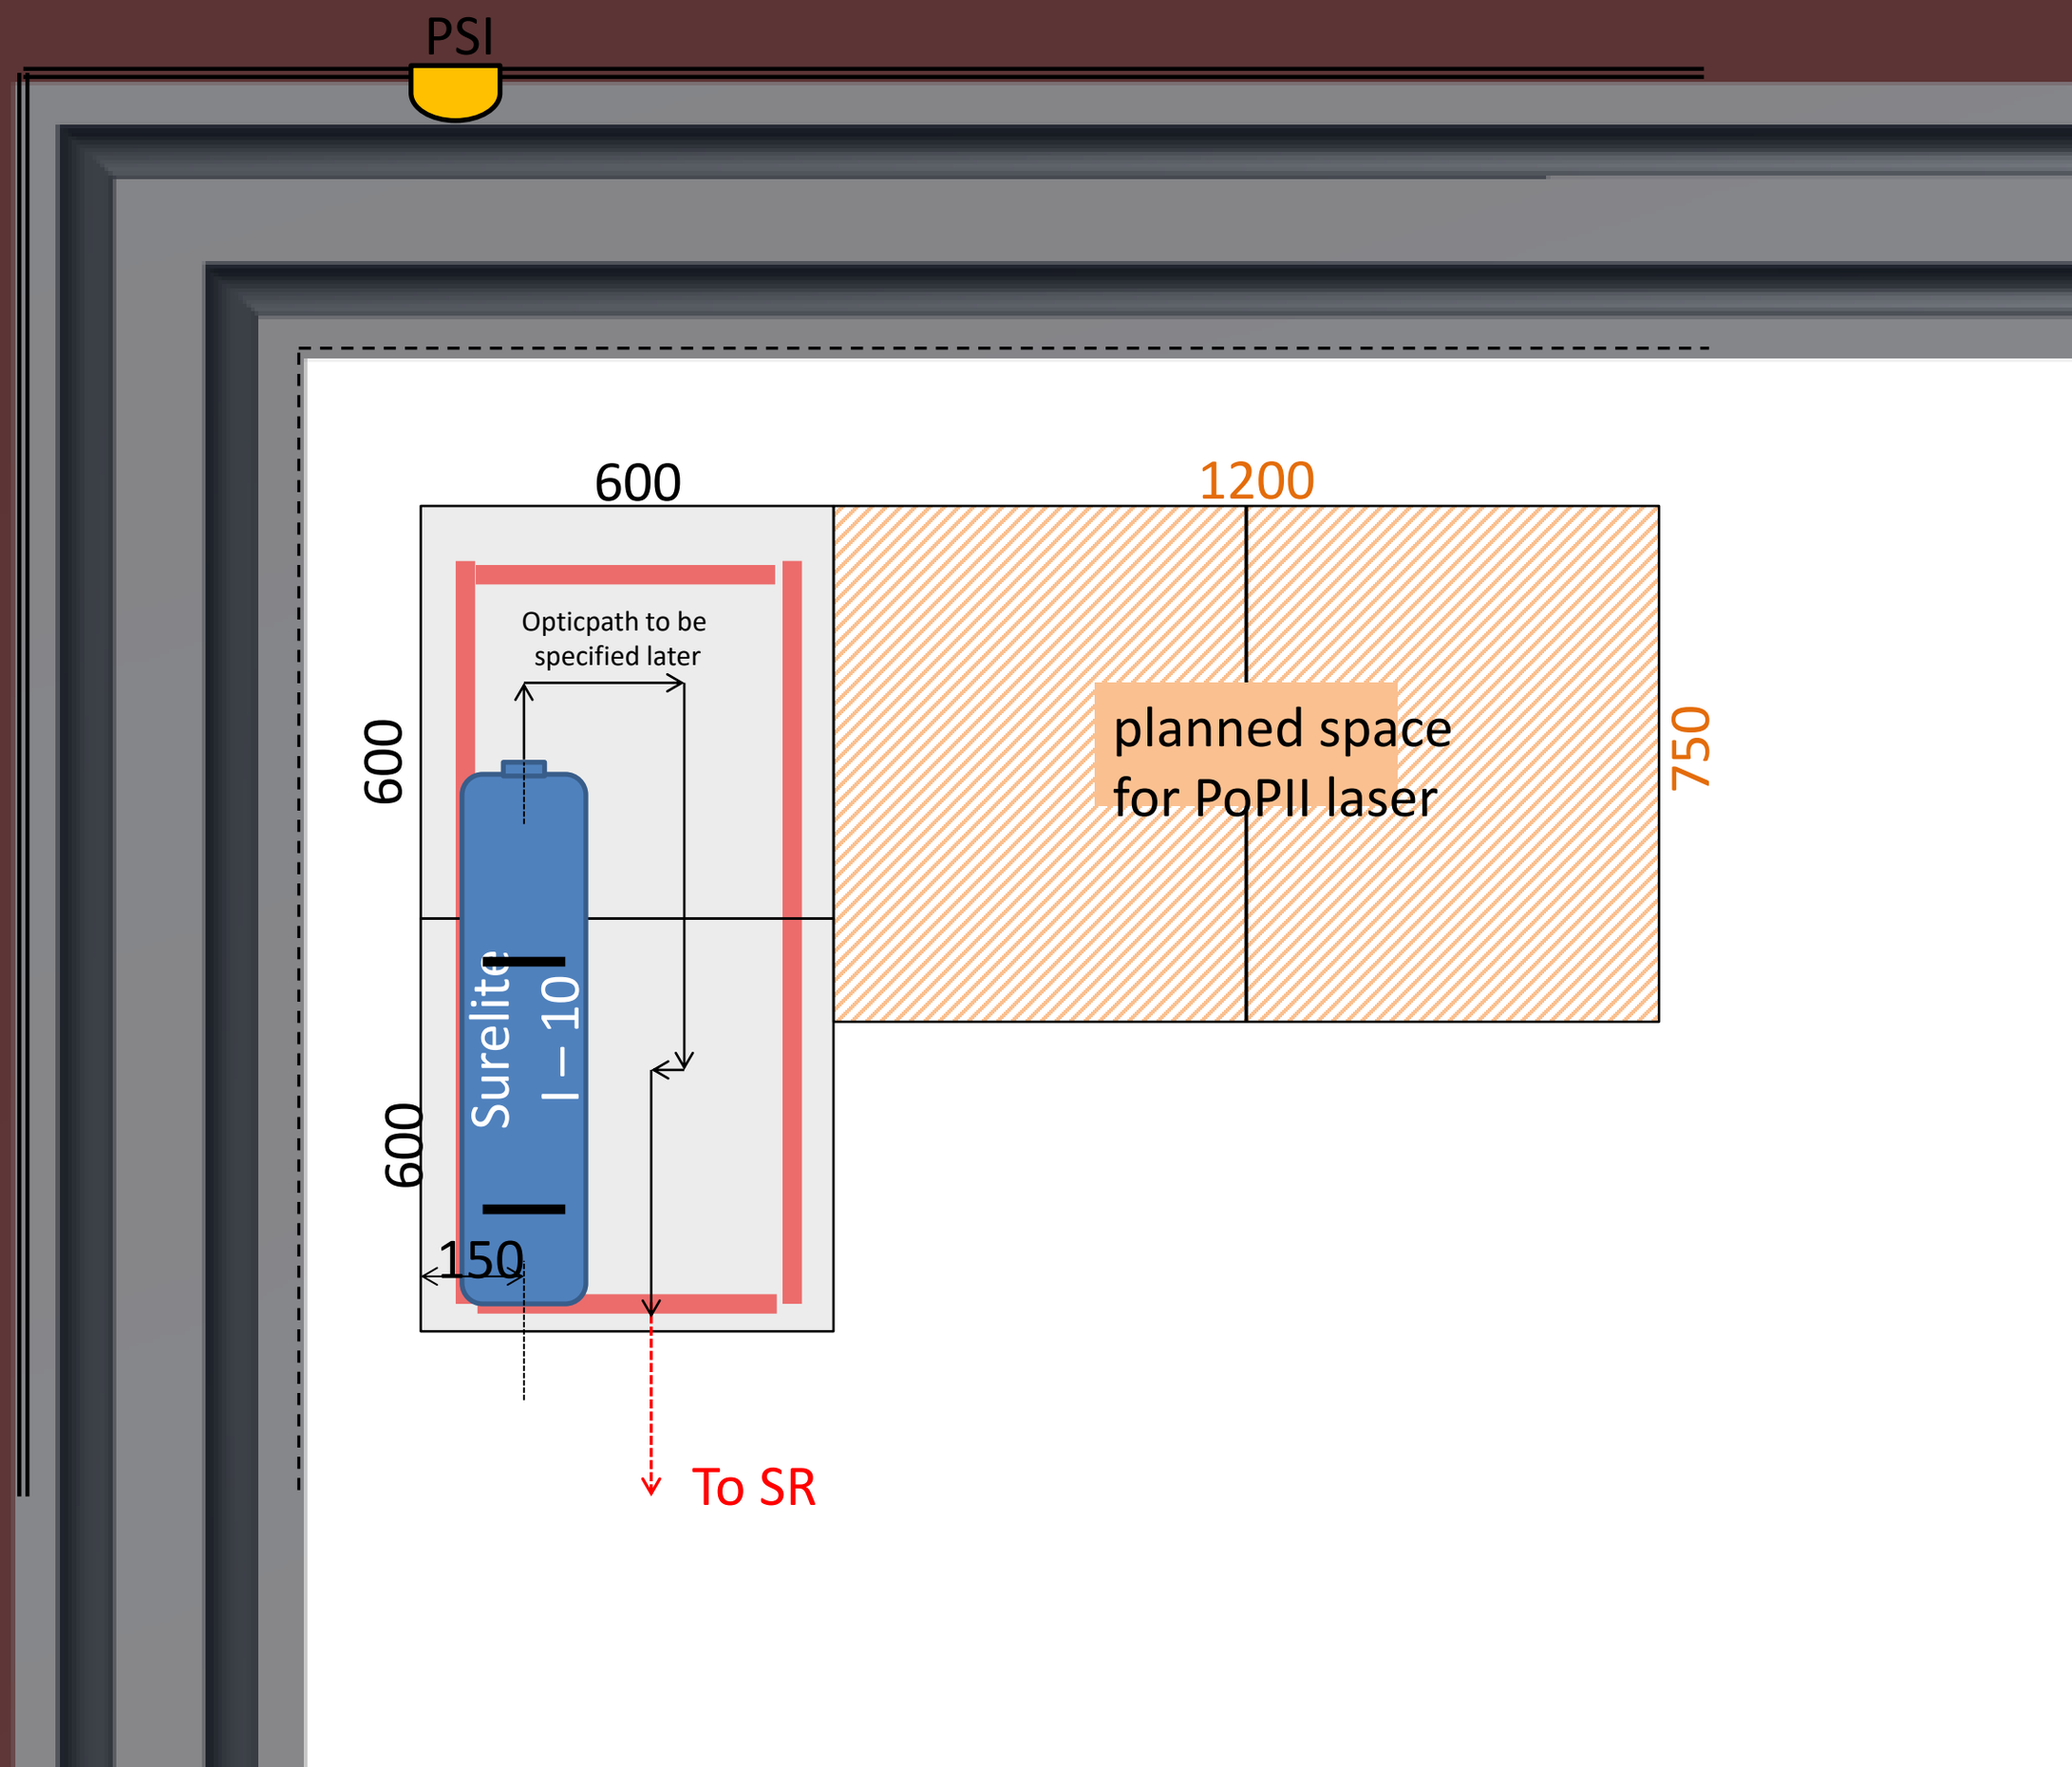
PSI
600
1200
Opticpath to be
specified later
planned space
for PoPII laser
750
600
600
Surelite
I – 10
150
To SR

Laserbeamlevel above opticsboard (designvalue) : 130 mm

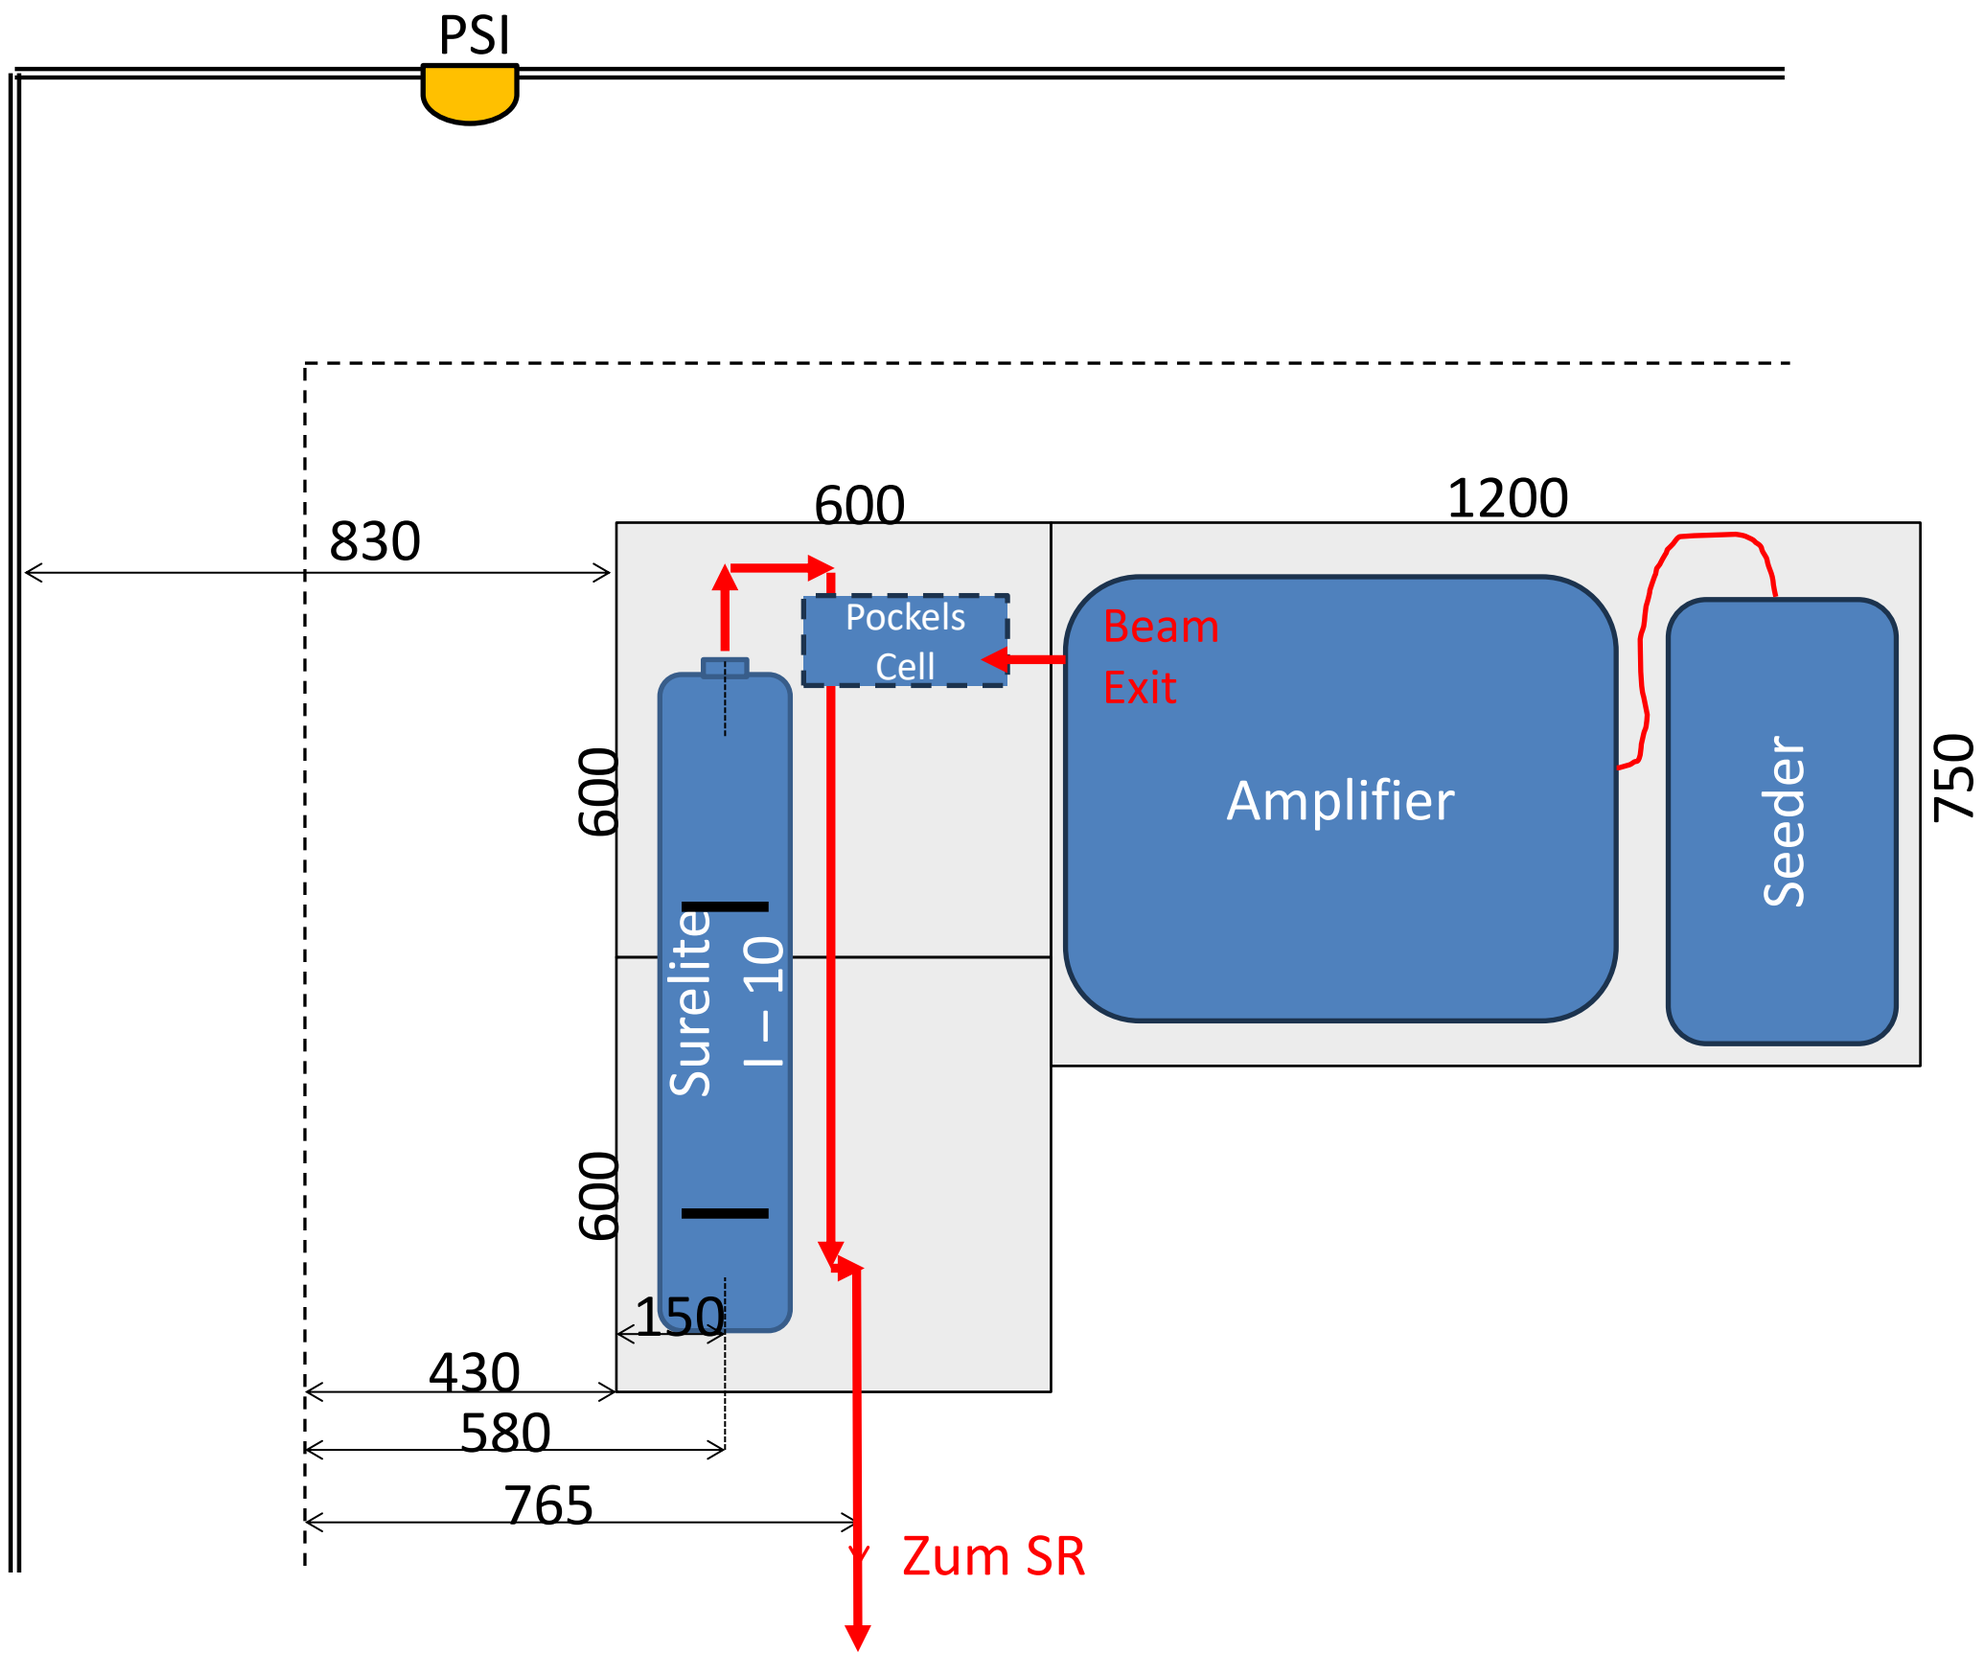

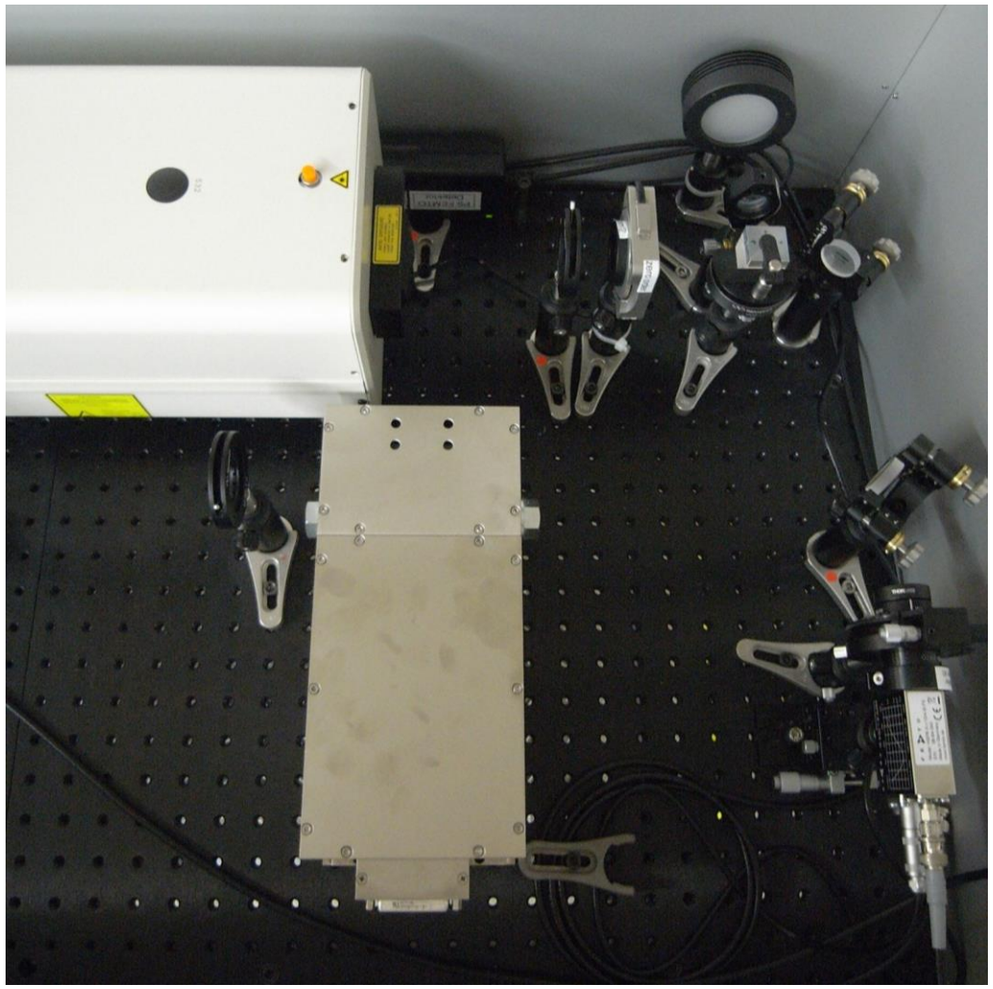

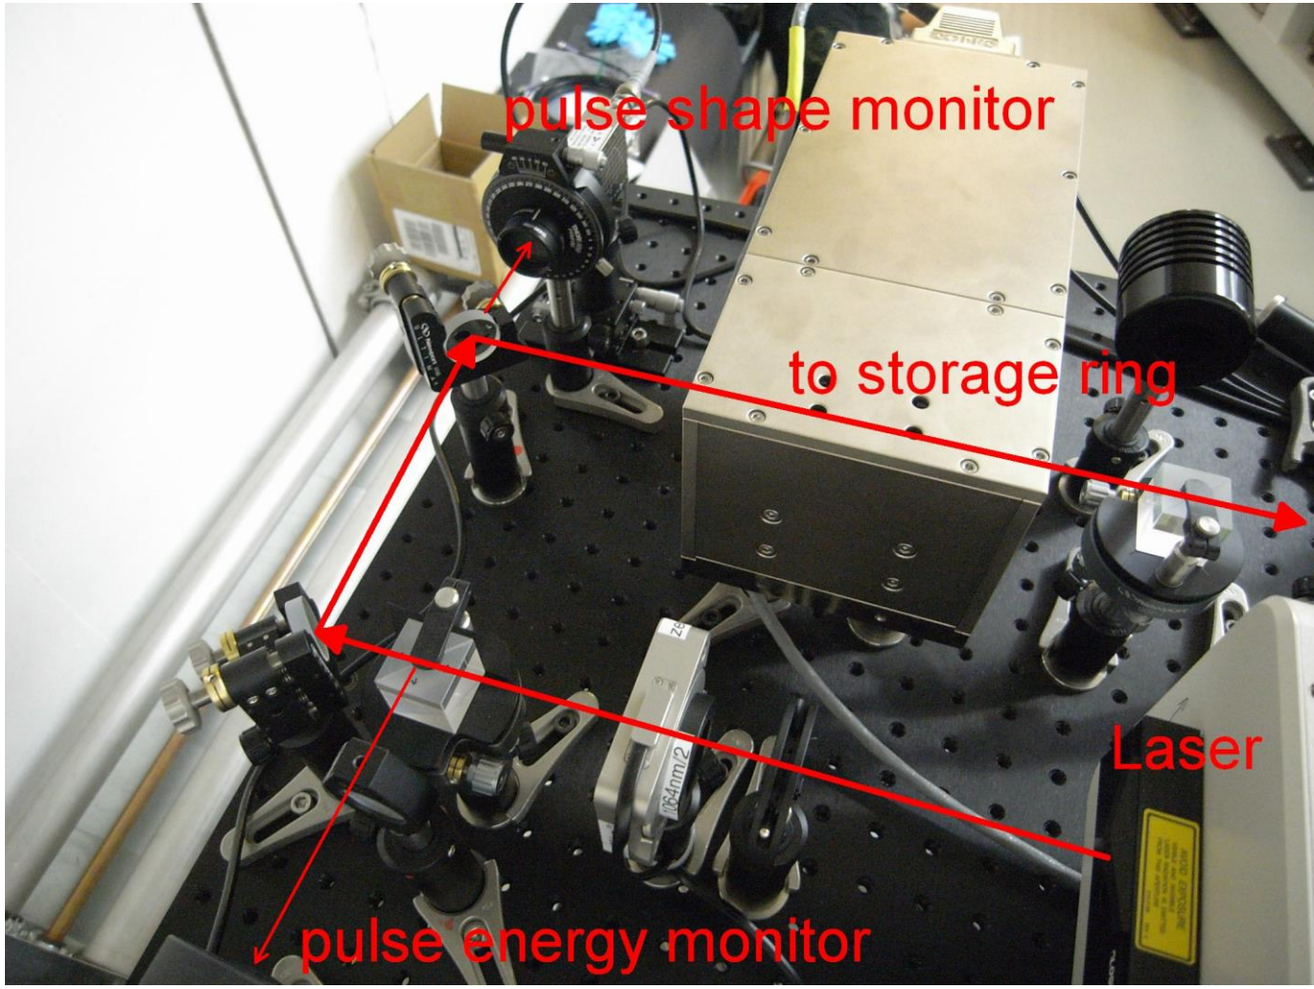
pulse shape monitor
to storage ring
Laser
pulse energy monitor

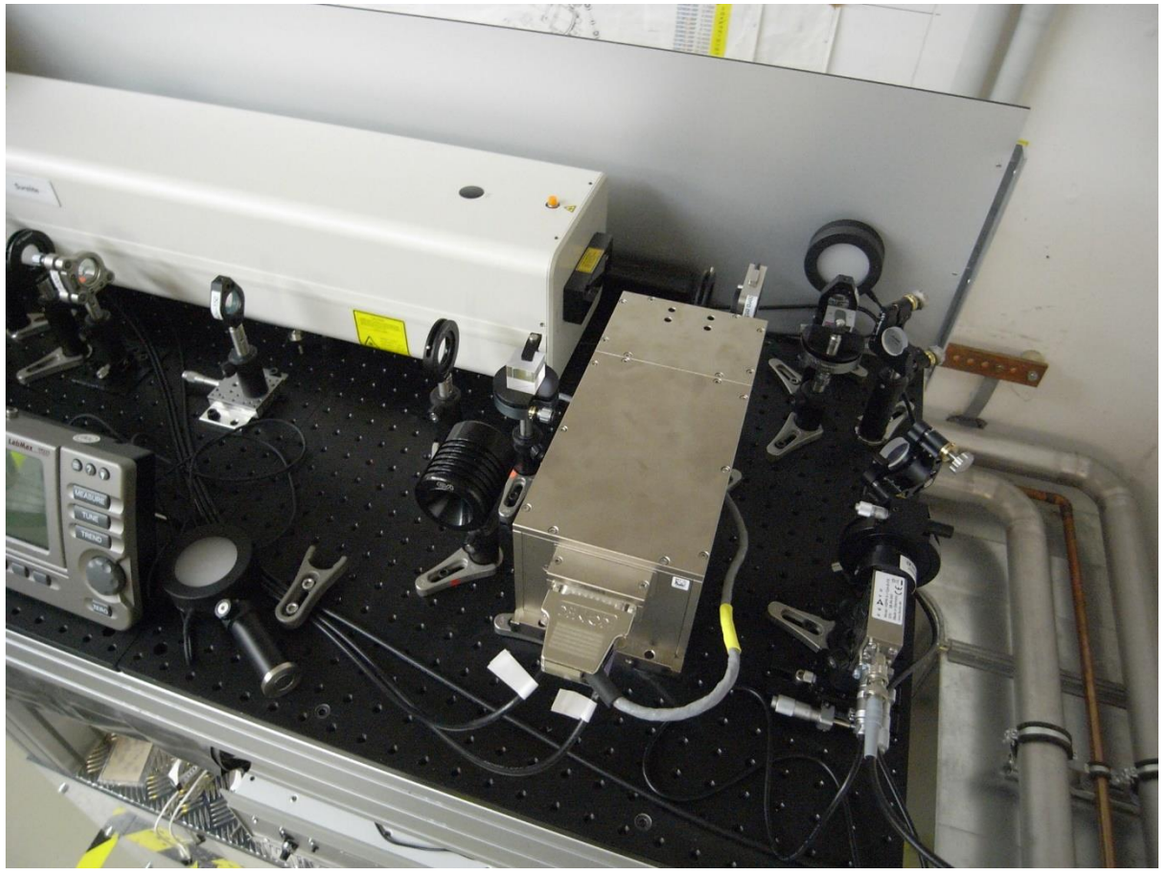

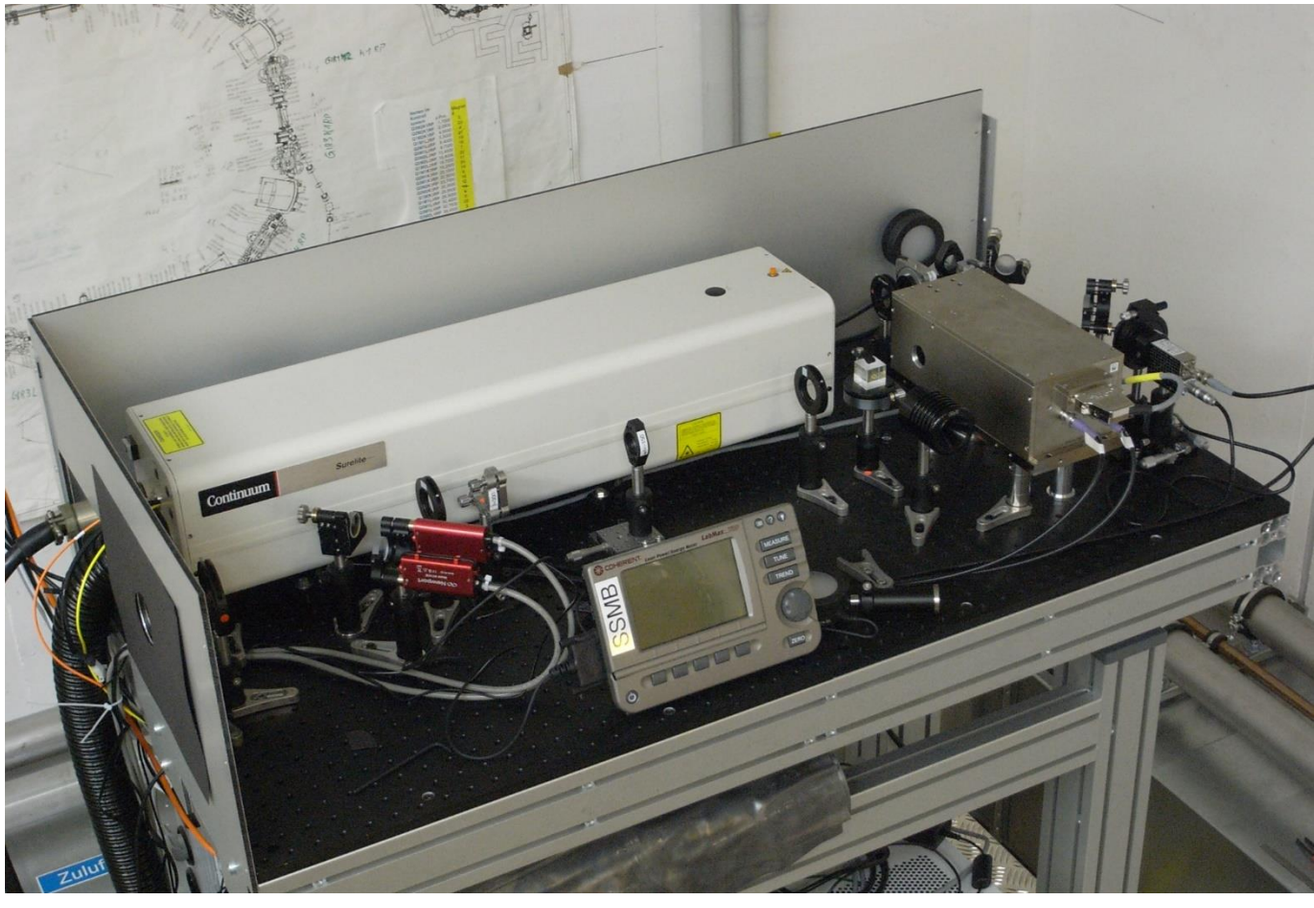
Continuum
SSMB

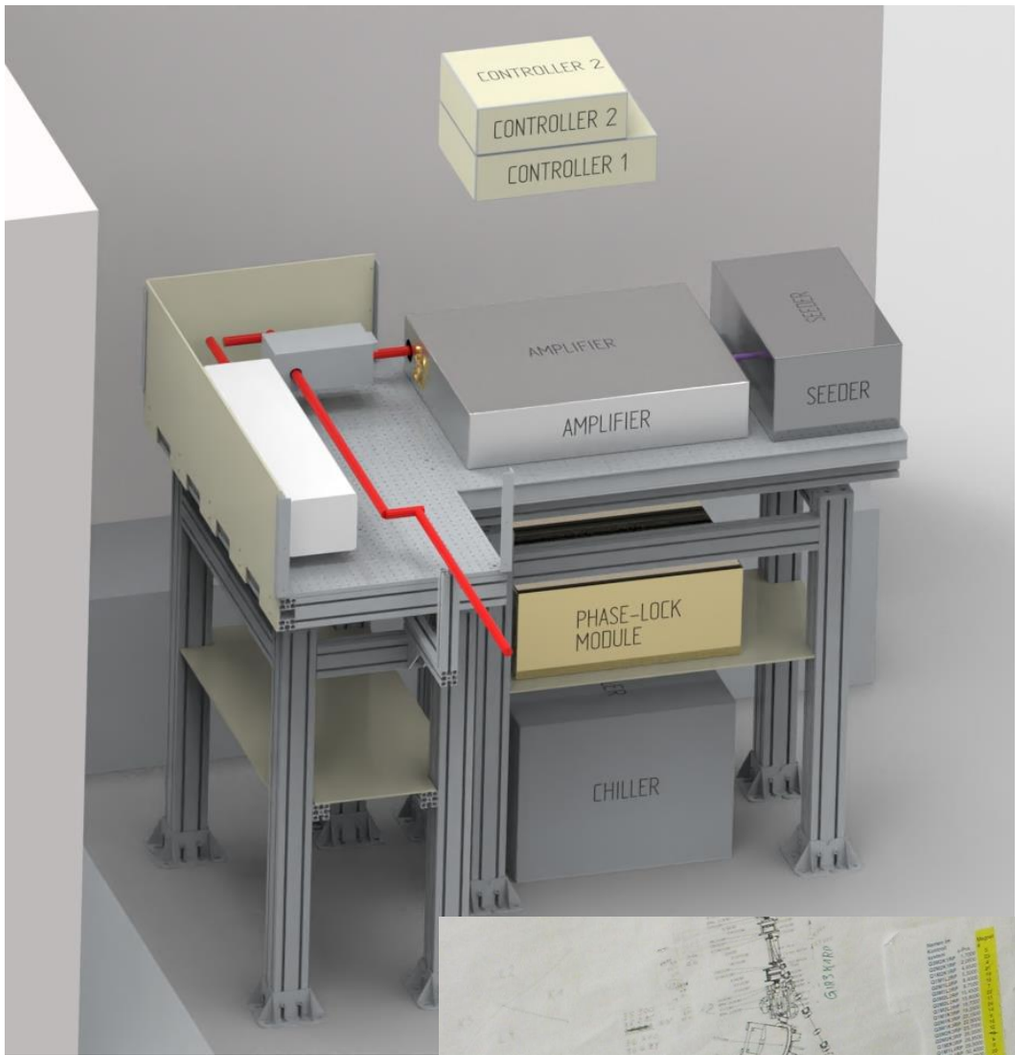
CONTROLLER 2
CONTROLLER 2
CONTROLLER 1
AMPLIFIER
AMPLIFIER
SEEDER
PHASE-LOCK MODULE
CHILLER

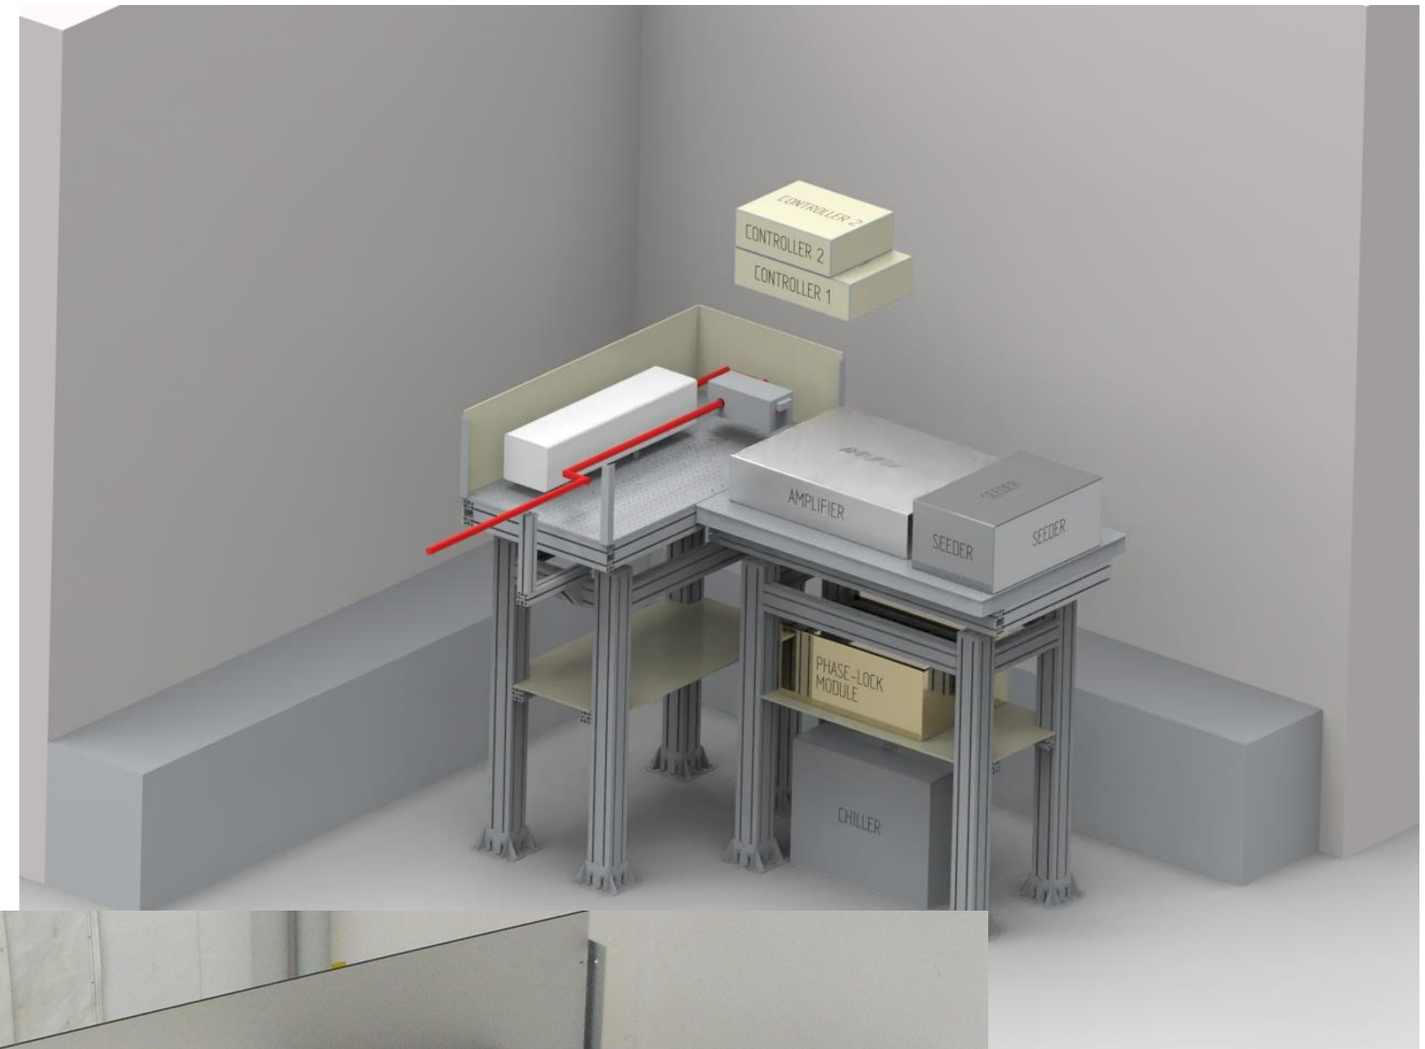
CONTROLLER 2
CONTROLLER 1
AMPLIFIER
SEEDER
PHASE-LOCK MODULE
CHILLER

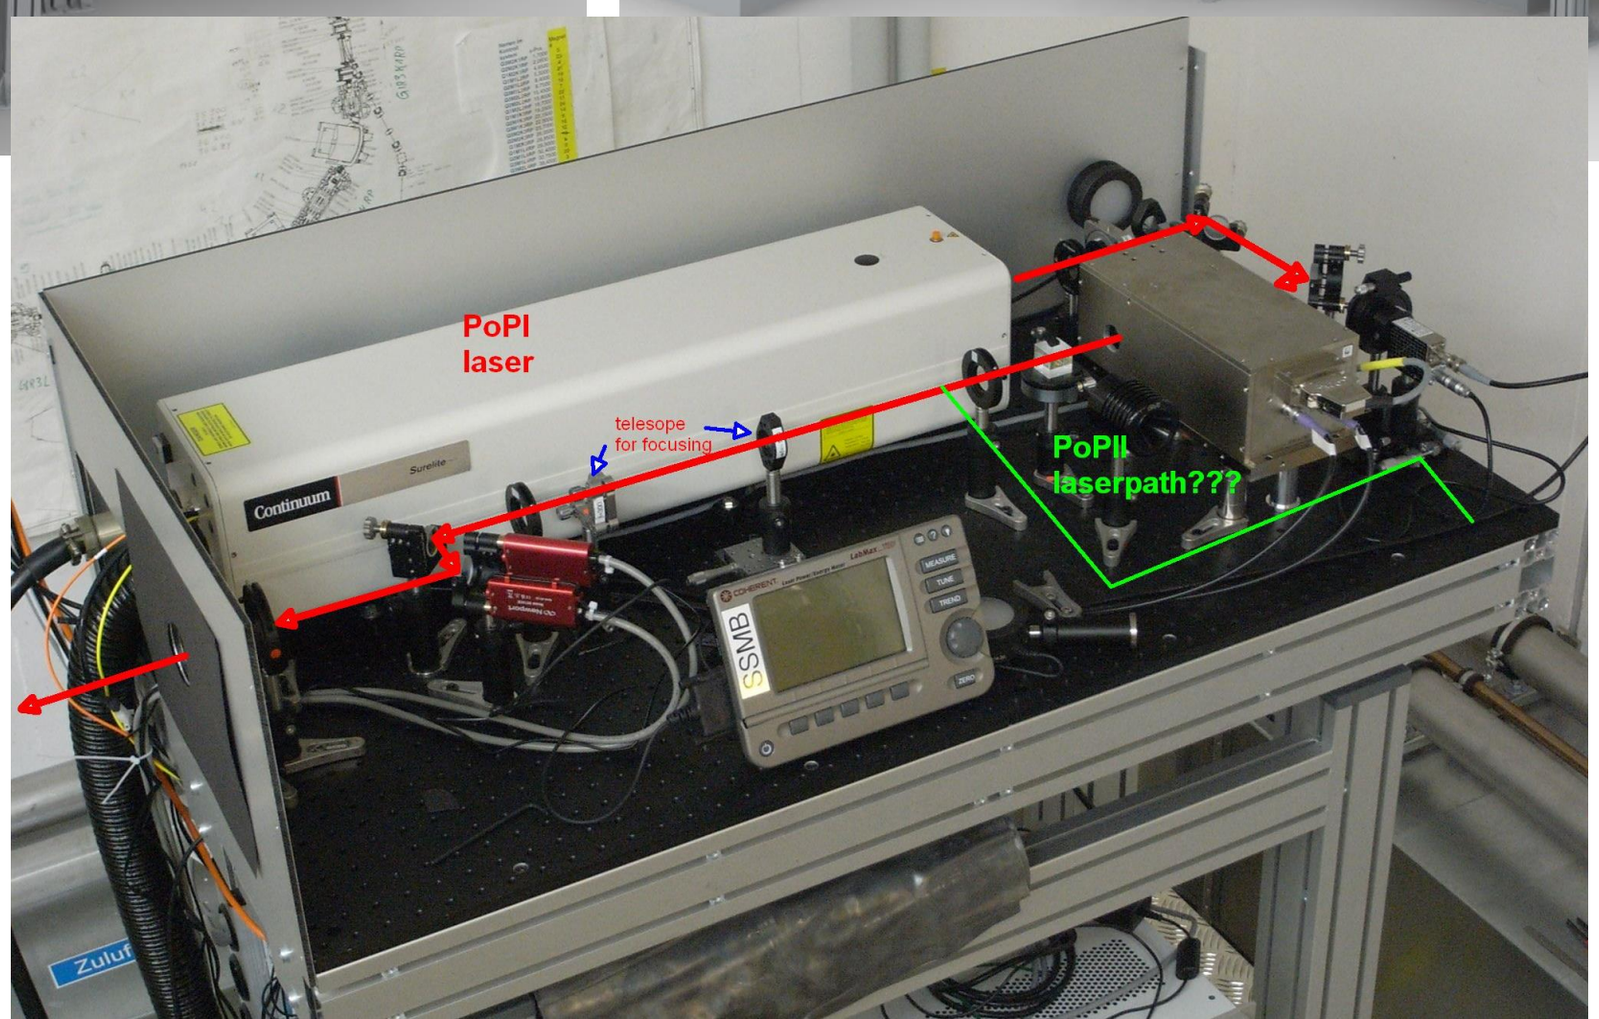
PoPI
laser
telesope
for focusing
PoPII
laserpath???
Continuum
Surelite
SSMB