




## FREEflap mini



http://support.kesseboehmer.de/freeflap

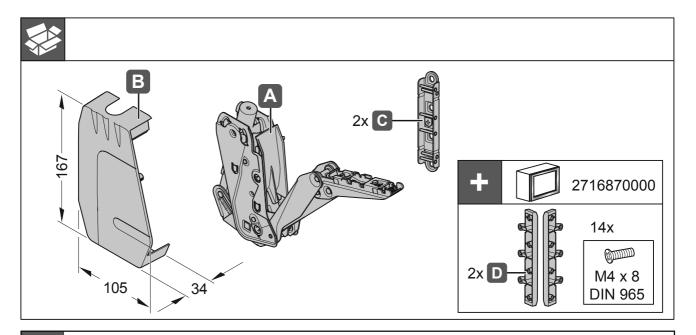


0
Ō
0
3
2
2
Ñ
₹
4


-
_
5
-
0000
C
-
>
_
_
C
7
٠.
0
c
Ξ
010
C
-
-
-
c
000
•
_
C
-

0	7	•
1		
(		
(	^	•
	5	
٩	-	
1		
	_	_
i	7	•
L	1	
1		•
:		
	1	


	mm		lig max t	7035	9966
		Α	1,7 - 4,6	2716617035	2716619966
	200	В	3,6 - 7,9	2716627035	2716629966
		С	6,8 - 14,7	2716637035	2716639966
		Α	1,5 - 4,1	2716617035	2716619966
	225	В	3,1 - 7,1	2716627035	2716629966
		С	6,0 - 13,1	2716637035	2716639966
		А	1,3 - 3,8	2716617035	2716619966
	250	В	2,9 - 6,4	2716627035	2716629966
+/"	200	С	5,4 - 11,8	2716637035	2716639966
		A	1,2 - 3,3	2716617035	2716619966
	275	В	2,5 - 5,7	2716627035	2716629966
		С	4,8 - 10,6	2716637035	2716639966
		Α	1,1 - 3,1	2716617035	2716619966
	300	В	2,4 - 5,1	2716627035	2716629966
		С	4,4 - 9,6	2716637035	2716639966
		A	1,0 - 2,8	2716617035	2716619966
	325	В	2,1 - 4,6	2716627035	2716629966
kg ≤ (kg max!)		С	4,0 - 8,8	2716637035	2716639966
	350	Α	0,9 - 2,6	2716617035	2716619966
		В	2,0 - 4,2	2716627035	2716629966
		С	3,7 - 8,1	2716637035	2716639966
		А	0,9 - 2,3	2716617035	2716619966
	375	В	1,9 - 3,8	2716627035	2716629966
		С	3,5 - 7,5	2716637035	2716639966
	400	А	0,8 - 2,1	2716617035	2716619966
		В	1,7 - 3,6	2716627035	2716629966
		С	3,2 - 7,0	2716637035	2716639966
	425	A	0,7 - 1,9	2716617035	2716619966
		В	1,5 - 3,4	2716627035	2716629966
		С	2,9 - 6,5	2716637035	2716639966
	450	A	0,6 - 1,7	2716617035	2716619966
		В	1,4 - 3,2	2716627035	2716629966
		C	2,7 - 6,1	2716637035	2716639966


## **KESSEBÖHMER**

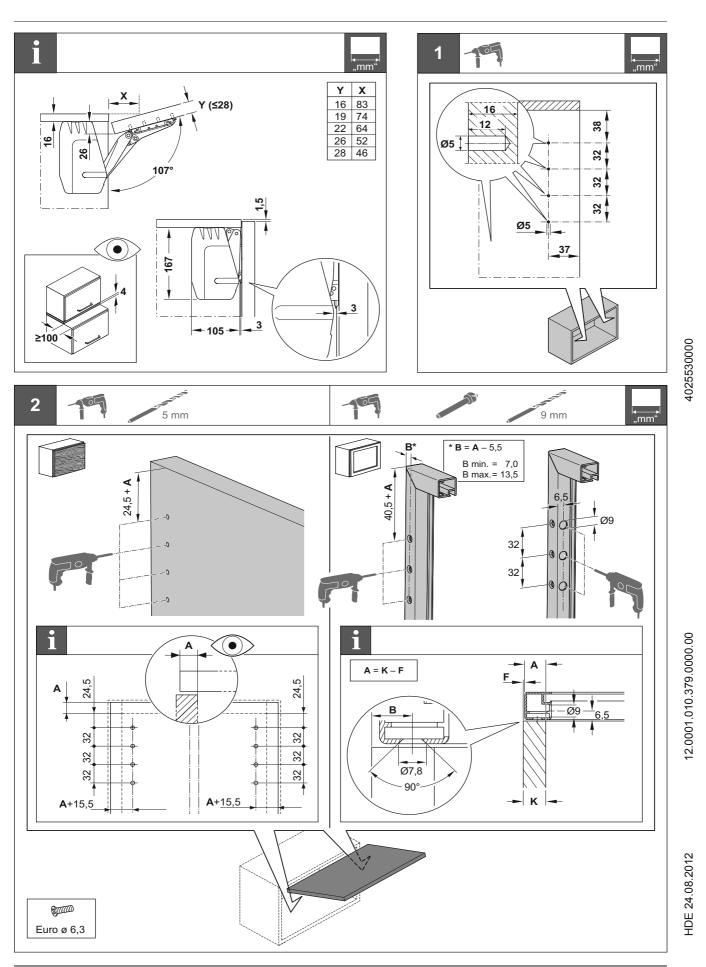


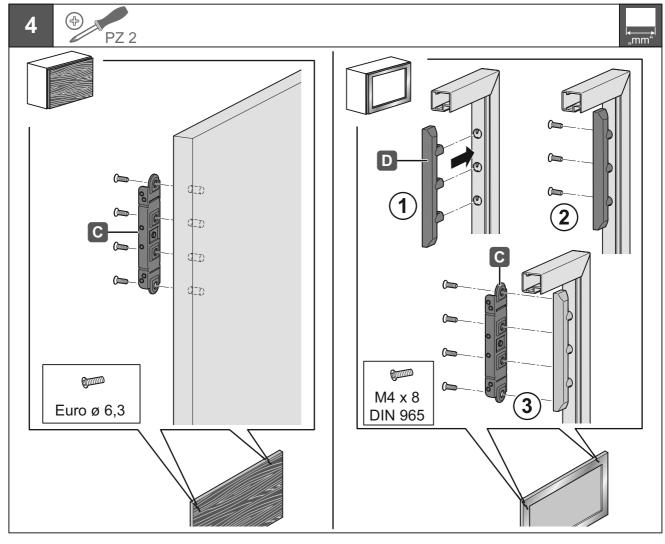


## **KESSEBÖHMER**

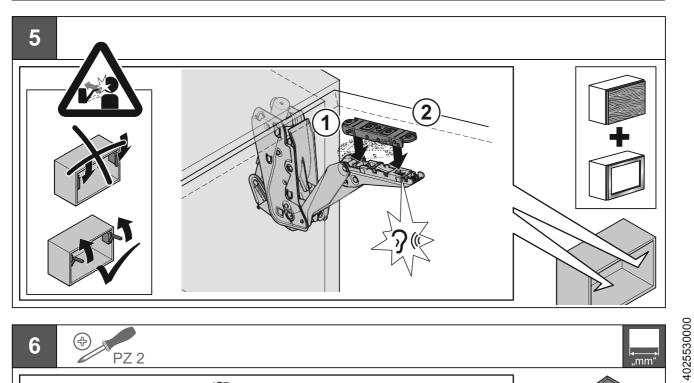

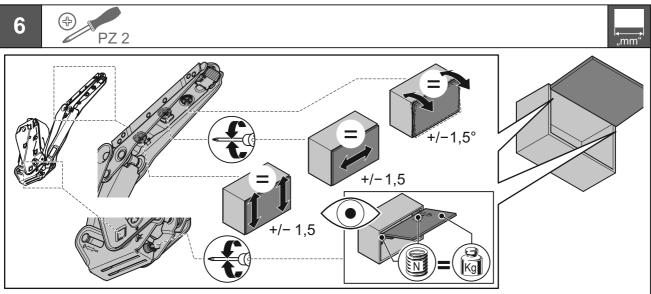





12.0001.010.379.0000.00

HDE 24.08.2012