

MULTIPLE-DEVICE JTAG CONFIGURATION IN THE SILICON LABS IDE

1. JTAG Chain Configuration

To configure the Multiple-Device JTAG Chain feature of the Silicon Labs IDE you need to provide the following information:

- The number of devices before and after the target.
- The number of bits in the IR registers of the devices before and after the target.

In the Silicon Labs IDE, select **Connection Options...** from the **Options** menu. In the **Connection Options** window, press the **JTAG Chain Configuration** button to open the **Multi-device JTAG Programming** dialogue box shown below. In versions of the IDE previous to v2.0, press the key combination **ctrl+shift+m** to open the **Multi-device JTAG Programming** dialogue box.

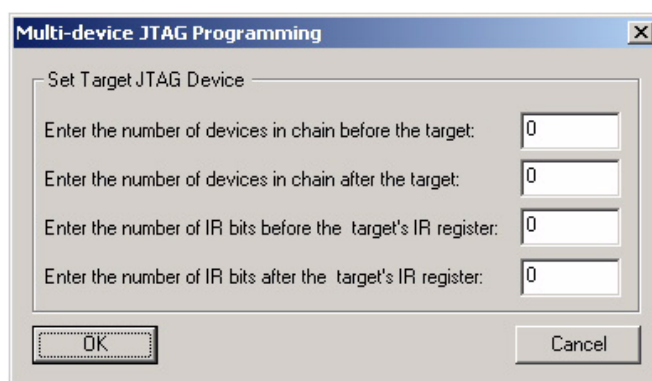


Figure 1. Multi-Device JTAG Programming Dialogue Box

2. Order of Devices

See Figure 2 to determine the order of the devices in the chain.

- Device #0 is before Device #1 and Device #2
- Device #1 is before Device #2 and after Device #0.
- Device #2 is after Device #1 and Device #0.

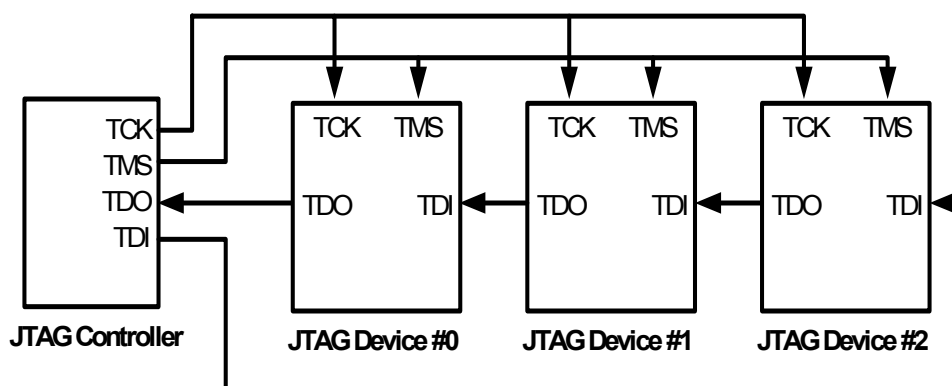


Figure 2. Typical JTAG Chain Connection

3. Example

This example uses three devices placed in the order shown on the previous page with the following configuration:

Device #0 has a 16 bit IR register.

Device #1 has an 8 bit IR register.

Device #2 has a 16 bit IR register.

If the Silicon Labs device that you want to program is Device #0, enter the following configuration information into the Multi-device JTAG Programming window as shown in Figure 3:

- There are 0 devices before the target.
- There are 2 devices after the target.
- There are 0 IR bits before the target's IR register.
- There are 24 IR bits after the target's IR register.

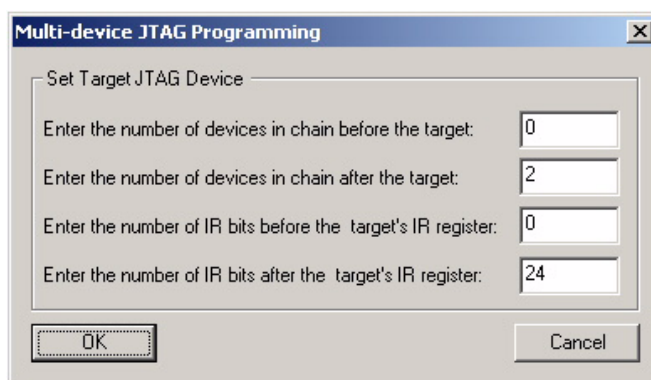


Figure 3. Multi-Device JTAG Programming Example

DOCUMENT CHANGE LIST

Revision 1.1 to Revision 1.2

- Updated last paragraph in "1. JTAG Chain Configuration" on page 1.

CONTACT INFORMATION

Silicon Laboratories Inc.
4635 Boston Lane
Austin, TX 78735
Tel: 1+(512) 416-8500
Fax: 1+(512) 416-9669
Toll Free: 1+(877) 444-3032
Email: MCUinfo@silabs.com
Internet: www.silabs.com

The information in this document is believed to be accurate in all respects at the time of publication but is subject to change without notice. Silicon Laboratories assumes no responsibility for errors and omissions, and disclaims responsibility for any consequences resulting from the use of information included herein. Additionally, Silicon Laboratories assumes no responsibility for the functioning of undescribed features or parameters. Silicon Laboratories reserves the right to make changes without further notice. Silicon Laboratories makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Silicon Laboratories assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Silicon Laboratories products are not designed, intended, or authorized for use in applications intended to support or sustain life, or for any other application in which the failure of the Silicon Laboratories product could create a situation where personal injury or death may occur. Should Buyer purchase or use Silicon Laboratories products for any such unintended or unauthorized application, Buyer shall indemnify and hold Silicon Laboratories harmless against all claims and damages.

Silicon Laboratories and Silicon Labs are trademarks of Silicon Laboratories Inc.

Other products or brandnames mentioned herein are trademarks or registered trademarks of their respective holders.