




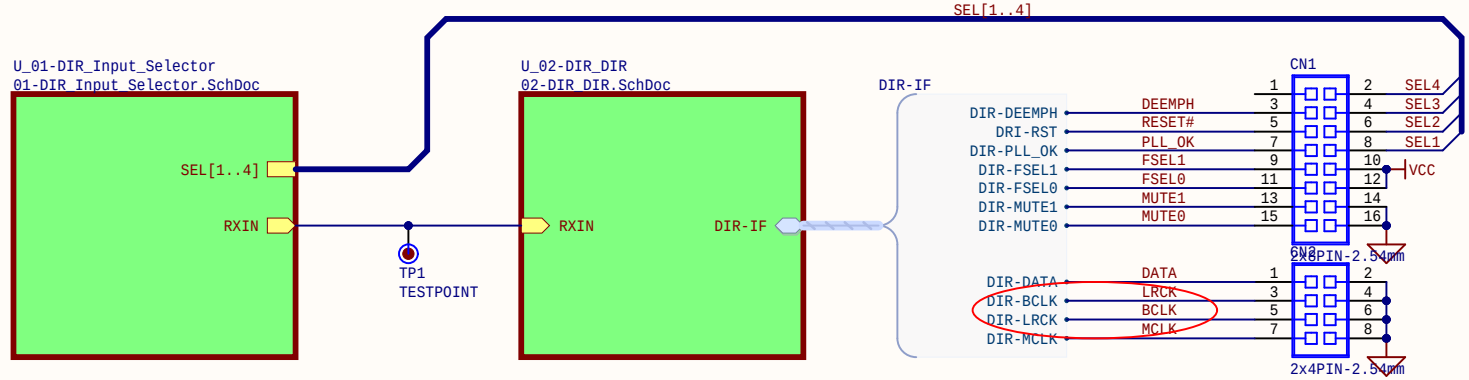


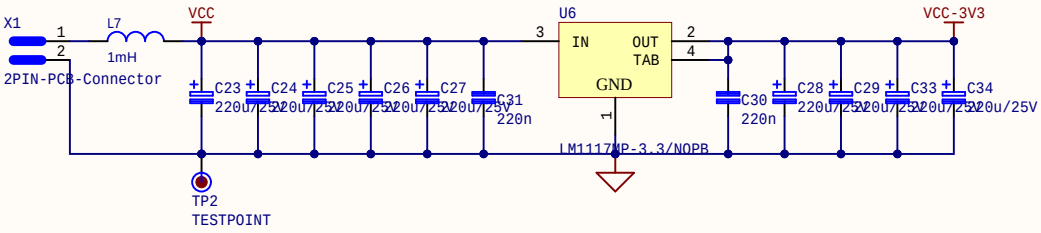






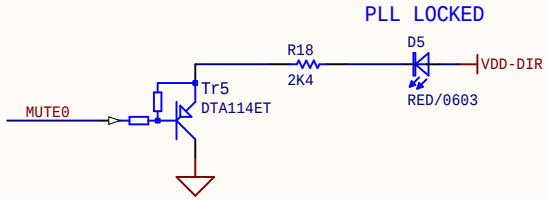



			版本	0.0	A001-001-001
			图幅	A4	第 1 页 共 1 页
设计	Leon Lee	2020/06/14	华南理工大学 South China University of Technology		
审核					

00-ECO-AudioDAC.SchDoc

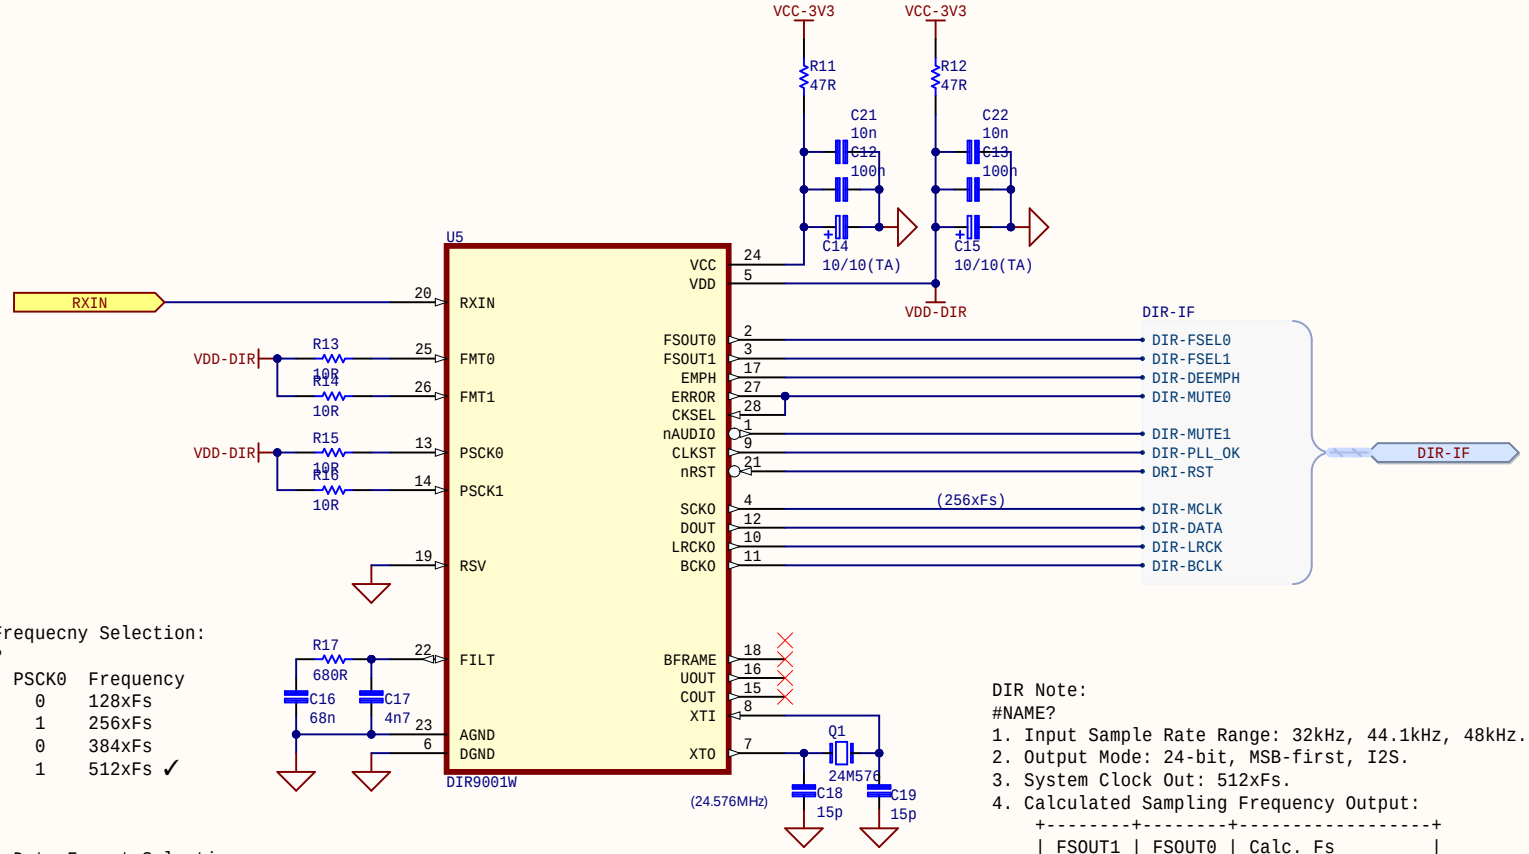

SCKO Frequecny Selection:
#NAME?

PSCK1	PSCK0	Frequency
0	0	128xFs
0	1	256xFs
1	0	384xFs
1	1	512xFs ✓


Output Data Format Selection:
#NAME?

FMT1	FMT0	Format
0	0	16-bit, MSB-first, Right-justifed
0	1	24-bit, MSB-first, Right-justifed
1	0	24-bit, MSB-first, Left-justifed
1	1	24-bit, MSB-first, I2S ✓

DIR Note:
#NAME?
1. Input Sample Rate Range: 32kHz, 44.1kHz, 48kHz.
2. Output Mode: 24-bit, MSB-first, I2S.
3. System Clock Out: 512xFs.
4. Calculated Sampling Frequency Output:


FSOUT1	FSOUT0	Calc. Fs
H	L	Out of Range
H	H	32kHz
L	L	44.1kHz
L	H	48kHz

			版本	0.0	A001-001-001
			图幅	A4	第 1 页 共 1 页
设计	Leon Lee	2020/06/14	华南理工大学 South China University of Technology	
审核				

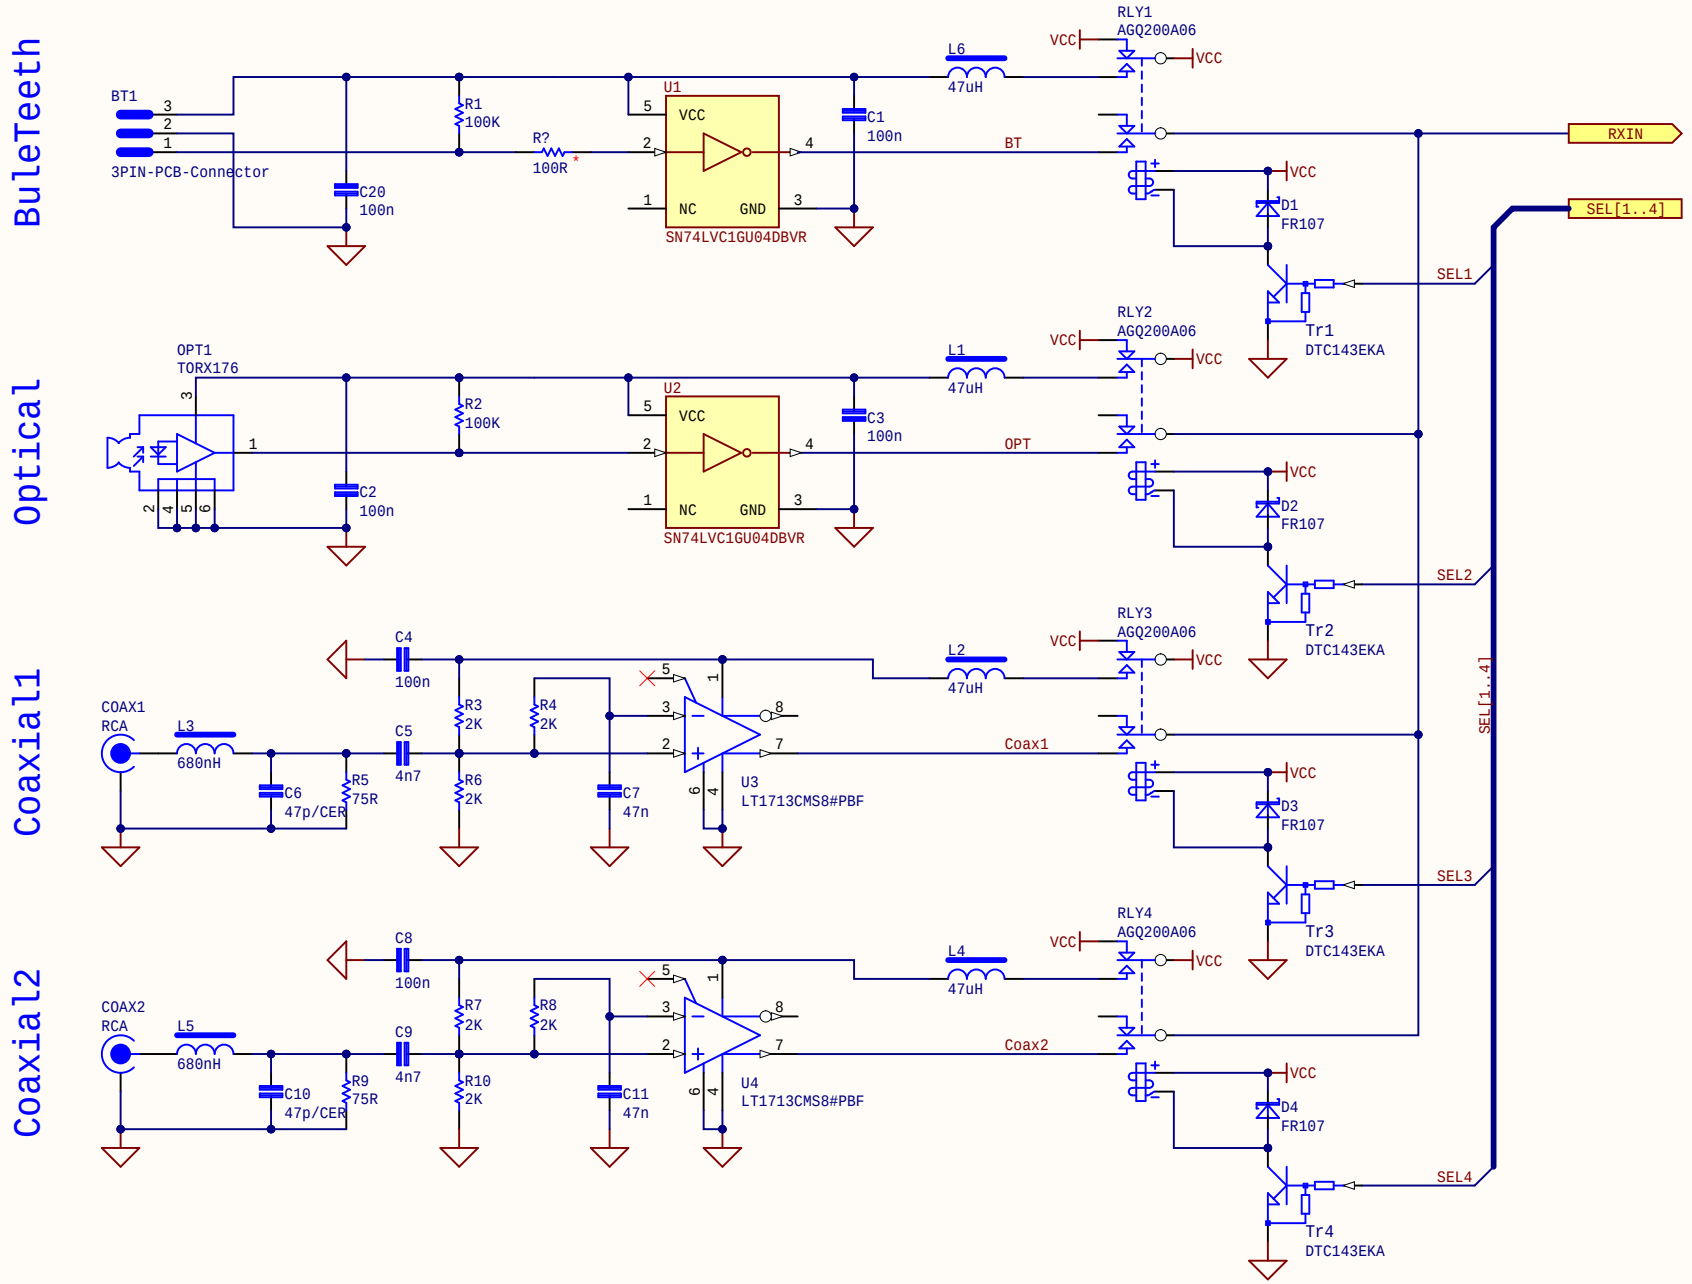

			版本	0.0	A001-001-001
			图幅	A4	第 1 页 共 1 页
设计	Leon Lee	2020/06/14	华南理工大学 South China University of Technology	
审核				

01-DIR_Input_Selector.SchDoc

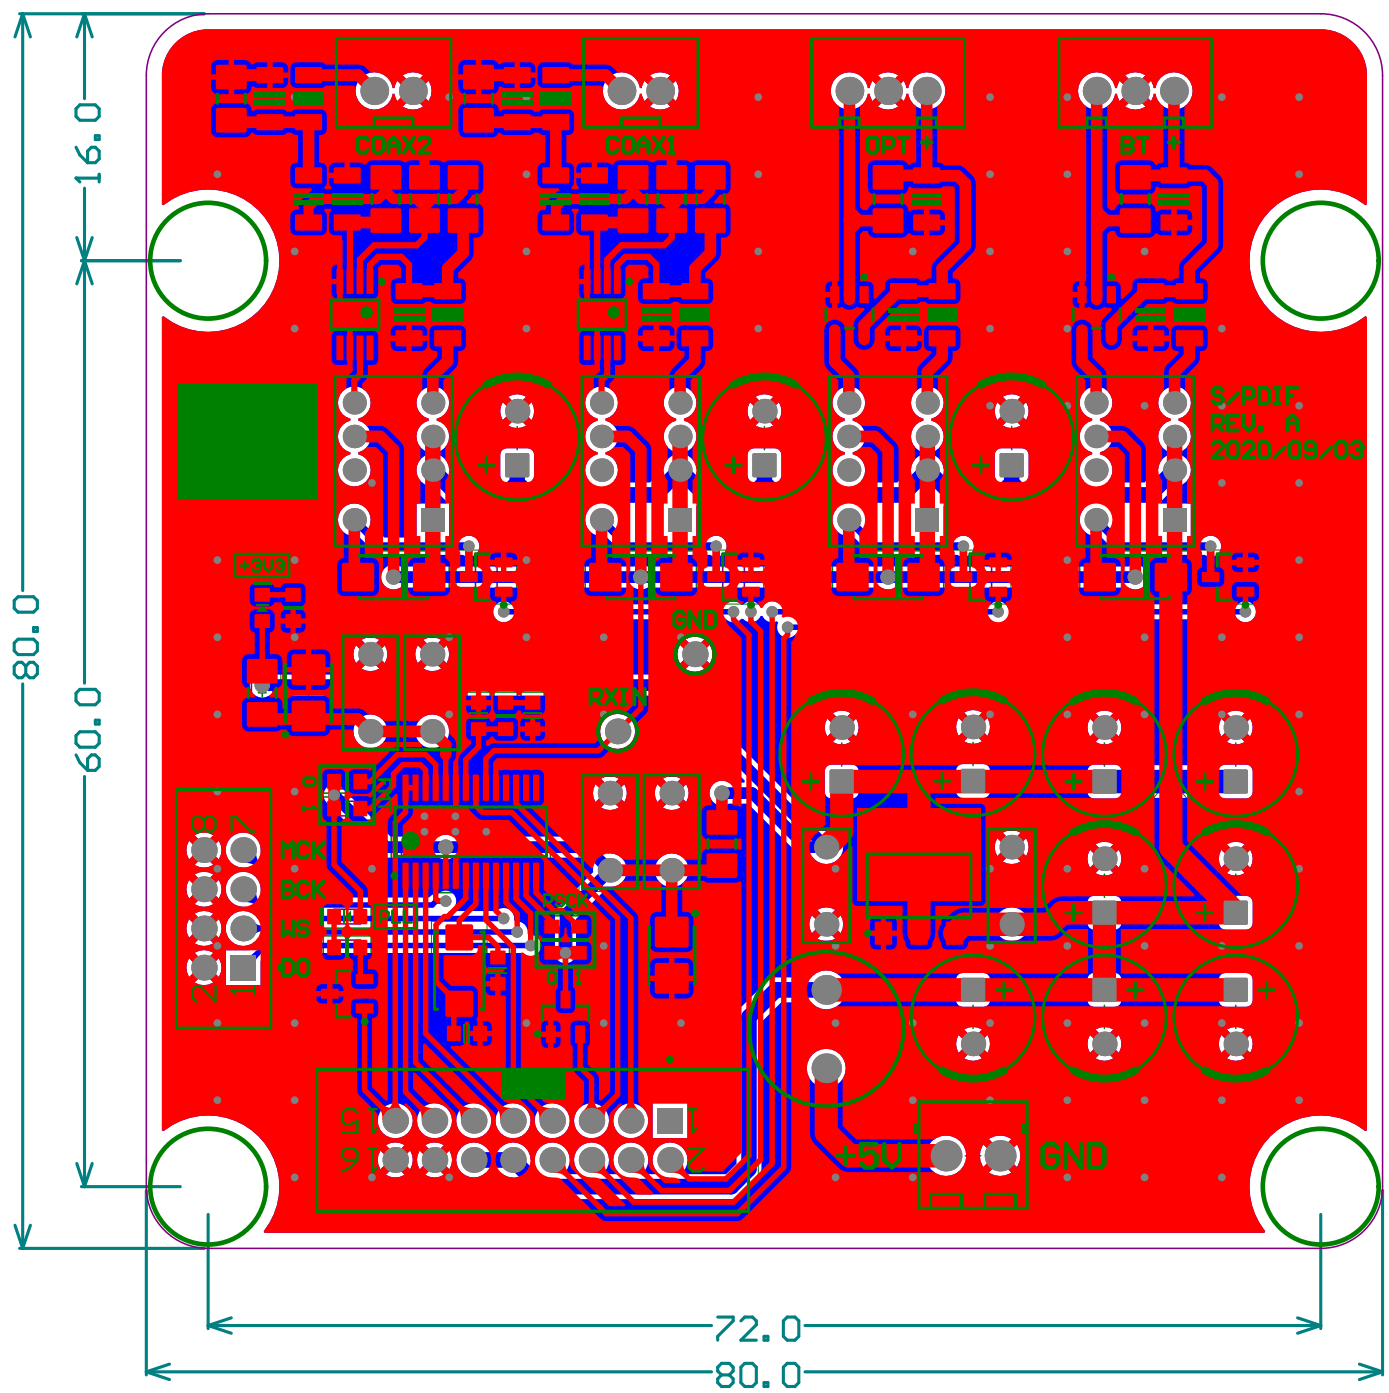
COAX2
COAX1
OPT
BT
S/PDIF
REV. A
2020/09/03
+3V3
GND
RXIN
MCK
BCK
WS
DO
+5V
GND
16.0
80.0
60.0
72.0
80.0