


Automation Solutions_KUKA Positioner KP2-HV_1100_2600 HW

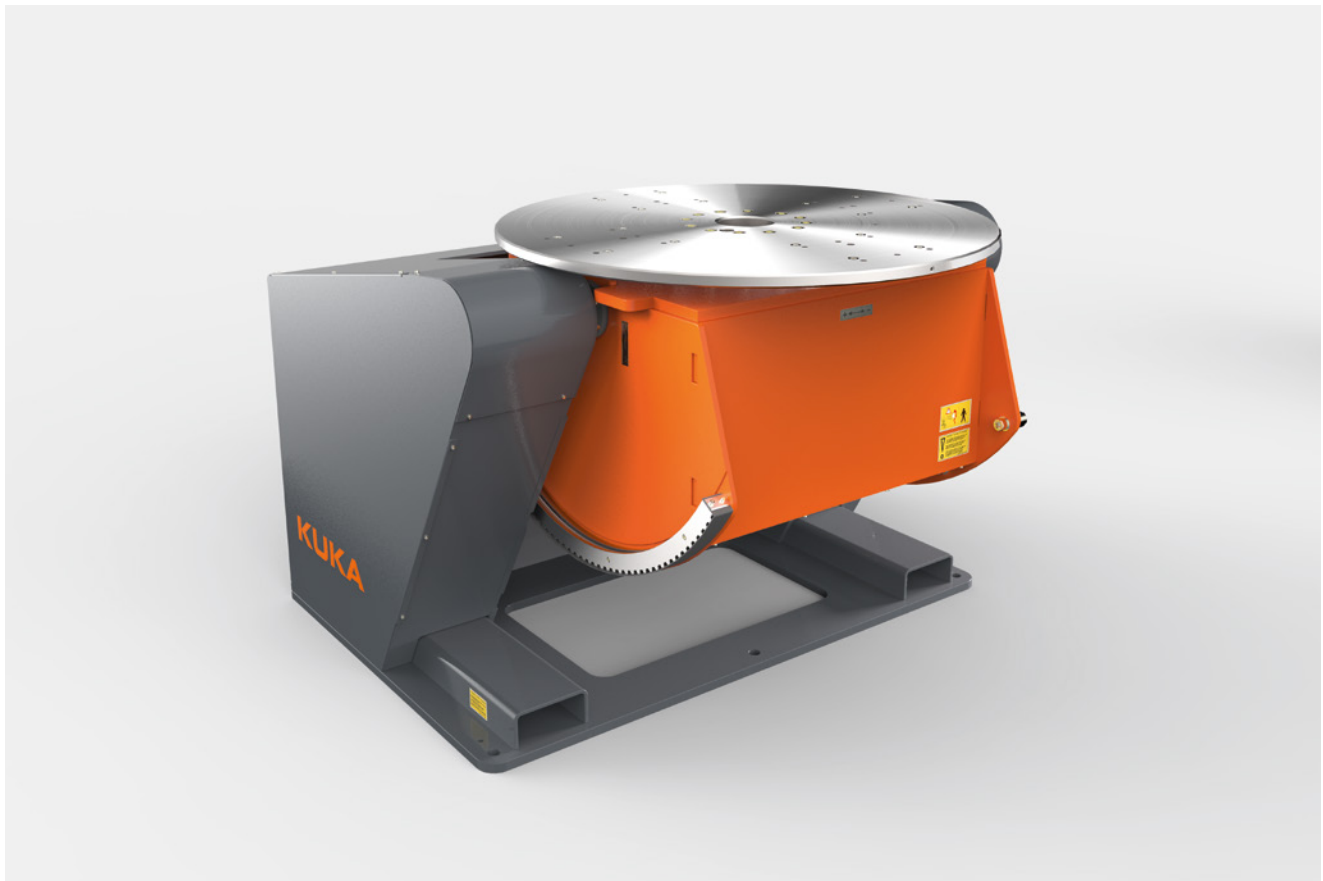

The two-axis positioner **KP2-HV HW** has a rotational axis and a tilting axis that are controlled via the robot controller and enable the precise positioning of large and heavy workpieces. The **KP2-HV 1100 HW** can be used to move payloads of up to 1,100 kg and the **KP2-HV 2600 HW** payloads of up to 2,600 kg. The **KP2-HV positioner** is thus ideally suited to large and heavy workpieces that have to be reoriented repeatedly during the machining process due to their geometry or for reasons of process accessibility.

Typical areas of application include welding applications for construction equipment and agricultural machinery, commercial vehicles and industrial trucks, as well as applications in the aerospace and power engineering sectors.

The robust design, the use of tried-and-tested standard components, simple operation and ergonomics, and minimal maintenance requirements make the positioner extremely service-friendly and efficient.

Further features of the positioner:

- Robust design for excellent stability
- Optimally protected for operation in a harsh production environment IP 65
- All gear units are maintenance-free for 7 years
- Can be combined with any KUKA robot
- Quick and easy EMD mastering
- Integrated connector panel for simple cabling


Scope of supply consists of:

- Basic assembly
- Possibly additional option packages

Automation Solutions_KUKA Positioner KP2-HV_1100_2600 HW

Technical data

	KP2-HV 1100 HW	KP2-HV 2600 HW
Max. payload (horizontal rotational axis)	1,100 kg	2,600 kg
Max. moment of inertia	250 kgm ²	500 kgm ²
Max. torque of tilting axis	5,100 Nm	9,250 Nm
Max. torque of rotational axis	2,200 Nm	3,900 Nm
Tilting range	115°	120°
Turning range	370°	370°
Velocity Tilting axis	60 %	25 %
Velocity Rotational axis	90 %	50 %
Loading height	1,085 mm	1,145 mm
Height of tilting axis	865 mm	995 mm
Width	1,200 mm	1,630 mm
Depth	790 mm	1,120 mm
Repeatability	± 0,20 mm r = 400 mm	± 0,35 mm r = 400 mm
Hollow shaft for routing media	Ø 140 mm	Ø 140 mm
Weight	1,500 kg	2,000 kg
Face plate diameter	Ø 800 mm	Ø 1,200 mm

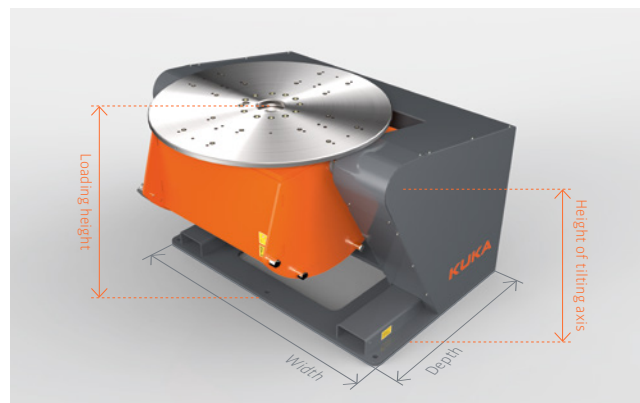

Options

- Energy supply system consisting of:
 - Air
 - Parameter cable and
 - Signal cable (ProfiNet)
- Weld ground return incl. installation
(400 A / 800 A with 60 % duty cycle)
- Mechanical locking device incl. installation
- Adjustable sleeves for leveling

Principal components

- 01 Face plate
- 02 Basic assembly with drive unit
- 03 Media interface

For further information please contact us at
products.industries.de@kuka.com