




Listening to DAB Digital Radio (R-1045DAB only)

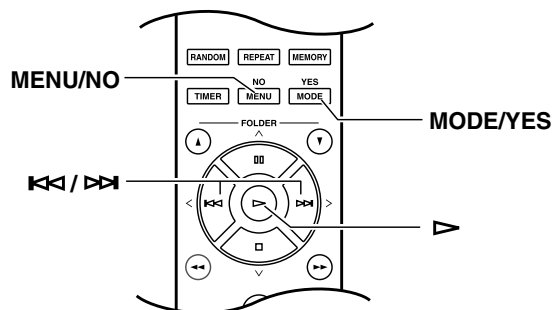

Press the [TUNER] button repeatedly to select “DAB”.



When tuned into a DAB station, the Tuned indicator appears and the DAB indicator as well.

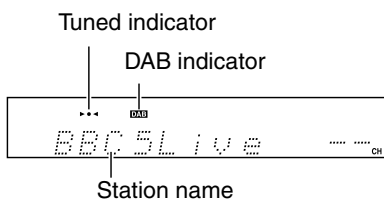

On the front panel, press the [INPUT] knob repeatedly to select “DAB”.

Selecting DAB for the Very First Time

The very first time you select DAB, the Auto Tuning function automatically scans the DAB Band III for the multiplexes (i.e., stations) available in your area. Once the scanning process is complete, the first station that was detected is selected.

Using the Scan Function Manually

If a new DAB station is introduced, or you move to a new area, you can run the Auto Tuning function manually.

- 1 Press the [MENU/NO] button.
- 2 Use the Previous and Next [\ll]/[\gg] buttons to select “Scan?” and then press [\triangleright].
- 3 Use the Previous and Next [\ll]/[\gg] buttons to select World or U.K., (see “Scan?” on page 47), and then press [\triangleright] to start the Auto Tuning function.

To cancel Auto Tuning, press the [\triangleright], [MENU/NO] or [MODE/YES] button.

If no station is detected after scanning, “No Station” appears on the display.

You can also use the front panel controls.

- 1 Push the [MULTI JOG] control.
- 2 Turn the [MULTI JOG] control to select “Auto Tuning?” and then push it.
- 3 Turn the [MULTI JOG] control to select World or U.K., and then push it to start the Auto Tuning function.

To cancel Auto Tuning, push the [MULTI JOG] control.