



- f. Place withdrawal hook around ripcord locking pin.
- g. Place withdrawal hook in withdrawal hook retainer.
- h. Tighten knurled locking nut finger tight.

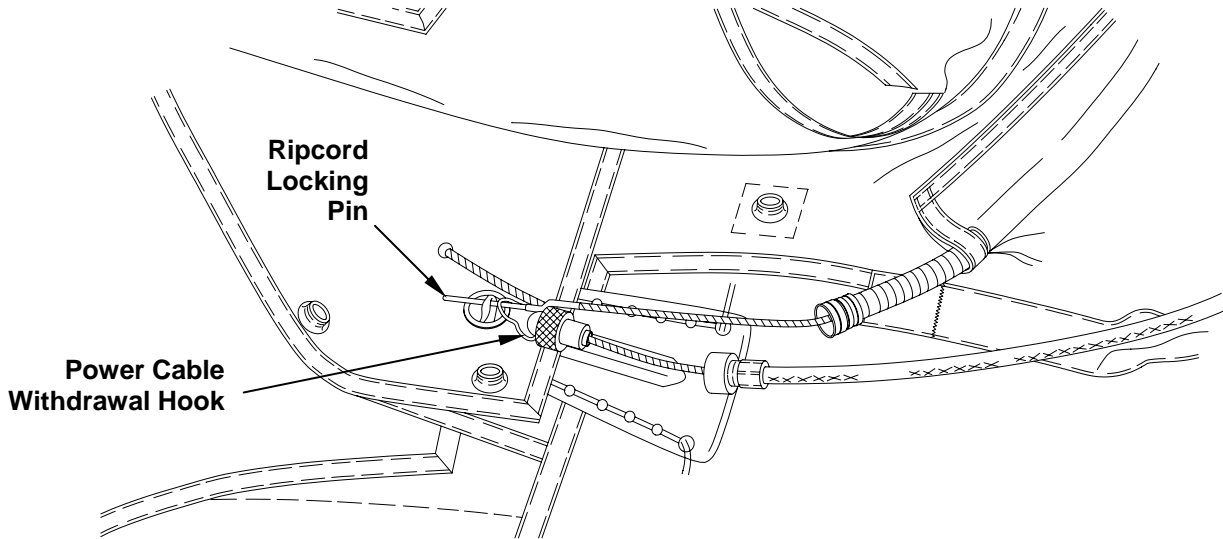

- i. Rigger check number 6.
- j. Close ripcord pin protective flap, cable housing protective flap, and riser protective covers.

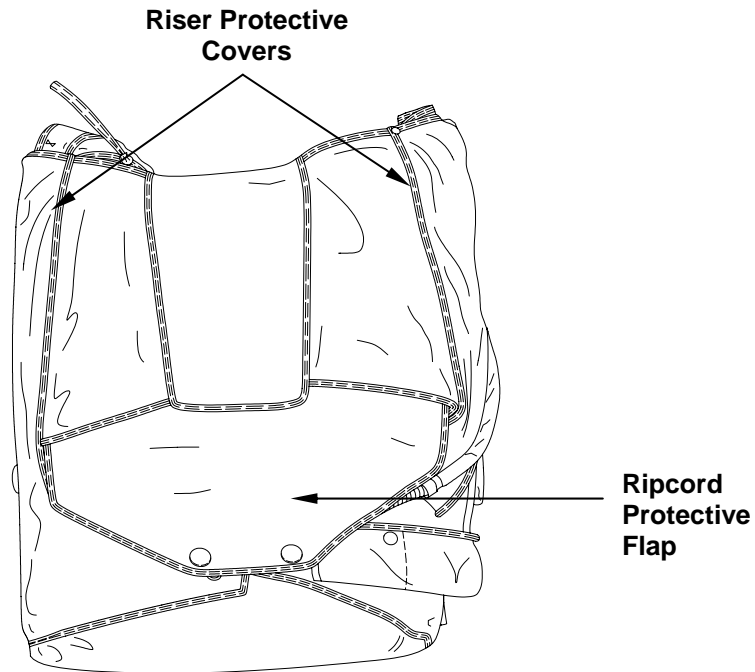

END OF WORK PACKAGE