

All lines measured pulled to equal tension (5 -35 pounds typical, varies by manufacturer and line type) parallel to the "A" line, and secured to the same connector link or peg.

When measuring control line trim, secure the deployment setting eye to the connector link or peg.

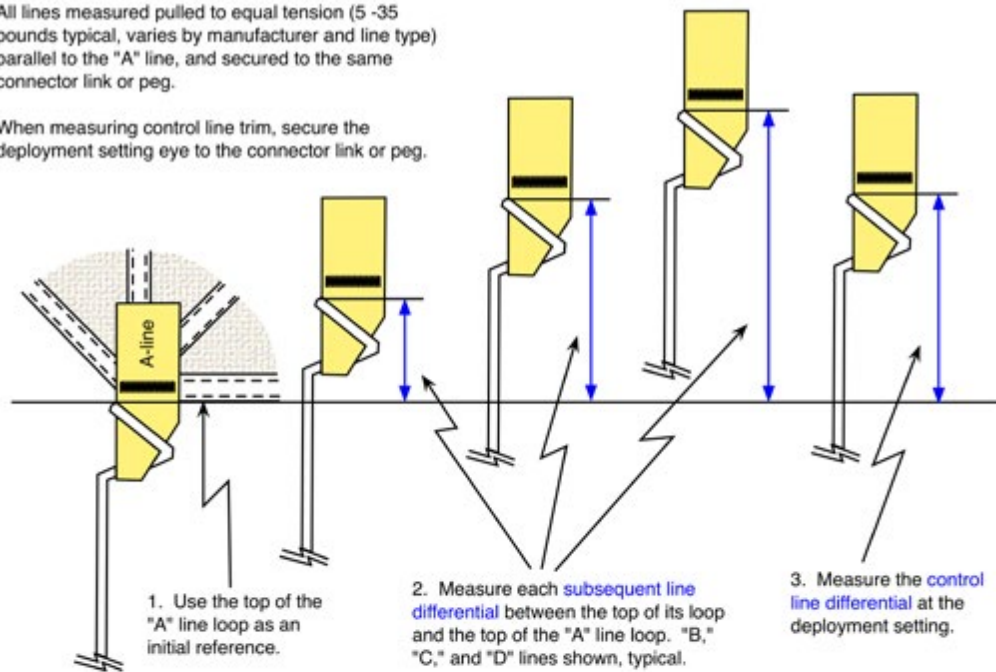


Figure 1a. Measuring line length trim.

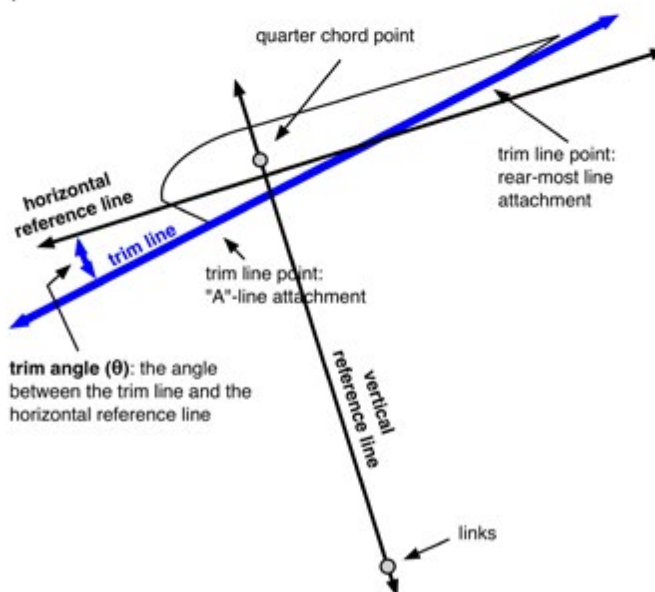


Figure 1b. Measuring trim angle.