

- It is possible to remove a licensed function by using right-click on a licensed function and selecting remove license key as shown in Figure 4-17.



Figure 4-17 Remove License Key

4.3.2 Networking

Select Networking on the Settings menu to access the Networking page to set up management Ethernet ports and iSCSI Ethernet ports on the TS1160 model 60E and TS1155 model 55E.

Management Ethernet Ports

Use the Management Ethernet Ports menu to display and configure the ports on each library controller card (LCC). Each port can enable or disable a particular protocol. The LCC that is specified for each port is the LCC to which that network connects when local hardware communicates with remote hardware.

By selecting the **Network** option, the Ethernet Ports window opens, as shown in Figure 4-18, which displays the current settings of all ports and displays their status.

Port	IPv4	IPv6 Static	IPv6 DHCP	IPv6 Stateless Au...	IPv6 Link Local
Frame 2 Port A	Disabled	Disabled	Disabled	Disabled	Disabled
Frame 2 Port B	Disabled	Disabled	Disabled	Disabled	Disabled
Frame 4 Port A	9.11.120.137	Disabled	Disabled	Disabled	Disabled
Frame 4 Port B	Disabled	Disabled	Disabled	Disabled	Disabled
Frame 5 Port A	9.11.120.40	Disabled	Disabled	Disabled	Disabled
Frame 5 Port B	Disabled	Disabled	Disabled	Disabled	Disabled

Figure 4-18 Ethernet Ports window

Use this window to change the Internet Protocol (IP) address that you use to access the management GUI. Individual frames and ports can be configured to use IPv4, IPv6, or both types of IP addresses.

Use the Actions menu to modify an Ethernet port or display its properties, as shown in Figure 4-19.

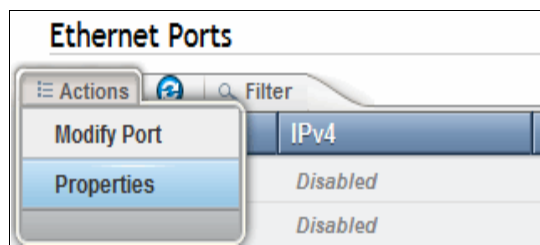


Figure 4-19 Ethernet ports