


6. Attach left riser to harness in same manner as in step 2. through 5.
7. Connect reserve static line ring to reserve static line release shackle.



8. Mate and close snap on reserve static line release lanyard to riser snap.

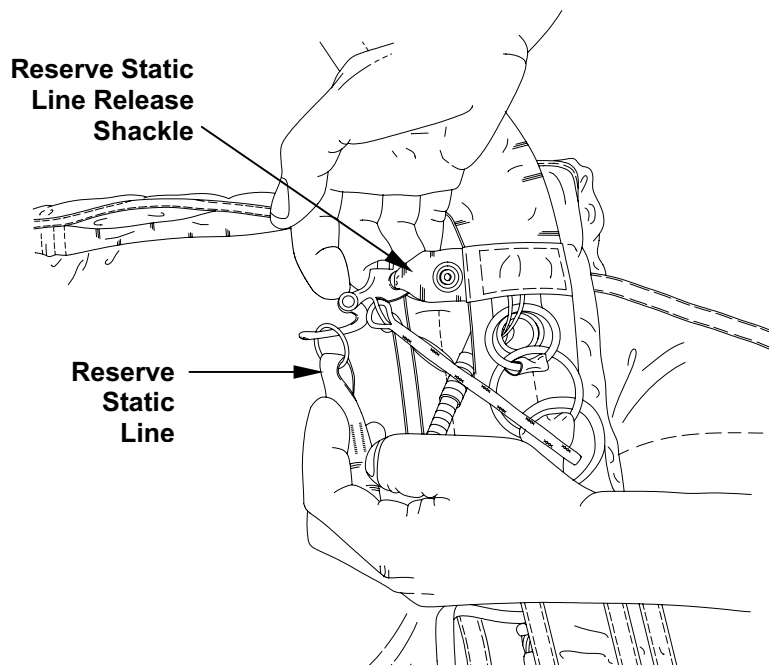