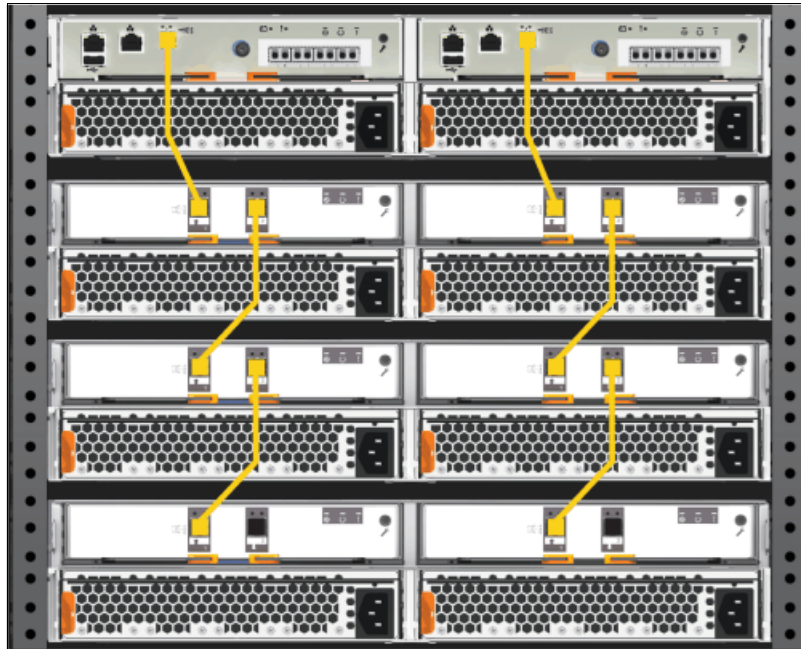


The Storwize V5010 supports one SAS chain for each control enclosure, and up to 10 expansion enclosures can be attached to this chain. The node canister uses SAS port 1 for expansion enclosures.

Always cable from the top down. Cabling from the bottom to the top is not supported.

Figure 12-19 shows the SAS cabling on a Storwize V5010 with three attached expansion enclosures.



*Figure 12-19 SAS expansion cabling on the Storwize V5010*

The Storwize V5020 supports one SAS chain for each control enclosure, and up to 10 expansion enclosures can be attached to this chain. The node canister uses SAS port 1 for expansion enclosures.

Always cable from the top down. Cabling from the bottom to the top is not supported.