


REAR FLOOR SIDE MEMBER (CUT)	 F21173A
REPLACEMENT	

REMOVAL

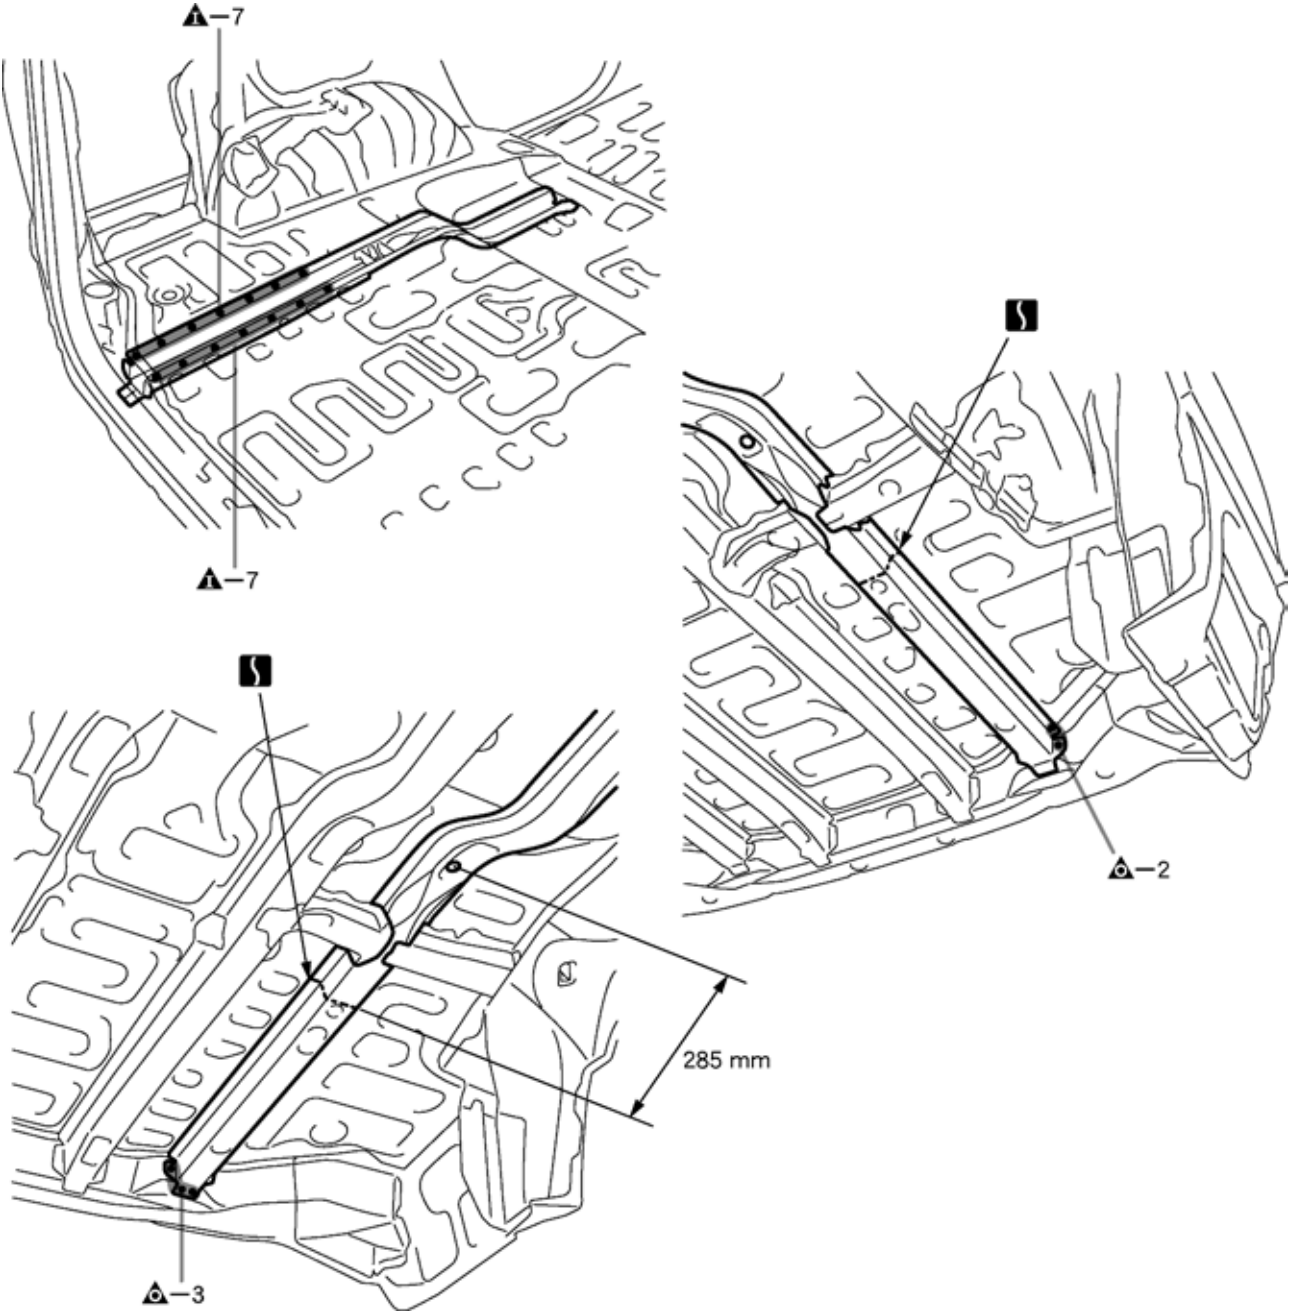


Diagram illustrating the removal of the rear floor side member. The member is shown being cut and removed from the floor pan. Dimensions of 285 mm are indicated for the length of the member.

Labels: $\Delta-7$, $\Delta-2$, $\Delta-3$

F21173

285 mm (11.22 in.)

INSTALLATION

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

