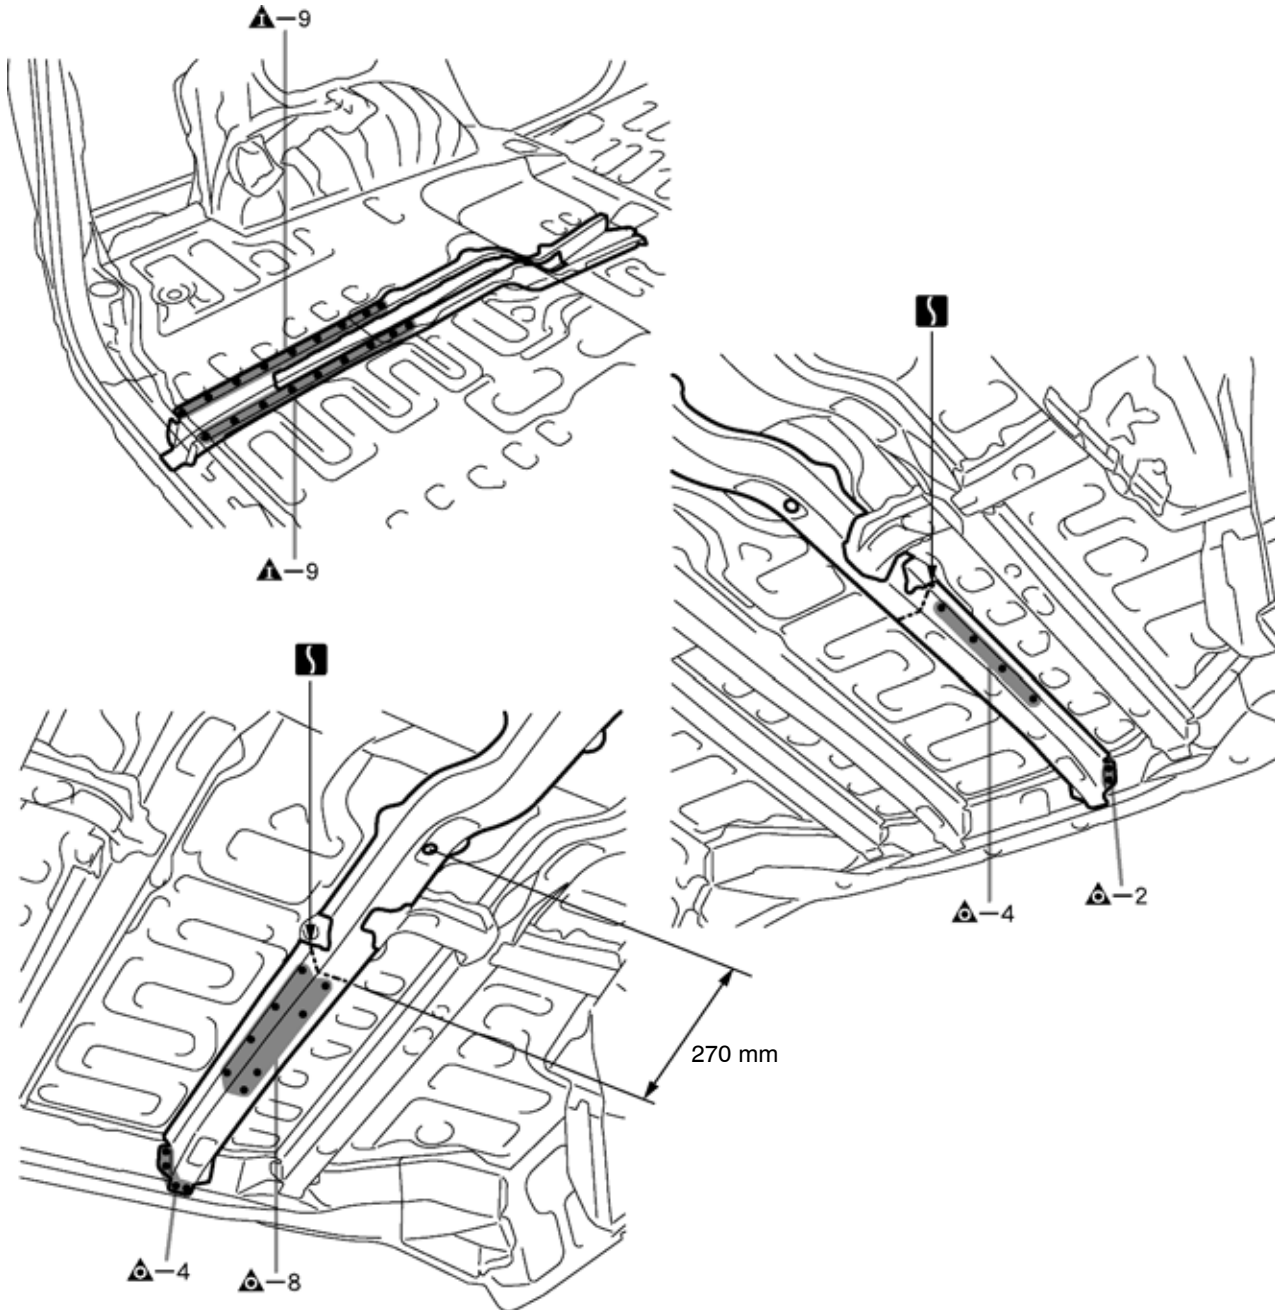


**REAR FLOOR SIDE CENTER MEMBER (CUT)****REPLACEMENT**

F21175A

**REMOVAL**

F21175

**POINT**

- 1 Take care not to damage the internal reinforcement.

270 mm (10.63 in.)

**INSTALLATION**

- Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- After welding, apply the polyurethane foam to the corresponding parts.
- After welding, apply body sealer and under-coating to the corresponding parts.
- After applying the top coat layer, apply anti-rust agent to the inside of the necked section structural weld spots.

