Real Time Clock Module with I²C Bus

AB-RTCMC-32.768kHz-AIGZ-S7

Moisture Sensitivity Level: MSL=1

Pb | **RoHS/RoHS II compliant**

3.2 x 1.5 x 0.8 mm

FEATURES:

• RTC module with built-in crystal oscillating at 32.768 kHz
• 350 nA timekeeping current at 3 V
• Timekeeping down to 1.0 V
• 1.3 V to 4.4 V I2C bus operating voltage
• Low operating current of 35 µA (at 400 kHz)
• 32.768kHz square wave on power-up to drive a microcontroller in
  low-power mode– Programmable from 1 Hz to 32.768kHz;– Can be disabled
• 400 kHz I2C serial interface
• Oscillator stop detection circuit monitors clock operation
• Accurate programmable watchdog– 62.5 ms to 31 min timeout
• Counters for tenths/hundredths of seconds, seconds, minutes, hours, day, date,
  month, year, and century
• Software clock calibration to compensate deviation of crystal due to temperature
• Automatic leap year compensation
• Ultra-small, 3.2 x1.5 mm, lead-free 8-pin ceramic leadless chip carrier

APPLICATIONS:

• Wide range in communication & measuring equipment
• Commercial & Industrial applications
• Automotive electronics applications
• Wireless communications
• PDA and Palm Pilots
• Credit Cards with Security Technology

STANDARD SPECIFICATIONS:

Absolute Maximum Ratings

In accordance with the Absolute Maximum Rating System IEC 60134

Parameters	Symbol	Conditions	Min.	Max.	Units
Supply Voltage	V_{DD}	>GND / <V_{DD}	GND-0.3	+5.0	V
Input Voltage	V_I		GND-0.2	V_{DD}+0.3	V
Output Voltage	V_O		GND-0.2	V_{DD}+0.3	V
Output Current	I_O			20	mA
Power Dissipation	P_D			1	W
Operating Ambient Temperature Range	T_{OPR}		-40	+85	℃
Storage Temperature Range	T_{STO}	Stored as bare product	-55	+125	℃
Electro Static Discharge Voltage	V_{ESD}	HBM[1] T_A = 25℃ MM[2] T_A = 25℃		>1500 >1000	V

1) HBM: Human Body Model, according to JESD22-A114.

2) MM: Machine Model, according to JESD22-A115.

These data are based on characterization results, not tested in production. Stresses above these listed maximum ratings may cause permanent damage to the device. Exposure beyond specified operating conditions may affect device reliability or cause malfunction.

Operating and AC Measurement Conditions [1]

Parameters	Symbol	Min.	Max.	Units
Supply Voltage	V_{DD}	1.3	4.4	V
Operating Ambient Temperature	T_A	-40	+85	℃
Load Capacitance	C_L		50	pF
Input Rise and Fall Times			5	ns
Input Pulse Voltages		0.2*V_{DD}	0.8*V_{DD}	V
Input and Output timing ref. Voltage		0.3*V_{DD}	0.7*V_{DD}	V

1) Output Hi-Z is defined as the point where data is no longer driven.

Real Time Clock Module with I²C Bus

AB-RTCMC-32.768kHz-AIGZ-S7

Pb | **RoHS/RoHS II compliant**

3.2 x 1.5 x 0.8 mm

Capacitance

Parameters [1] [2]	Symbol	Min.	Max.	Units
Input Capacitance	C_{IN}		7	pF
Output Capacitance	C_{OUT} [3]		10	pF
Low-pass filter input time constant (SDA and SCL)	t_{LP}		50	ns

1) Effective capacitance measured with power supply at 3.6 V; sampled only, not 100% tested.
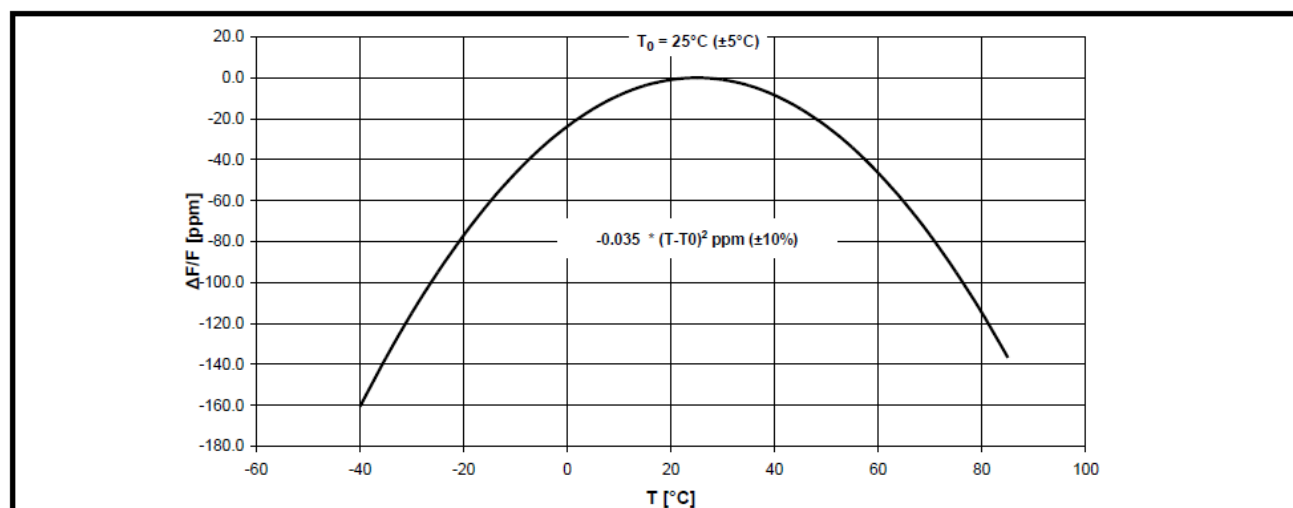
2) At 25°C, f = 1MHz.

3) Outputs deselected.

Frequency Characteristics

T_{amb} = +25°C; f_{OSC} = 32.768 kHz

Parameters	Symbol	Conditions	Min.		Max.	Units
Frequency Accuracy	$\Delta f/f$	T_{amb} = +25°C	-20		+20	ppm
Frequency vs. Temperature Characteristics	$\Delta f /T_{OPR}$	T_{OPR}= -40 to +85°C	\multicolumn{2}{c}{$-0.035^{ppm}/°C^2 * (T_{OPR} - T_0)^2$ (±10%)}		ppm
Turnover Temperature	T_O		+20	+25	+30	°C
Aging (first year)	$\Delta f/f$	T_{amb} = +25°C	-3		+3	ppm
Oscillator Start-up Voltage	V_{Start}	≤10 seconds	1.5			V
Oscillator Start-up Time	T_{Start}	V_{DD} = 3.0V			1	s
CLKOUT Duty Cycle		F_{CLKOUT} = 32.768kHz T_{amb}= +25°C	40	50	60	%

➢ **FREQUENCY VS. TEMPERATURE CHARACTERISTICS**

ABRACON LLC

Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.28.2018

ABRACON IS
ISO9001-2015
CERTIFIED

Static Characteristics

Valid for T_{amb}= -40°C to +85°C; V_{DD}= 1.3 V to 4.4 V (except where noted)

Parameters	Symbol	Conditions	Min.	Typ.	Max.	Units
Supply Voltage	V_{DD} [1]	Clock	1.0		4.4	V
		I²C Bus (400kHz)	1.3		4.4	V
Supply Current SCL=400kHz No Load	I_{DD1}	V_{DD} = 4.4V			100	µA
		V_{DD} = 3.6V		50	70	µA
		V_{DD} = 3.0V		35		µA
		V_{DD} = 2.5V		30		µA
		V_{DD} = 2.0V		20		µA
Supply Current (standby) SCL = 0Hz; CLKOUT off All inputs $\geq V_{DD}$-0.2V $\leq V_{SS}$+0.2V	I_{DD2}	V_{DD} = 4.4V			950	nA
		V_{DD} = 3.6V		375	700	nA
		V_{DD} = 3.0V at 25°C		350	500	nA
		V_{DD} = 2.0V at 25°C		310	450	nA
		V_{DD} = 1.0V at 25°C		270	400	nA
LOW Level Input Voltage	V_{IL}		-0.2		$0.3*V_{DD}$	V
HIGH Level Input Voltage	V_{IH}		$0.7*V_{DD}$		V_{DD}+0.3	V
HIGH Level Output Voltage	V_{OH}	V_{DD}=4.4V, I_{OH} = -1.0mA (push-pull)	2.4			V
LOW Level Output Voltage	V_{OL}	V_{DD}=4.4V, I_{OL} = 3.0mA (SDA)			0.4	V
		V_{CC}=4.4V, I_{OL} = 1.0mA (SQW, $\overline{INT}$)			0.4	
Pull-up Supply voltage (open drain)		$\overline{INT}$			4.4	V
Input Leakage Current	I_{LI}	$0V \leq V_{IN} \leq V_{DD}$	-1		+1	µA
Output Leakage Current	I_{LO}	$0V \leq V_{OUT} \leq V_{DD}$	-1		+1	µA

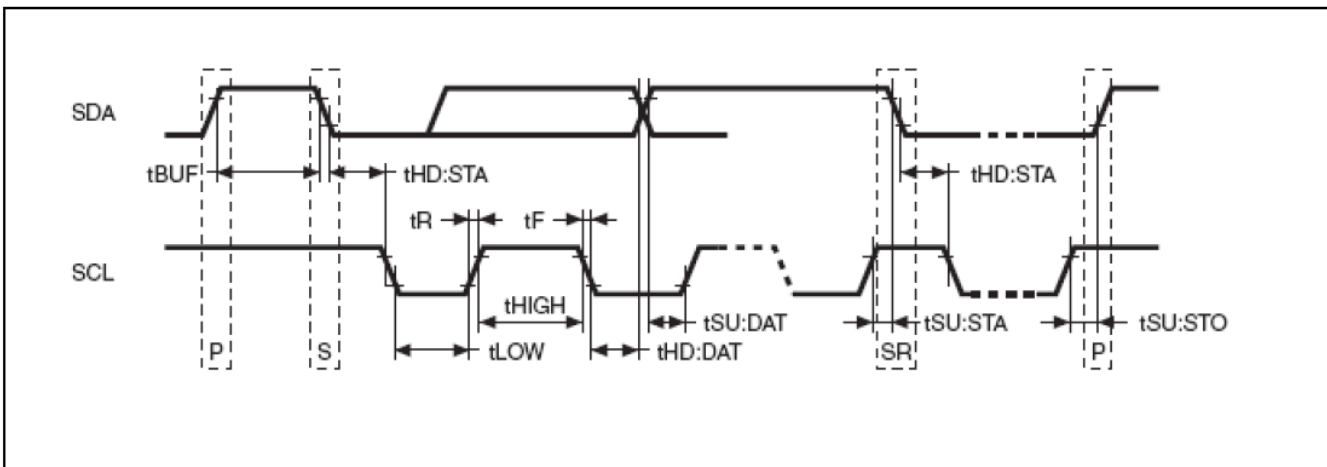1. Oscillator startup guaranteed down to 1.5 V only.

I²C Interface Dynamic Characteristics

Valid for T_{amb}= -40°C to +85°C; V_{DD}= 1.3 V to 4.4 V (except where noted)

Parameters	Symbol	Min.	Typ.	Max.	Units
SCL Clock Frequency	f_{SCL}	0		400	kHz
START Condition Setup Time (only relevant for a repeated start condition)	$t_{SU:STA}$	600			ns
START Condition Hold Time (after this period the first clock pulse is generated)	$t_{HD:STA}$	600			ns
Data Setup Time [1]	$t_{SU:DAT}$	100			ns
Data Hold Time	$t_{HD:DAT}$	0			µs
STOP Condition Setup Time	$t_{SU:STO}$	600			ns
Bus Free Time between STOP and START condition	t_{BUF}	1.3			µs
SCL "LOW time"	t_{LOW}	1.3			µs
SCL "HIGH time"	t_{HIGH}	600			ns
SCL and SDA Rise Time	t_R			300	ns
SCL and SDA Fall Time	t_F			300	ns
Watchdog Output Pulse Width	t_{REC}	96		98	ms

1. Transmitter must internally provide a hold time to bridge the undefined region (300 ns max) of the falling edge of SCL.

I²C Interface Timing Characteristics

Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.28.2018

ABRACON IS
ISO9001-2015
CERTIFIED

Real Time Clock Module with I²C Bus

AB-RTCMC-32.768kHz-AIGZ-S7

RoHS/RoHS II compliant

3.2 x 1.5 x 0.8 mm

▷ PART IDENTIFICATIONS:

AB-RTCMC-32.768 kHz-AIGZ-S7- ☐

Packaging
Blank: Bulk
T: 1000pcs/reel

▷ OUTLINE DIMENSIONS:
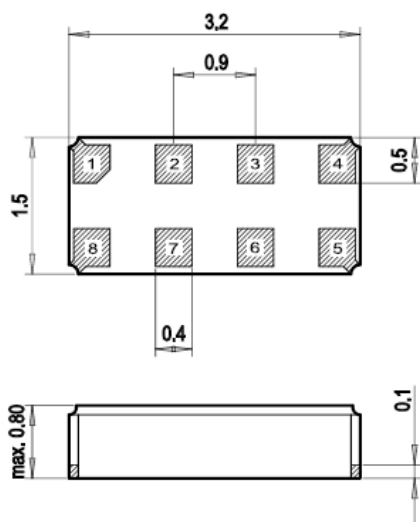
Recommended Land Pattern
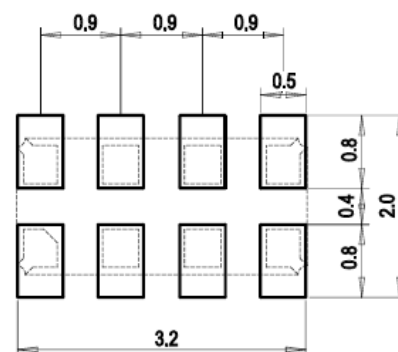
Dimensions: mm

▷ PIN DESCRIPTIONS:

Pin No.	Pin Name	Function
1	SDA	Serial data; open-drain; requires pull-up resistor
2	CLKOUT	Clock Output
3	V_{SS}	Ground
4	NC	Not connected
5	V_{DD}	Power Supply voltage
6	$\overline{INT}$	Interrupt output; open-drain; requires pull-up resistor; active low
7	NC	Not connected
8	SCL	Serial clock input; requires pull-up resistor

ABRACON LLC

➢ BLOCK DIAGRAM:
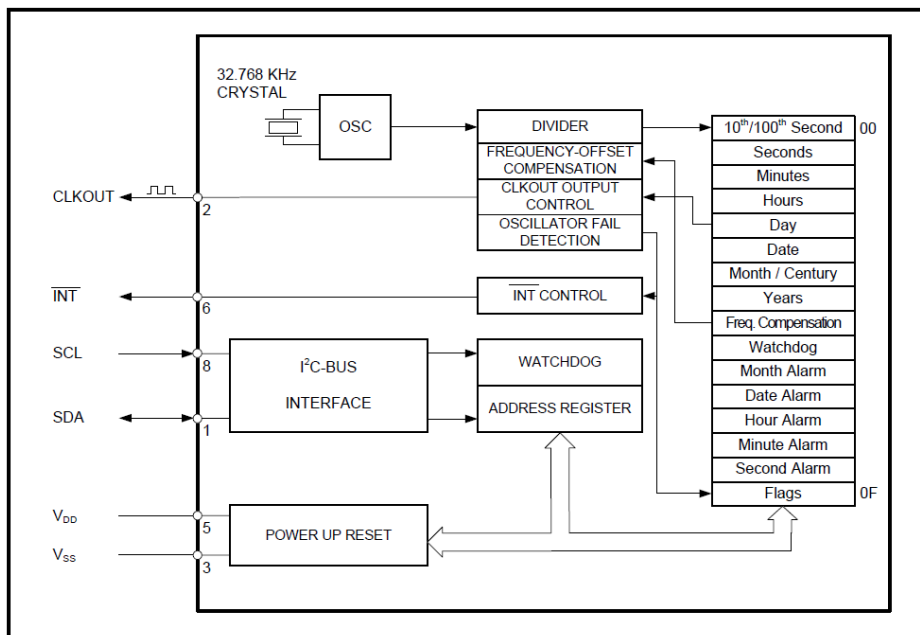
➢ RECOMMENDED REFLOW PROFILE:

Maximum Reflow Conditions in accordance with IPC/JEDEC J-STD-020C "Pb-free"
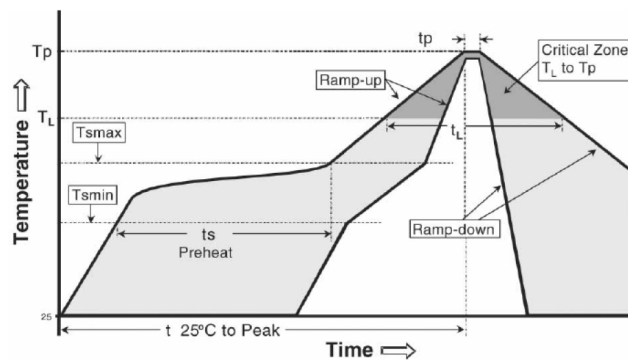
| Temperature	Conditions	Units
Average Ramp-up Rate (T$_{Smax}$ to T$_P$)	3℃/second max	℃/s
Ramp Down Rate (T$_{cool}$)	6℃/second max	℃/s
Time 25℃ to Peak Temperature (T$_{to-peak}$)	8 minutes max	m
Preheat		
Temperature Min (T$_{Smin}$)	150	℃
Temperature Max (T$_{Smax}$)	200	℃
Time Ts$_{min}$ to Ts$_{max}$ (ts)	60 ~ 180	sec
Time Above Liquidus		
Temperature Liquidus (T$_L$)	217	℃
Time above Liquidus (t$_L$)	60 ~150	sec
Peak Temperature		
Peak Temperature (T$_P$)	260	℃
Time within 5℃ of Peak Temperature (t$_P$)	20 ~ 40	sec

ABRACON LLC

Phone: 512-371-6159 | Fax: 512-351-8858
For terms and conditions of sales, please visit:
www.abracon.com

REVISED: 11.28.2018

ABRACON IS
ISO9001-2015
CERTIFIED

➢ TAPE & REEL:

T = 1000pcs/reel

Dimension: mm