




## THE MAIN CYCLES


### CYCLE 1 – HIGH TRAFFIC

- 2x W880XX 2K (without sanding – within 3-6 hours)
- Sanding
- 1x W880XX 2K
- Cycle compliant with the UNI 11622-1 standard Appendix D achieved class: High
- Cycle suitable for high frequency wood flooring (Gyms, discotheques, public places etc.)



### CYCLE 2 – MEDIUM TRAFFIC

- 2x W980XX 2K (without sanding – within 3-6 hours)
- Sanding
- 1x W980XX 2K
- Cycle compliant with the UNI 11622-1 standard Appendix D achieved class: Medium



## OTHER CYCLES

- It is possible to use the above-mentioned products in the one-pack version or in combination with one of the primers of our Parquet line
- Before executing any not certified cycle, we recommend you consult our technical laboratory



Azienda con sistema di gestione per la Qualità certificato secondo la norma UNI EN ISO 9001:2015




Verinlegno S.p.A.  
Via Galvani, 7 - 51010 Massa e Cozzile (PT) - Zona Industriale - Italy -  
Tel. +39 0572 92711 - Fax +39 0572 773608 - Partita IVA 00230480477 - info@verinlegno.it

[www.verinlegno.it](http://www.verinlegno.it)

INNOVATION, RESEARCH, DEVELOPMENT

## PARQUET LINE

A LINE OF WATER-BASED PRODUCTS  
FOR WOOD FLOORING



+ PERFORMANCE  
– ENVIRONMENTAL IMPACT

[www.verinlegno.it](http://www.verinlegno.it)








It is a full range of professional products, from dyes to finishing, which ensures top level performances for any use: from home places, where the aesthetical effect prevails, to sport halls and public places (as high traffic) where large usable net areas, hardness and elasticity are essential.

- CATAS certified performances
- Full range (from dyes to finishing)
- Non-slip performance and UV protection thanks to our specific auxiliary products
- Low opacity effect
- Excellent aesthetical result

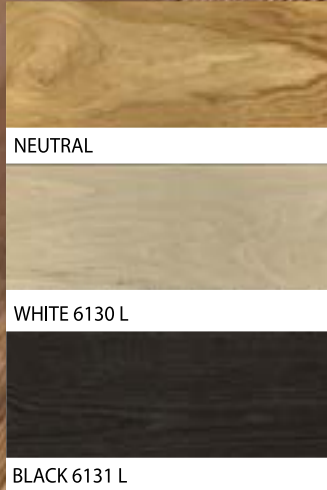

DYES		
C510N	COLOROIL NEUTRO	Transparent oily based vehicle for the formulation of hydro dyes. It is possible to paint it using our series R900 – PC Idro Serie or C850 – Col. CMI Serie.
C510XX	COLOROIL VARI COLORI	Oily based water-soluble dyes ready to be used to paint the wood flooring. Available in 15 different colours applicable as wipe on, using a brush, a roller and with an oil-spreaders or with a short pile paint roller; use a single brush floor machine, remove the excess with a cloth.

PRIMERS		
W890	IDROFOND PARQUET TX	One and two pack water-soluble acrylic primer with a high solid content and a quick drying.
W870	IDROFOND PARQUET TONALIZZANTE	One pack water-soluble primer enhancing treatment for wood flooring, suitable when you want to obtain an effect like the cycle with a solvent based painting.

FINISH PRIMERS		
W980XX	IDROMAT 150	One and two pack acrylic-based water-soluble finish primer water transparent with an extreme elasticity, hardness, and abrasive resistance. It is possible to apply this product as finish with W890 and W870 primers. Available with an opacity between 10 and 70 gloss.
W880XX	IDROMAT 350	One or two pack water-soluble base polyurethan finish primer with extreme resistances, suitable for places with remarkable stresses and with a high foot traffic. Available with an opacity between 10 and 70 gloss.
Both these products are available in the NATURE version with 3 gloss, and it is possible to catalyse up to 5% with W410 AQUALINK to improve their resistances (Pot life > 24H); suitable for automatic system, too.		

AUXILIARY ITEMS		
RLA0632	ADDITIVO ININGIALLENTE 632A	Additive to be added in the proportion of 1-2% whenever it is necessary to increase the wood protection against sun irradiation.
RLE03943	ANTISLIP	Additive to be used if it is necessary to increase the friction in compliance with the safety regulations into force.
PLE05705	DILUENTE LIVELLANTE IDRO	Retardant thinner to be used if it is necessary to delay drying and to improve levelling. Add at 5% at the most.
PLE04288	DILUENTE LAVAGGIO PER PRODOTTI IDRO	Specific thinner to clean working equipment.