


Dual Diaphragm Pump

1.5" / 40mm Ball Valve



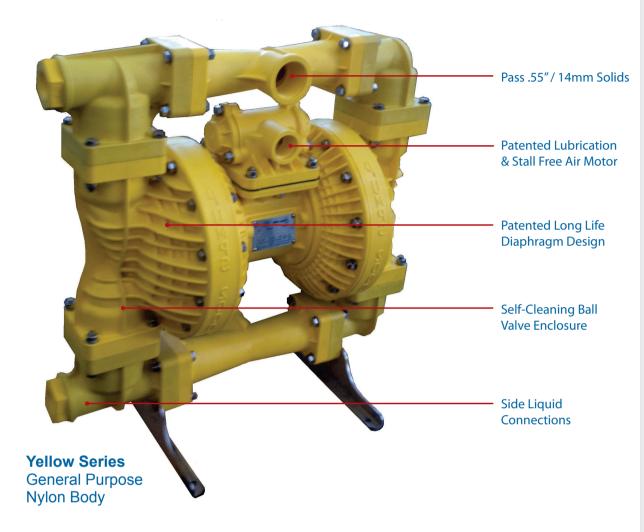

Red Series FRASplas Body-Fire Retardant Antistatic Construction -Safe for Explosive Environments ATEX M1 Rating




Ebony Series
Noryl BodyCorrosive
Resistant
Internals- For
Acids And Other
Hazardous
Liquids.

Features / Benefits

- Patented long life diaphragm & self-cleaning valve
- Low air consumption
- True lube-free & stall-free air motor: less sensitive to abrasive particles in the air supply and no oil emissions in the exhaust air
- Low weight due to light weight plastic & aeronautical design approach. No need for metal pumps
- Anti-icing: not affected by moisture in air line

- Large solids handling
- High suction lift
- Longer lasting air motor due to unique design and modular components that eliminate the need to replace the entire motor when worn.
- Conductive plastic (FRASplas) pumps are safe for explosive environments. Rated and certified to ATEX M1
- Low noise level


Dual Diaphragm 1.5" / 40mm Pump

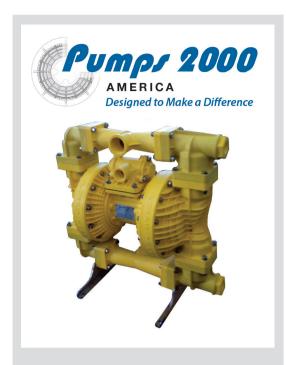

Ball Valve

"Pumps 2000" air operated dual diaphragm pumps were specifically designed for harsh mining duties and are guaranteed to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. Suitable for pumping applications in all industries.

Performance Curve

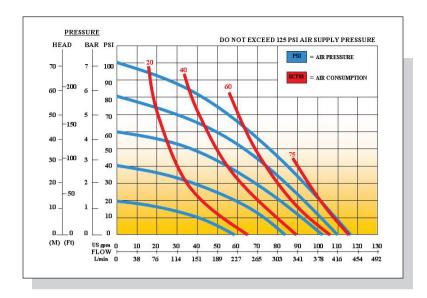

AIR PRESSURE:	Tested at 100 psi (Not to exceed 125 psi)
FLOW RATE:	0-117 gpm / 443 lpm
FLUID CONNECTION:	1 1/2" (Internal Thread)
AIR INLET PORT:	1/2" (Internal Thread)
EXHAUST PORT:	3/4" (Internal Thread)
DELIVERY PRESSURE:	Tested to 87 psi
SUCTION PRESSURE:	Tested to 19' / 5.8m dry and 30' / 9m wet
PARTICLE SIZE:	.55" / 14mm Spherical
PUMP WEIGHT:	From 43 lbs / 19.5kg







