IB Math Analysis and Approaches (HL)

Extended Essay

May 2024 Session

The Mathematics Techniques of Camera Calibration

Research Question: What are the various strategies and mathematical techniques employed in camera calibration to develop precise and accurate camera models?

Word Count: 3097 words

Contents

1   Introduction

Camera calibration, also known as camera resectioning, is the process of determining the intrinsic and extrinsic parameters of a camera. The intrinsic parameters deal with the camera's internal characteristics, while the extrinsic parameters describe its position and orientation in the world. The knowledge of the accurate values of these values parameters are essential, as it enables us to create a mathematical model which describes how a camera projects 3D points from a scene onto the 2D image it captures. The importance of a well-calibrated camera becomes very apparent in photogrammetric applications, where precise measurements of 3-dimensional physical objects are derived from photographic images.

Photogrammetry is the science of obtaining accurate measurements of 3-dimensional physical objects through photographic imagery. Photogrammetry was first employed by Prussian architect Albrecht Meydenbauer in the 1860s, who used photogrammetric techniques to create some of the most detailed topographic plans and elevations drawings[1]. Today, photogrammetric techniques are used in a multitude of applications spanning diverse fields, including but not limited to: 3D-model generation, computer vision, topographical mapping, medical imaging, and forensic analysis.

While camera calibration is essential in ensuring the accuracy of photogrammetric applications, it itself also relies on these very same photogrammetric techniques in order to estimate these parameters. In essence, the developments of photogrammetry and camera calibration are closely intertwined, underscoring the essential relationship between photogrammetry and camera calibration.

1.1   Problem Statement

While manufacturers of cameras often report parameters of cameras, such as the nominal focal length and pixel sizes of their camera sensor, these figures are typically approximations which can vary from camera to camera, particularly in consumer-grade cameras. As such, the use of these estimates by manufacturers are unsuitable in developing camera models for

---

[1]Joerg Albertz, "A Look Back; 140 Years of Photogrammetry," *Journal of the American Society for Photogrammetry and Remote Sensing* 73, no. 5 (May 2007): 1, accessed September 9, 2023, `https://www.asprs.org/wp-content/uploads/pers/2007journal/may/lookback.pdf`.

applications requiring high accuracy. Combined with the potential for manufacturing defects as well as unknown lens distortion coefficients further necessitates the need for a reliable method for determining the parameters of a camera.

Camera calibration emerges as the answer to these problems, allowing us to create very accurate models for the camera as well as generate estimates for its parameters. As such, it is important that we understand the mathematical techniques use in camera calibration, and why they find applications across many real-world applications.

2   Approach

There are many techniques one could take to calibrate a camera,

2.1   Camera Model

A camera model is a projection model which approximates the function of a camera by describing a mathematical relationship between points in 3D space and its projection onto the sensor grid of the camera. In order to construct such a model, we must first understand the general workings of a camera.

The modern lens camera is highly sophisticated, built with an array of complex mechanisms and a wide range of features such as zoom and autofocus. However, we only need to focus on its three principal elements critical to image projection: the lens, the aperture, and the sensor grid (CCD).

- **Lens** – Focuses incoming light rays and projects it onto the sensor grid. Modern cameras have compound lenses (lenses made up of several lens elements) in order to minimize undesired effects such as aberration, blurriness, and distortion.

- **Aperture** – Controls the amount of light that reaches the sensor. By adjusting the aperture size, the exposure and depth of field can be modified.

- **Sensor Grid** – Captures incoming light rays and converts this information into pixels on an image.
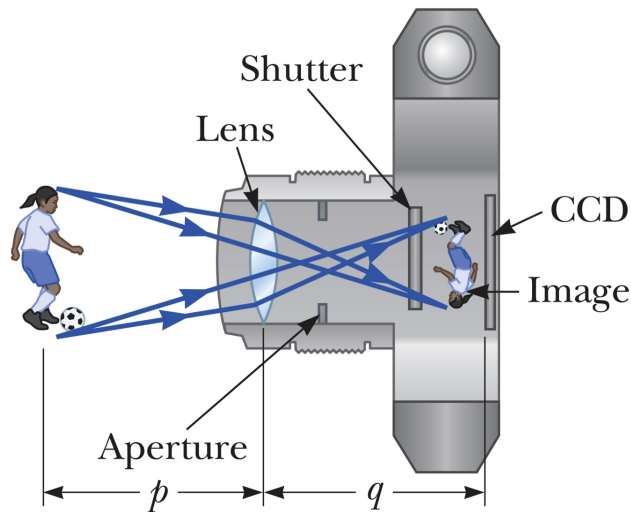
Figure 2.1: Lens camera. Adapted from John Colton, "Physics 123 Lecture 30 Warm-up Questions," BYU Physics and Astronomy, November 5, 2012, accessed October 17, 2023, `https://physics.byu.edu/faculty/colton/docs/phy123-fall12/jitt30a.html`.

However, it is impossible to construct a model which is both simple and exact for the lens cameras, as the behavior of lenses are very complex. As such, it is mathematically convenient to approximate the camera as a pinhole camera. In doing so, we ignore lens distortion, but it distills the behavior of a camera to its most fundamental and essential dynamics: the projection of points in 3D space onto the flat 2D image plane.

2.1.1   Pinhole Camera Model

A pinhole camera is a simple camera without a lens. It instead relies on the use of a tiny hole as the aperture of the camera, and light rays pass through the hole, projecting an inverted image onto the image plane. The pinhole camera model is based on the pinhole camera, however it goes further by making the assumption that the aperture is infinitely small. This means that any incoming light ray would only travel in straight lines, going through the pinhole mapping to one singular point on the image plane.
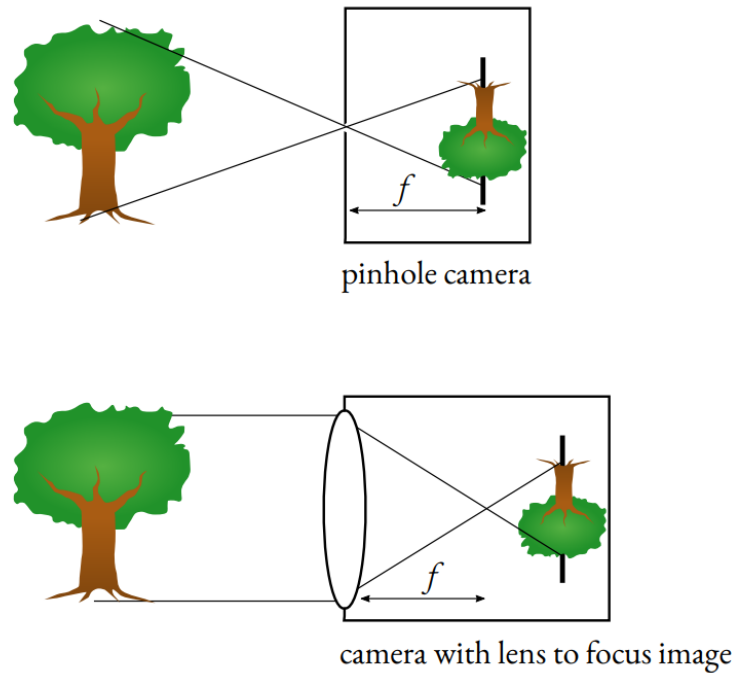
Figure 2.2: Difference between a pinhole camera and a lens camera. Adapted from Hoàng-Ân Lê, "Camera Model: Intrinsic Parameters," July 30, 2018, accessed October 14, 2023, `https://lhoangan.github.io/camera-params/`.

If necessary, one could reintroduce distortion and shear terms in order to minimize the error, but this is often not needed for low to medium precision applications, as the distortion of modern lenses are already minimal. As such, its ease of use has led it to become one of the most frequently employed camera models in the field of camera calibration.

2.2   Calibration Object

The calibration object is an object with known dimensions and features which is often used in camera calibration to

Calibration objects can be constructed in many ways, and they can be separated into different categories based the dimension of the calibration object[2].

- **3D object based calibration** – Performed by using a calibration object whose geometry is known to very high precision. Typically, the calibration object consists

---

[2]Zhengyou Zhang, "Camera Calibration," May 2007, accessed October 10, 2023, `https://people.cs.rutgers.edu/elgammal/classes/cs534/lectures/CameraCalibration-book-chapter.pdf`.

of 2 or 3 orthogonal planes, although a plane whose precise translation is known may also be used, which also yields 3D reference points[3]. Using 3D objects is typically preferred, as it yields the highest accuracy[4], and the mathematics required is also the least.

- **2D plane-based calibration** – The most common technique is known as Zhang's method, and it requires a planar object (often a checkerboard pattern), and various pictures of this plane are taken at different orientations[5]. Knowledge of the translation of the plane is not necessary. Due to its easier setup and good accuracy, it is the best choice in most situations. In fact, the most commonly used camera vision programming library, `OpenCV`, is geared towards this type of calibration.

- **1D line-based calibration** – Typically requires analyzing more than three photographs with straight lines which are not parallel with each other[6].

One can also calibrate cameras without a calibration object, using featuring tracking of objects in the scene to estimate camera parameters. This process is often referred to as self-calibration or auto-calibration. However, this is less preferable, as it involves a lot of estimation of parameters, which not only means that it is a more mathematically complex problem, it may not be able to achieve the accuracy of calibration using known calibration patterns[7]. As such, it is typically the only chosen when pre-calibration is impossible.

For this paper, I will focus on calibration using a 3D calibration object, because the mathematics behind it is simpler, and many of the techniques used in 3D-based calibration are

---

[3]Zhang, "Camera Calibration."

[4]Ibid.

[5]Zhengyou Zhang, "A Flexible New Technique for Camera Calibration," *IEEE Transactions on Pattern Analysis and Machine Intelligence* 22, no. 11 (November 2000): 1330–1334, accessed October 1, 2023, `http://ieeexplore.ieee.org/document/888718/`, 10.1109/34.888718.

[6]Xiuqin Chu, Fangming Hu, and Yushan Li, "Line-Based Camera Calibration," ed. Yue Hao et al., ed. David Hutchison et al., in *Computational Intelligence and Security*, vol. 3801 (Berlin, Heidelberg: Springer Berlin Heidelberg, 2005), accessed December 21, 2023, `http://link.springer.com/10.1007/11596448_150`, 10.1007/11596448_150.

[7]Zhang, "Camera Calibration."
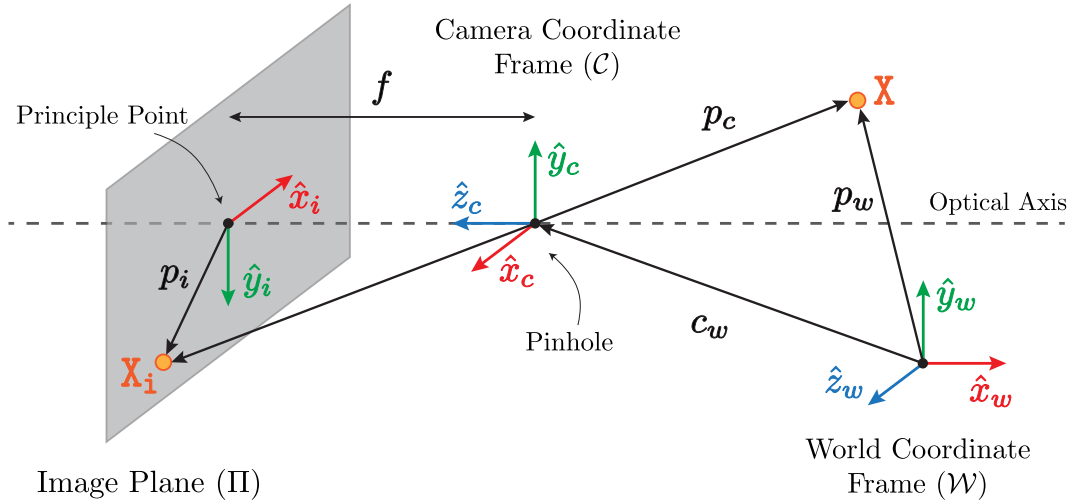
3   Constructing the Pinhole Camera Model

Figure 3.1: Pinhole camera model.

The construction of the pinhole camera model involves defining the relationships between the 3D world, the pinhole camera, and the resulting 2D image. To reflect these 4 different frames of reference, all of which :

- **World Coordinate Frame ($\mathcal{W}$).** Represents the 3D space of the scene being photographed, with respect to an origin which may be arbitrary and depends on the conventions chosen. Objects that are in the scene are defined with respect to this coordinate frame.

- **Camera Coordinate Frame ($\mathcal{C}$).** Represents the 3D space of the scene being photographed, but with respect to the pinhole (aperture) of the camera.

- **Image Coordinate Frame (Π)**. 2D plane representing the image sensor plane of the camera. The origin is the principle point of the image sensor, where the optical axis intersects the image plane.

- **Pixel Coordinate Frame**. 2D plane representing the position of pixels on the image sensor. The discrete version of the image coordinate frame, where c

The optical axis of a camera is an imaginary line which passes through the center of the aperture of the camera.
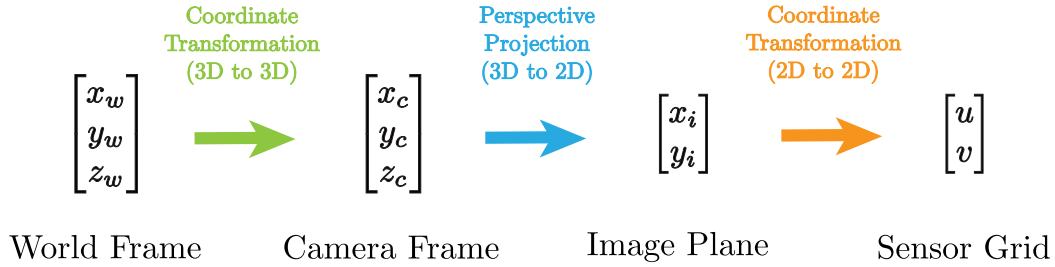
Figure 3.2: Coordinate transformations.

3.1   Intrinsic Parameters

Intrinsic parameters describe the internal characteristics of the camera. In other words, it dictates how in the 3D space are projected onto the image plane, i.e. the relationship between the position of the point X to its projection on the image plane.

Figure 3.3: Perspective projection of the point X onto the image plane Π.

When a straight line is drawn from X to its projection X_i through the aperture, it intersects

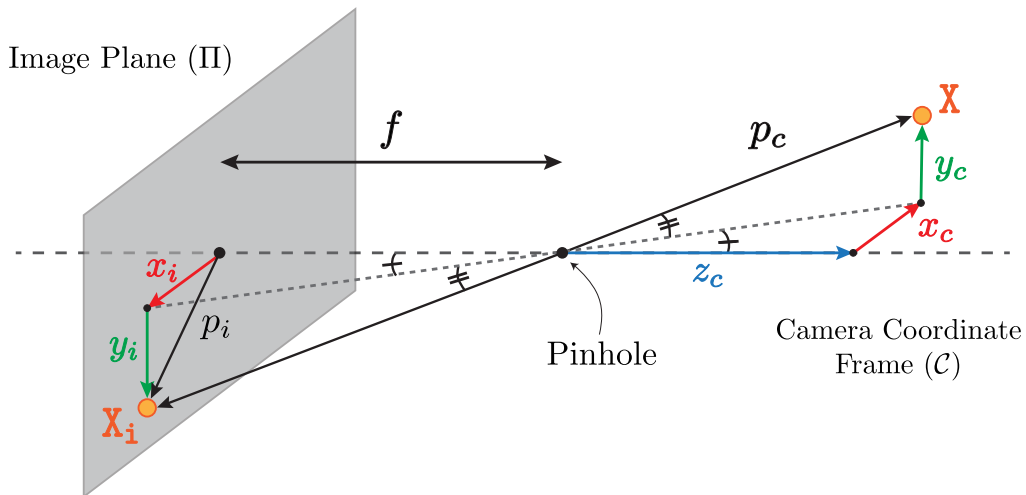the optical axis. Deconstructing this intersection in the x and y direction, pairs of similar triangles are formed, which relates x_i to x_c and y_i to y_c.
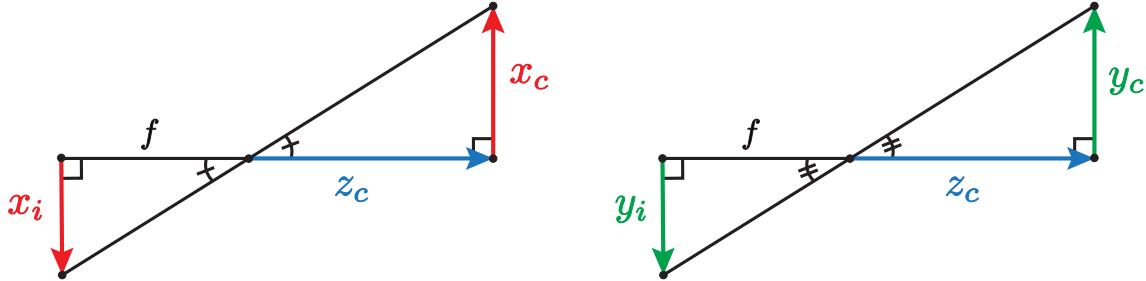

Figure 3.4: Similar triangles formed by perspective projection, which relate x_i to x_c and y_i to y_c.

$$\frac{x_i}{f} = \frac{x_c}{z_c} \quad \Longrightarrow \quad x_i = f\frac{x_c}{z_c} \tag{3.1a}$$

$$\frac{y_i}{f} = \frac{y_c}{z_c} \quad \Longrightarrow \quad y_i = f\frac{y_c}{z_c} \tag{3.1b}$$

Once the coordinates of the point projection, (x_i, y_i), is known, we then need to convert it to actual pixel position of the point on the image, (u, v). Pixel coordinates are measured in pixels, from the left-hand corner of the image. This is the convention that is typically followed in computer graphics. As such, there will be an offset in pixels, (c_x, c_y), which represents the optical center of the image (i.e. the point at which the optical axis intersects the image plane). Additionally, the relationship between (x_i, y_i) and (u, v) is proportional, but they scale at different rates, as (x_i, y_i) can be measured using any unit measurement, and can have negative and decimal values. On the other hand, (u,v) are measured in discrete pixel value, which can be different sizes depending on the camera used. As such, we define scaling factors, m_x and m_y, which represent the pixel density of the image sensor in the x and y axes of the image sensor plane respectively.
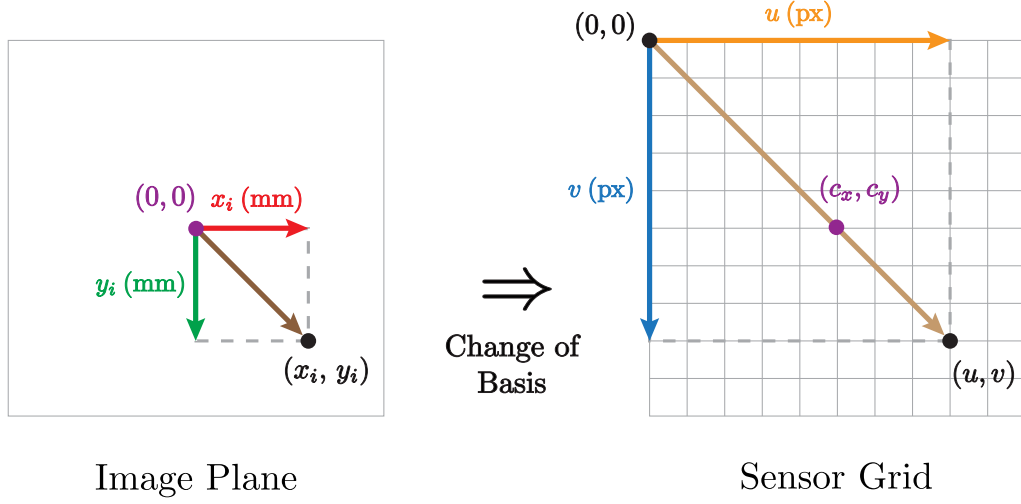
Figure 3.5: Conversion from image plane coordinates to sensor grid coordinates

Putting all the ideas above together, we can construct a set of linear parametric equations relating the pixel coordinates to their image coordinates thus:

$$u = m_x x_i + c_x$$

$$v = m_y y_i + c_y$$

where $u, v \in \mathbb{Z}_*^+$. Replacing x_i and y_i for the result we obtained from equations 3.1a and 3.1b, we get:

$$u = m_x f \frac{x_c}{z_c} + c_x$$

$$v = m_y f \frac{y_c}{z_c} + c_y$$

This gives us a direct relationship between camera coordinates and their corresponding pixel coordinates. Since m_x, m_y, and f are all unknowns, we can combine the products $m_x f$ and $m_y f$ into to f_x and f_y respectively. Under this new scheme, we define f_x and f_y as the

horizontal and vertical focal lengths of camera.

$$u = f_x \frac{x_c}{z_c} + c_x \tag{3.2}$$

$$v = f_y \frac{y_c}{z_c} + c_y \tag{3.3}$$

Multiply both sides of the equations by z_c.

$$z_c u = f_x x_c + z_c c_x$$

$$z_c v = f_y y_c + z_c c_y$$

Doing so allows us to express the relationship as a matrix transformation using **homogenous coordinates**[8], by letting $\widetilde{w} = z_c$.

$$\begin{bmatrix} z_c u \\ z_c v \\ z_c \end{bmatrix} = a \begin{bmatrix} f_x x_c + z_c c_x \\ f_y y_c + z_c c_y \\ z_c \end{bmatrix} = a \underbrace{\begin{bmatrix} f_x & 0 & c_x \\ 0 & f_y & c_y \\ 0 & 0 & 1 \end{bmatrix}}_{K} \begin{bmatrix} x_c \\ y_c \\ z_c \end{bmatrix} , \ a \in \mathbb{R}; a \neq 0 \tag{3.5}$$

This can be represented simply with:

$$\widetilde{p}_i = aK\, p_c \, , \ a \in \mathbb{R}; a \neq 0 \tag{3.6}$$

In this case, K is what is known as the **calibration matrix**. It is a matrix transformation which maps a point represented in the camera coordinate frame to the coordinates of their projection onto the sensor plane.

3.2   Extrinsic Parameters

Extrinsic parameters describe the orientation of the camera. As such, they describe the relationship between the position of a point in the world coordinate frame and its coordinates in camera coordinates.

---

[8]See Appendix A.

There are two possible types of movement affecting the orientation of the camera: rotation and translation. The rotation of the camera can be described using a 3×3 square matrix:

$$R = \begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix} \tag{3.7}$$

where:

- Row 1: Unit vector representing $\hat{x}_c$ after rotation.

- Row 2: Unit vector representing $\hat{y}_c$ after rotation.

- Row 3: Unit vector representing $\hat{z}_c$ after rotation.

R is an orthonormal matrix, because the row and column vectors of R have to be orthogonal. Orthonormality is important because it ensures that the scale of vectors do not change (meaning that determinant of R has to be 1) and that the orthogonality between vectors are maintained.
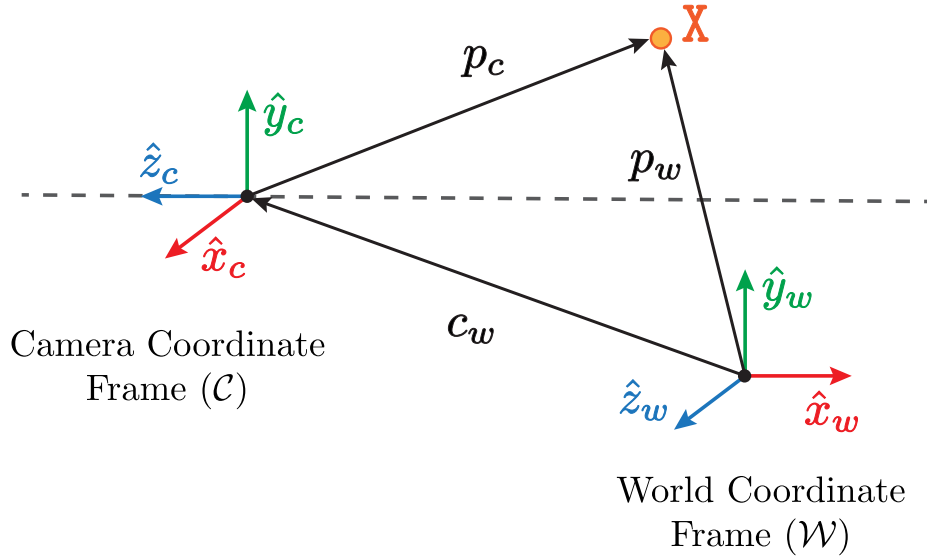

Figure 3.6: Coordinate transformation of X from the world coordinate frame to the camera coordinate frame.

From Figure 3.6, we can see that the naive approach to finding the position vector of the point in $\mathcal{C}$ is equal to the position vector of the point in $\mathcal{W}$ minus the position vector of the camera c_w. However, the camera can be facing in other directions, and we account for this rotation by including a rotational matrix in the equation. Thus:

$$p_c = R\,(p_w - c_w)$$

$$= R\,p_w - R\,c_w \tag{3.8}$$

Since the position of the camera c_w is constant, we let $t = -R\,c_w$, and t represents the translation of the camera from the origin.

$$p_c = R\,p_w + t \tag{3.9}$$

This can be equivalently written as thus:

$$
\begin{bmatrix} x_c \\ y_c \\ z_c \end{bmatrix}
=
\begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix}
\begin{bmatrix} x_w \\ y_w \\ z_w \end{bmatrix}
+
\begin{bmatrix} t_x \\ t_y \\ t_z \end{bmatrix}
$$

We can then combine R and t into an augmented matrix, $[R\,|\,t]$, by expressing p_w in homogenous coordinates.

$$
\begin{bmatrix} x_c \\ y_c \\ z_c \end{bmatrix}
=
\underbrace{\begin{bmatrix} r_{11} & r_{12} & r_{13} & t_x \\ r_{21} & r_{22} & r_{23} & t_y \\ r_{31} & r_{32} & r_{33} & t_z \end{bmatrix}}_{[R\,|\,t]}
\begin{bmatrix} x_w \\ y_w \\ z_w \\ 1 \end{bmatrix}
\tag{3.10}
$$

Thus, we arrive at the final equation:

$$p_c = [R\,|\,t]\,\widetilde{p}_w \tag{3.11}$$

4   Projection Matrix

When we combine the equation for the intrinsic transformation, $\widetilde{p}_i = aK\,p_c$ for $a \in \mathbb{R}$ and $a \neq 0$ (eq. 3.6), with the equation for the extrinsic transformation, $p_c = [R\,|\,t]\,\widetilde{p}_w$ (eq. 3.11), we obtain:

$$\widetilde{p}_i = aK\,[R\,|\,t]\,\widetilde{p}_w\,,\ a \in \mathbb{R}; a \neq 0 \tag{4.1}$$

This single equation encapsulates the relationship between the world coordinates and its corresponding pixel coordinates. We can then further simplify our camera model by defining a new matrix, P, which is equivalent to the product $K\,[R\,|\,t]$. Since K is a 3×3 matrix and $[R\,|\,t]$ is a 3×4 matrix, the matrix product $K[R\,|\,t]$ yields a 3×4 matrix.

$$\underbrace{\begin{bmatrix} p_{11} & p_{12} & p_{13} & p_{14} \\ p_{21} & p_{22} & p_{23} & p_{24} \\ p_{31} & p_{32} & p_{33} & p_{34} \end{bmatrix}}_{P} \equiv a \underbrace{\begin{bmatrix} f_x & 0 & c_x \\ 0 & f_y & c_y \\ 0 & 0 & 1 \end{bmatrix}}_{K} \underbrace{\begin{bmatrix} r_{11} & r_{12} & r_{13} & t_x \\ r_{21} & r_{22} & r_{23} & t_y \\ r_{31} & r_{32} & r_{33} & t_z \end{bmatrix}}_{[R\,|\,t]} \tag{4.2}$$

Replacing P for $K\,[R\,|\,t]$ in equation 4.1, we obtain:

$$\widetilde{p}_i = aP\,\widetilde{p}_w \tag{4.3}$$

Equivalently:

$$\begin{bmatrix} \widetilde{u}_n \\ \widetilde{v}_n \\ \widetilde{w}_n \end{bmatrix} = a \begin{bmatrix} p_{11} & p_{12} & p_{13} & p_{14} \\ p_{21} & p_{22} & p_{23} & p_{24} \\ p_{31} & p_{32} & p_{33} & p_{34} \end{bmatrix} \begin{bmatrix} x_w^{(n)} \\ y_w^{(n)} \\ z_w^{(n)} \\ 1 \end{bmatrix} \tag{4.4}$$

The implications of this equation is very important, as it means that a 3×4 matrix is sufficient in describing the relationship between a point in the world coordinate frame to its projection onto the image plane in pixel coordinates.

4.1   Solving for the Projection Matrix

Now, we need to devise a way to solve for the projection matrix. Since we know that the projection matrix describes relationship between a point and their projection, we can go backwards and solve for the projection matrix given a set of points and their corresponding projections. Rewriting the matrix equation 4.3 as a set of parametric equations and letting $a = 1$ for now, we obtain:

$$\widetilde{u}_n = p_{11}x_w^{(n)} + p_{12}y_w^{(n)} + p_{13}z_w^{(n)} + p_{14}$$

$$\widetilde{v}_n = p_{21}x_w^{(n)} + p_{22}y_w^{(n)} + p_{23}z_w^{(n)} + p_{24}$$

$$\widetilde{w}_n = p_{31}x_w^{(n)} + p_{32}y_w^{(n)} + p_{33}z_w^{(n)} + p_{34}$$

We convert the set of equations back to their inhomogeneous form by recognizing the fact that $u_n = \widetilde{u}_n/\widetilde{w}_n$ and $v_n = \widetilde{v}_n/\widetilde{w}_n$.

$$u_n = \frac{p_{11}x_w^{(n)} + p_{12}y_w^{(n)} + p_{13}z_w^{(n)} + p_{14}}{p_{31}x_w^{(n)} + p_{32}y_w^{(n)} + p_{33}z_w^{(n)} + p_{34}}$$

$$v_n = \frac{p_{21}x_w^{(n)} + p_{22}y_w^{(n)} + p_{23}z_w^{(n)} + p_{24}}{p_{31}x_w^{(n)} + p_{32}y_w^{(n)} + p_{33}z_w^{(n)} + p_{34}}$$

For both equations, multiply both sides by the denominator.

$$u_n(p_{31}x_w^{(n)} + p_{32}y_w^{(n)} + p_{33}z_w^{(n)} + p_{34}) = p_{11}x_w^{(n)} + p_{12}y_w^{(n)} + p_{13}z_w^{(n)} + p_{14}$$

$$v_n(p_{31}x_w^{(n)} + p_{32}y_w^{(n)} + p_{33}z_w^{(n)} + p_{34}) = p_{21}x_w^{(n)} + p_{22}y_w^{(n)} + p_{23}z_w^{(n)} + p_{24}$$

Bringing all the terms onto one side:

$$0 = p_{11}x_w^{(n)} + p_{12}y_w^{(n)} + p_{13}z_w^{(n)} + p_{14} - p_{31}u_nx_w^{(n)} - p_{32}u_ny_w^{(n)} - p_{33}u_nz_w^{(n)} - p_{34}u_n \qquad (4.5a)$$

$$0 = p_{21}x_w^{(n)} + p_{22}y_w^{(n)} + p_{23}z_w^{(n)} + p_{24} - p_{31}v_nx_w^{(n)} - p_{32}v_ny_w^{(n)} - p_{33}v_nz_w^{(n)} - p_{34}v_n \qquad (4.5b)$$

We then need to recognize the fact that this

$$
\begin{bmatrix} 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \\ 0 \end{bmatrix}
=
\underbrace{\begin{bmatrix}
x_w^{(1)} & y_w^{(1)} & z_w^{(1)} & 1 & 0 & 0 & 0 & 0 & -u_1 x_w^{(1)} & -u_1 y_w^{(1)} & -u_1 z_w^{(1)} & -u_1 \\
0 & 0 & 0 & 0 & x_w^{(1)} & y_w^{(1)} & z_w^{(1)} & 1 & -v_1 x_w^{(1)} & -v_1 y_w^{(1)} & -v_1 z_w^{(1)} & -v_1 \\
& & \vdots & & & & & & & \vdots & & \\
x_w^{(n)} & y_w^{(n)} & z_w^{(n)} & 1 & 0 & 0 & 0 & 0 & -u_n x_w^{(n)} & -u_n y_w^{(n)} & -u_n z_w^{(n)} & -u_n \\
0 & 0 & 0 & 0 & x_w^{(n)} & y_w^{(n)} & z_w^{(n)} & 1 & -v_n x_w^{(n)} & -v_n y_w^{(n)} & -v_n z_w^{(n)} & -v_n
\end{bmatrix}}_{G}
\underbrace{\begin{bmatrix} p_{11} \\ p_{12} \\ p_{13} \\ p_{14} \\ p_{21} \\ p_{22} \\ p_{23} \\ p_{24} \\ p_{31} \\ p_{32} \\ p_{33} \\ p_{34} \end{bmatrix}}_{p} \quad (4.6)
$$

where G is a $2n \times 12$ matrix, $n \in \mathbb{Z}^+$, and p is the matrix vectorization of P. This system has 12 degrees of freedom, and since each point yields two equations, a minimum of 6 sets of points and their corresponding image projections are necessary in order to solve the system. When using 6 correspondences, a unique solution can be obtained using classical approaches, such as using **Gaussian elimination**. But since we want to minimize uncertainty and achieve a solution which is as accurate as possible, we want to use as many correspondences as possible.

When using more the 6 correspondences, we have more equations than unknowns. Such systems are *overdetermined*, and generally have no solutions[9]. However, we can optimize to obtain the "best approximate solution" using a method such as the **least-squares method**.

4.2   Constrained Least-Squares Solution

First, we must clarify what a "best approximate solution" is.

---

[9]Gareth Williams, "Overdetermined Systems of Linear Equations," *The American Mathematical Monthly* 97, no. 6 (June 1990): 511–513, accessed November 1, 2023, https://www.jstor.org/stable/2323837, JSTOR: 2323837.

Definition 4.1 *X Let A be an $m \times n$ matrix and let b be a vector in $\mathbb{R}^m$. A **least-squares solution** of the matrix equation $Ax = b$ is a vector $\widehat{x}$ such that:*

$$\operatorname{dist}(b, A\widehat{x}) \leq \operatorname{dist}(b, Ax) \qquad \forall x \in \mathbb{R}^m$$

The term least-squares solution comes from the fact that $\operatorname{dist}(b, A\widehat{x}) = \|b - A\widehat{x}\|$ is the square root of the sum of the squares of the entries of the vector $b - A\widehat{x}$. In other words, a least-squares solution solve a matrix equation as closely as possible by minimizing the sum of the squares of the differences between the entries of $A\widehat{x}$ and b.[10]

Returning to our specific problem, we can apply least-squares method by minimizing $\|Gp\|^2$. We minimize $\|Gp\|^2$ because we recognize that minimizing the square of the magnitude is equivalent to minimizing the magnitude itself, and that for a given vector v, it is easier to compute $\|v\|^2$ instead of $\|v\|$ since it eliminates the square root:

$$\|v\|^2 = \left(\sqrt{v_1^2 + v_2^2 + \cdots v_n^2} \right)^2 = v_1^2 + v_2^2 + \cdots v_n^2 = \begin{bmatrix} v_1 & v_2 & \cdots & v_n \end{bmatrix} \begin{bmatrix} v_1 \\ v_2 \\ \vdots \\ v_n \end{bmatrix} = v^\mathsf{T} v$$

v^T represents the *transpose* of v, i.e. swapping its rows and columns, transforming a row vector into a column vector or vice versa.

However, we need to further constrain the problem since the projection matrix P is applied onto homogenous coordinates, where the property holds that multiplying the homogenous coordinate of a point by a non-zero scalar still represents the same point[11]. This means that there is an infinite amount of solutions, because once we have found a valid solution for P, we can always multiply P by a non-zero scalar k and still yield a valid solution, i.e. $P \equiv kP$. As such, any solution for P is only defined to a certain scale factor k. To mitigate this, we

---

[10]Dan Margalit, Joseph Rabinoff, and Ben Williams, "7.5 The Method of Least Squares," in *Interactive Linear Algebra* , accessed December 25, 2023, `https://personal.math.ubc.ca/~tbjw/ila/ila.pdf`.
[11]See Appendix A.

arbitrarily set the condition that $\|p\|^2$ must equal 1. Thus:

$$\underset{p}{\text{minimize}} \ \|Gp\|^2 \ \text{subject to} \ \|p\|^2 = 1$$

Equivalently:

$$\underset{p}{\text{minimize}} \ \left(p^\mathsf{T} G^\mathsf{T} Gp\right) \ \text{subject to} \ p^\mathsf{T} p = 1 \tag{4.7}$$

The *Lagrangian*[12] of this equation is

$$\mathcal{L}(p, \lambda) = p^\mathsf{T} G^\mathsf{T} Gp - \lambda \left(p^\mathsf{T} p - 1\right) \tag{4.8}$$

where $\lambda \in \mathbb{R}$ is the *Lagrange multiplier*. Since p is minimized when $\mathcal{L}$ is minimized, we want to find the absolute minimum of $\mathcal{L}$. As such, we need to locate the critical points of $\mathcal{L}$. To find these points, we want to look for values of p and λ where all partial derivatives (denoted using ∂) of the Lagrangian are zero. Thus:

$$\frac{\partial \mathcal{L}}{\partial p} \overset{\text{set}}{=} 0$$

$$\Rightarrow \frac{\partial}{\partial p} \left[p^\mathsf{T} G^\mathsf{T} Gp - \lambda \left(p^\mathsf{T} p - 1\right)\right] = 0$$

$$\Rightarrow 2G^\mathsf{T} Gp - 2\lambda p = 0$$

$$\Rightarrow G^\mathsf{T} Gp = \lambda p \tag{4.9}$$

This equation is in fact in the form of the eigenvalue problem for $G^\mathsf{T} G$. Potential solutions for p are eigenvectors that satisfy equation 4.9, with the scalar $\lambda \in \mathbb{R}$ as the eigenvalue. Since this is a minimization problem, the minimized eigenvector p is the one which has the smallest λ.[13]

---

[12]Benyamin Ghojogh, Fakhri Karray, and Mark Crowley, "Eigenvalue and Generalized Eigenvalue Problems: Tutorial," Comment: 8 pages, Tutorial paper. v2, v3: Added additional information, May 20, 2023, 2, accessed October 21, 2023, `http://arxiv.org/abs/1903.11240`, arXiv: 1903.11240 `[cs, stat]`.

[13]Ibid.

5   Extracting Parameters

Once we have solved for the projection for the projection matrix P, we can then extract the intrinsic and extrinsic parameters. We know that

An important property worth noting is that K is an *upper triangular matrix*. It is a special kind of square matrix with all of its non-zero entries above the main diagonal. This is an important property which we will exploit when extracting the K from the projection matrix in section 4.

$$P = K \, [\, R \mid t \,]$$

$$= K \, [\, R \mid \, - Rc_w \,]$$

$$= [\, KR \mid \, - KRc_w \,] \tag{5.1}$$

$$\tag{5.2}$$

5.1   RQ Decomposition

$$Q = \begin{bmatrix} p_{11} & p_{12} & p_{13} \\ p_{21} & p_{22} & p_{23} \\ p_{31} & p_{32} & p_{33} \end{bmatrix} = \underbrace{\begin{bmatrix} f_x & 0 & c_x \\ 0 & f_y & c_y \\ 0 & 0 & 1 \end{bmatrix}}_{K} \underbrace{\begin{bmatrix} r_{11} & r_{12} & r_{13} \\ r_{21} & r_{22} & r_{23} \\ r_{31} & r_{32} & r_{33} \end{bmatrix}}_{R}$$

Since K is in the form of an *upper right triangular matrix* and R is an *orthonormal matrix*, we can find unique solutions for K and R using a method called *RQ decomposition*.

RQ decomposition is a technique which allows us to uniquely decompose a matrix A into a product $A = RQ$, where R is an upper

Since

5.2   Extracting the Translation Vector

$$-Qc_w = \begin{bmatrix} p_{14} \\ p_{24} \\ p_{34} \end{bmatrix}$$

$$\Rightarrow c_w = -Q^{-1} \begin{bmatrix} p_{14} \\ p_{24} \\ p_{34} \end{bmatrix} \tag{5.3}$$

5.3   Extracting Orientation as Angles

When constructing the extrinsic matrix in section 3.2, we defined the rotation of the camera as a 3×3 matrix, where the

We can represent the rotation in terms of *Tait-Bryan Angles*, where the rotation is represented as 3 elemental rotations about each of the principle axes.

$$R_x(\alpha) = \begin{bmatrix} 1 & 0 & 0 \\ 0 & \cos(\alpha) & -\sin(\alpha) \\ 0 & \sin(\alpha) & \cos(\alpha) \end{bmatrix} \tag{5.4a}$$

$$R_y(\beta) = \begin{bmatrix} \cos(\beta) & 0 & -\sin(\beta) \\ 0 & 1 & 0 \\ -\sin(\beta) & 0 & -\cos(\beta) \end{bmatrix} \tag{5.4b}$$

$$R_z(\gamma) = \begin{bmatrix} \cos(\gamma) & -\sin(\gamma) & 0 \\ \sin(\gamma) & \cos(\gamma) & 0 \\ 0 & 0 & 1 \end{bmatrix} \tag{5.4c}$$

$$R \equiv R_z(\gamma)R_y(\beta)R_x(\alpha) \tag{5.5}$$

$$R = \begin{bmatrix} 0 & \cos(\alpha) & -\sin(\alpha) \\ 0 & \sin(\alpha) & \cos(\alpha) \\ 1 & 0 & 0 \end{bmatrix} \begin{bmatrix} \cos(\beta) & 0 & -\sin(\beta) \\ 0 & 1 & 0 \\ -\sin(\beta) & 0 & -\cos(\beta) \end{bmatrix} \begin{bmatrix} \cos(\gamma) & -\sin(\gamma) & 0 \\ \sin(\gamma) & \cos(\gamma) & 0 \\ 0 & 0 & 1 \end{bmatrix}$$

$$= \begin{bmatrix} \cos(\beta)\cos(\gamma) & \sin(\alpha)\sin(\beta)\cos(\gamma) - \cos(\alpha)\sin(\gamma) & \cos(\alpha)\sin(\beta)\cos(\gamma) + \sin(\alpha)\cos(\gamma) \\ \cos(\beta)\sin(\gamma) & \sin(\alpha)\sin(\beta)\sin(\gamma) + \cos(\alpha)\cos(\gamma) & \cos(\alpha)\sin(\beta)\sin(\gamma) - \sin(\alpha)\cos(\gamma) \\ -\sin(\beta) & \sin(\alpha)\cos(\beta) & \cos(\alpha)\cos(\beta) \end{bmatrix} \quad (5.6)$$

We have that

$$r_{31} = -\sin(\beta)$$
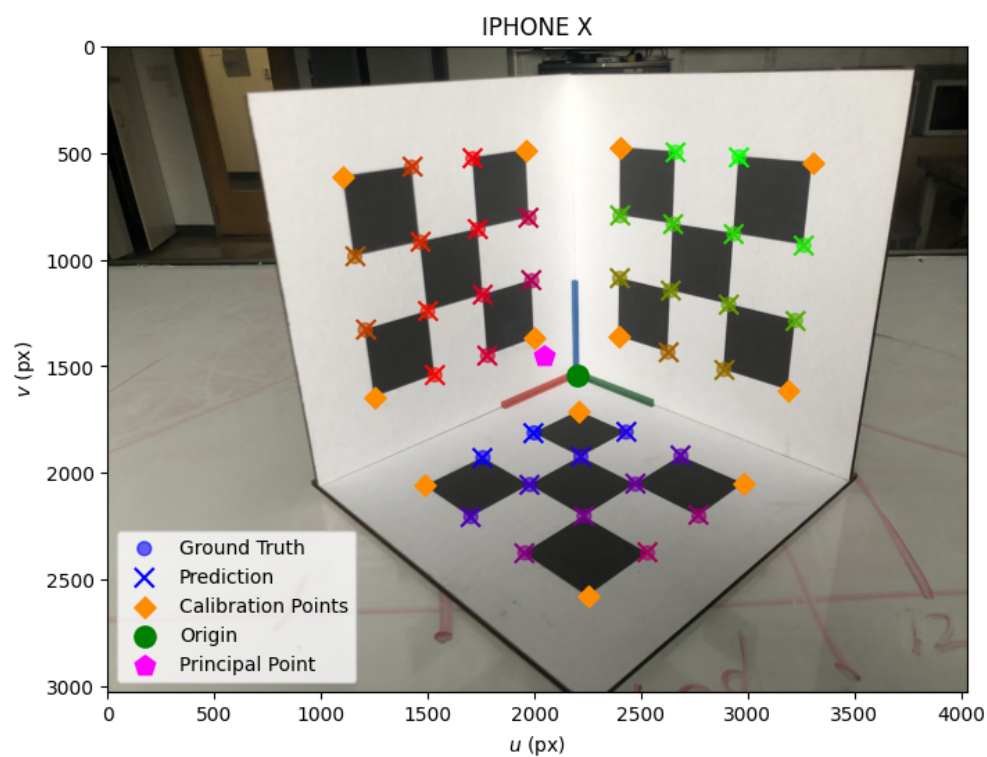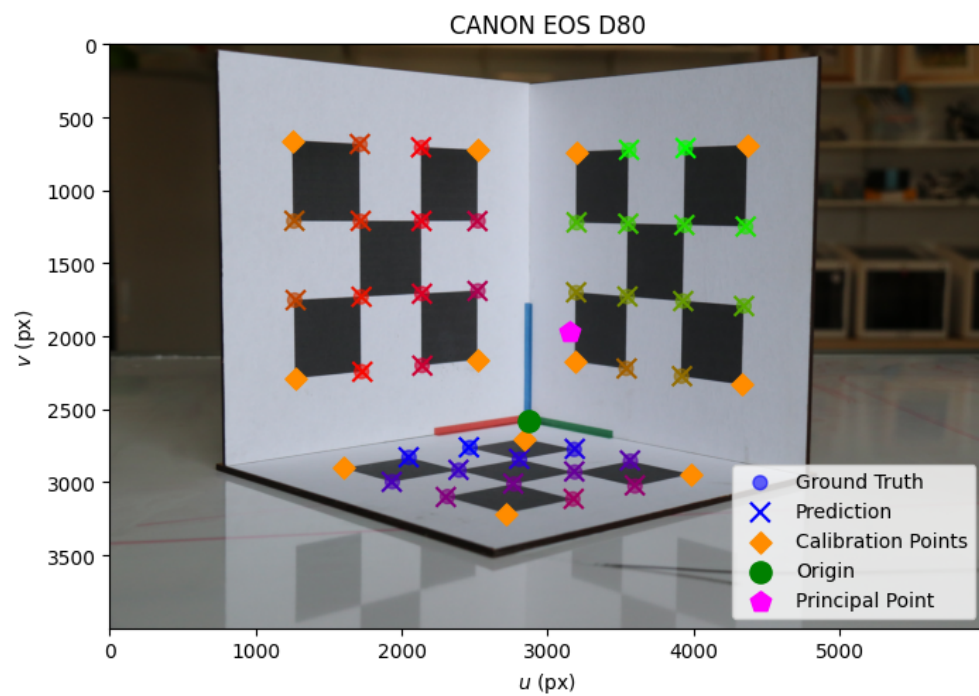
$$\Rightarrow \beta = \sin^{-1}(-r_{31}) \tag{5.7}$$
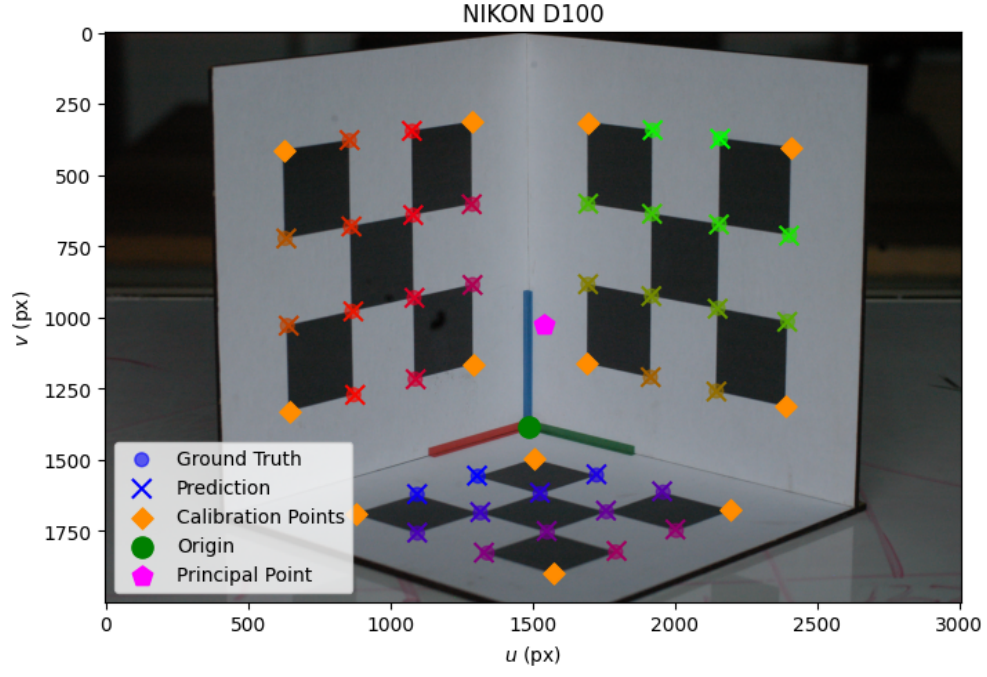
$$r_{32} = \sin(\alpha)\cos(\beta)$$

$$\Rightarrow \alpha = \sin^{-1}\left(\frac{r_{32}}{\cos(\beta)}\right) = \sin^{-1}\left(\frac{r_{32}}{\cos(\sin^{-1}(-r_{31}))}\right)$$
$$= \sin^{-1}\left(\frac{r_{32}}{\sqrt{1 - r_{31}^2}}\right) \tag{5.8}$$

$$r_{21} = \cos(\beta)\sin(\gamma)$$

$$\Rightarrow \gamma = \sin^{-1}\left(\frac{r_{21}}{\cos(\beta)}\right) = \sin^{-1}\left(\frac{r_{21}}{\cos(\sin^{-1}(-r_{31}))}\right)$$
$$= \sin^{-1}\left(\frac{r_{21}}{\sqrt{1 - r_{31}^2}}\right) \tag{5.9}$$

6   Experimental Validation

In an attempt to show that the model works, I created the program

CANON EOS D80

IPHONE X

NIKON D100

$$P = \begin{bmatrix} -2.5844 \times 10^{-3} & 1.7334 \times 10^{-3} & -4.6719 \times 10^{-4} & 6.0581 \times 10^{-1} \\ 4.8240 \times 10^{-4} & 4.4097 \times 10^{-4} & -3.1337 \times 10^{-3} & 7.9559 \times 10^{-1} \\ -3.3990 \times 10^{-7} & -3.1311 \times 10^{-7} & -2.8179 \times 10^{-7} & 4.1340 \times 10^{-4} \end{bmatrix}$$

		Canon EOS D80	IPhone X	Nikon D100
Focal Lengths	f_x	8404.1 px	3281.5 px	8144.4 px
	f_y	8387.9 px	3279.9 px	8142.6 px
Principal Point	c_x	3151.6 px	2043.0 px	1541.8 px
	c_y	1972.8 px	1453.1 px	1027.9 px
Tait-Bryan Angles	α	$-81.86°$	$-60.21°$	$-70.83°$
	β	$44.27°$	$38.72°$	$46.44°$
	γ	$4.97°$	$21.64°$	$13.89°$
Translation	t_x	494.8 mm	329.0 mm	840.3 mm
	t_y	537.6 mm	321.4 mm	766.0 mm
	t_z	128.3 mm	208.6 mm	317.2 mm
Reproj. Errors	μ_{max}	11.08 px	5.58 px	11.70 px
	μ_{avg}	3.56 px	2.55 px	2.81 px

Table 6.1: Intrinsic and Extrinsic Parameters calculated by `calicam`.

6.1   Validating Estimated Focal Length

Given that specification of cameras are readily available online, we can actually evaluate the accuracy of our calculated focal lengths. Assuming that the pixels are square, we estimate the focal lengths of our cameras to be the average of the horizontal and vertical focal lengths. Then, based on the manufacturer reported size of each individual pixel (known as the *pixel pitch*), we can convert our estimated focal length from pixels to millimeters.

	Calculated Focal Length [14]	Manufacturer Reported Focal Length	% Error
Canon EOS D80	$(8496\,\text{px})(3.73\,\mu\text{m/px}) \approx \boxed{31.7\,\text{mm}}$	$32\,\text{mm}$	$0.94\,\%$
IPhone X	$(3280\,\text{px})(1.22\,\mu\text{m/px}) \approx \boxed{4.00\,\text{mm}}$	$4\,\text{mm}$	–
Nikon D100	$(8143\,\text{px})(7.82\,\mu\text{m/px}) \approx \boxed{63.7\,\text{mm}}$	$55\,\text{mm}$	$15.6\,\%$

Table 6.2: Comparison of Calculated vs. Reported Focal Length.

Considering that the focal lengths reported by manufacturers are often only accurate to around $\pm 1\,\text{mm}$,[15] my results are very promising, with exception to the Nikon D100. However, this error is in fact a result of human error, as I forgot to turn off autofocus on the Nikon D100, and the zoom lens Nikon D100 altered the effective focal length.

7   Conclusion

From my rudimentary experimental validation, we can see that my devised method of camera calibration is very accurate, and despite its various limitations, such as fixed focal length and fixed locality, it serves as a proof of concept which excellently demonstrates the fundamental techniques behind camera calibration.

Acknowledgements

---

[14] Pixel pitches retrieved from `digicamdb.com`.

[15] WayneF, "Answer to 'Are Lenses Marked with the True Focal Length?'," Photography Stack Exchange, August 7, 2017, accessed December 3, 2023, `https://photo.stackexchange.com/a/91603`.

Bibliography

Albertz, Joerg. "A Look Back; 140 Years of Photogrammetry." *Journal of the American Society for Photogrammetry and Remote Sensing* 73, no. 5 (May 2007): 504–506. Accessed September 9, 2023. `https://www.asprs.org/wp-content/uploads/pers/2007journal/may/lookback.pdf`.

Chu, Xiuqin, Fangming Hu, and Yushan Li. "Line-Based Camera Calibration." Edited by Yue Hao, Jiming Liu, Yuping Wang, Yiu-ming Cheung, Hujun Yin, Licheng Jiao, Jianfeng Ma, and Yong-Chang Jiao. Edited by David Hutchison, Takeo Kanade, Josef Kittler, Jon M. Kleinberg, Friedemann Mattern, John C. Mitchell, Moni Naor, et al. In *Computational Intelligence and Security*, 1009–1014. Vol. 3801. Berlin, Heidelberg: Springer Berlin Heidelberg, 2005. Accessed December 21, 2023. `http://link.springer.com/10.1007/11596448_150`. 10.1007/11596448_150.

Colton, John. "Physics 123 Lecture 30 Warm-up Questions." BYU Physics and Astronomy, November 5, 2012. Accessed October 17, 2023. `https://physics.byu.edu/faculty/colton/docs/phy123-fall12/jitt30a.html`.

Ghojogh, Benyamin, Fakhri Karray, and Mark Crowley. "Eigenvalue and Generalized Eigenvalue Problems: Tutorial." Comment: 8 pages, Tutorial paper. v2, v3: Added additional information. May 20, 2023. Accessed October 21, 2023. `http://arxiv.org/abs/1903.11240`. arXiv: 1903.11240 [cs, stat].

Lê, Hoàng-Ân. "Camera Model: Intrinsic Parameters." July 30, 2018. Accessed October 14, 2023. `https://lhoangan.github.io/camera-params/`.

Margalit, Dan, Joseph Rabinoff, and Ben Williams. "7.5 The Method of Least Squares." In *Interactive Linear Algebra*, 411–432. Accessed December 25, 2023. `https://personal.math.ubc.ca/~tbjw/ila/ila.pdf`.

WayneF. "Answer to 'Are Lenses Marked with the True Focal Length?'" Photography Stack Exchange, August 7, 2017. Accessed December 3, 2023. `https://photo.stackexchange.com/a/91603`.

Williams, Gareth. "Overdetermined Systems of Linear Equations." *The American Mathematical Monthly* 97, no. 6 (June 1990): 511–513. Accessed November 1, 2023. `https://www.jstor.org/stable/2323837`. JSTOR: 2323837.

Zhang, Zhengyou. "A Flexible New Technique for Camera Calibration." *IEEE Transactions on Pattern Analysis and Machine Intelligence* 22, no. 11 (November 2000): 1330–1334. Accessed October 1, 2023. `http://ieeexplore.ieee.org/document/888718/`. `10.1109/34.888718`.

———. "Camera Calibration," May 2007. Accessed October 10, 2023. `https://people.cs.rutgers.edu/elgammal/classes/cs534/lectures/CameraCalibration-book-chapter.pdf`.

Appendix A   Homogenous Coordinates

The standard Cartesian coordinate system has long served as the foundation for representing points and vectors in Euclidean space. However, certain limitations arise when dealing with transformations, particularly translations and perspective projections, both of which are operations core to this paper. To overcome these challenges, homogenous coordinates are employed.

Definition A.1 *Given a point $(a_1, a_2, \cdots, a_n) \in \mathbb{R}^n$, it can be expressed in homogenous coordinates as $(\lambda a_1, \lambda a_2, \cdots, \lambda a_n, \lambda) \in \mathbb{R}^{n+1}$, where $\lambda \neq 0$ is a constant scale factor.*

In other words, we essentially extend the coordinate representation to include an extra dimension

$$
\begin{bmatrix} u \\ v \end{bmatrix} \sim \begin{bmatrix} u\widetilde{w} \\ v\widetilde{w} \\ \widetilde{w} \end{bmatrix} \equiv \begin{bmatrix} \widetilde{u} \\ \widetilde{v} \\ \widetilde{w} \end{bmatrix} \tag{A.1}
$$

One important property of homogenous coordinates is that if the homogenous coordinate of a point is multiplied by a non-zero scalar, the result represents the same point. i.e.

$$
\begin{bmatrix} \widetilde{u} \\ \widetilde{v} \\ \widetilde{w} \end{bmatrix} \equiv k \begin{bmatrix} \widetilde{u} \\ \widetilde{v} \\ \widetilde{w} \end{bmatrix} \qquad (k \neq 0) \tag{A.2}
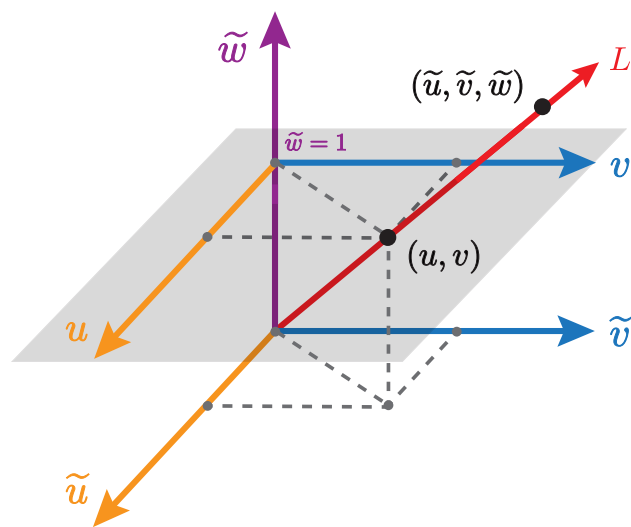$$

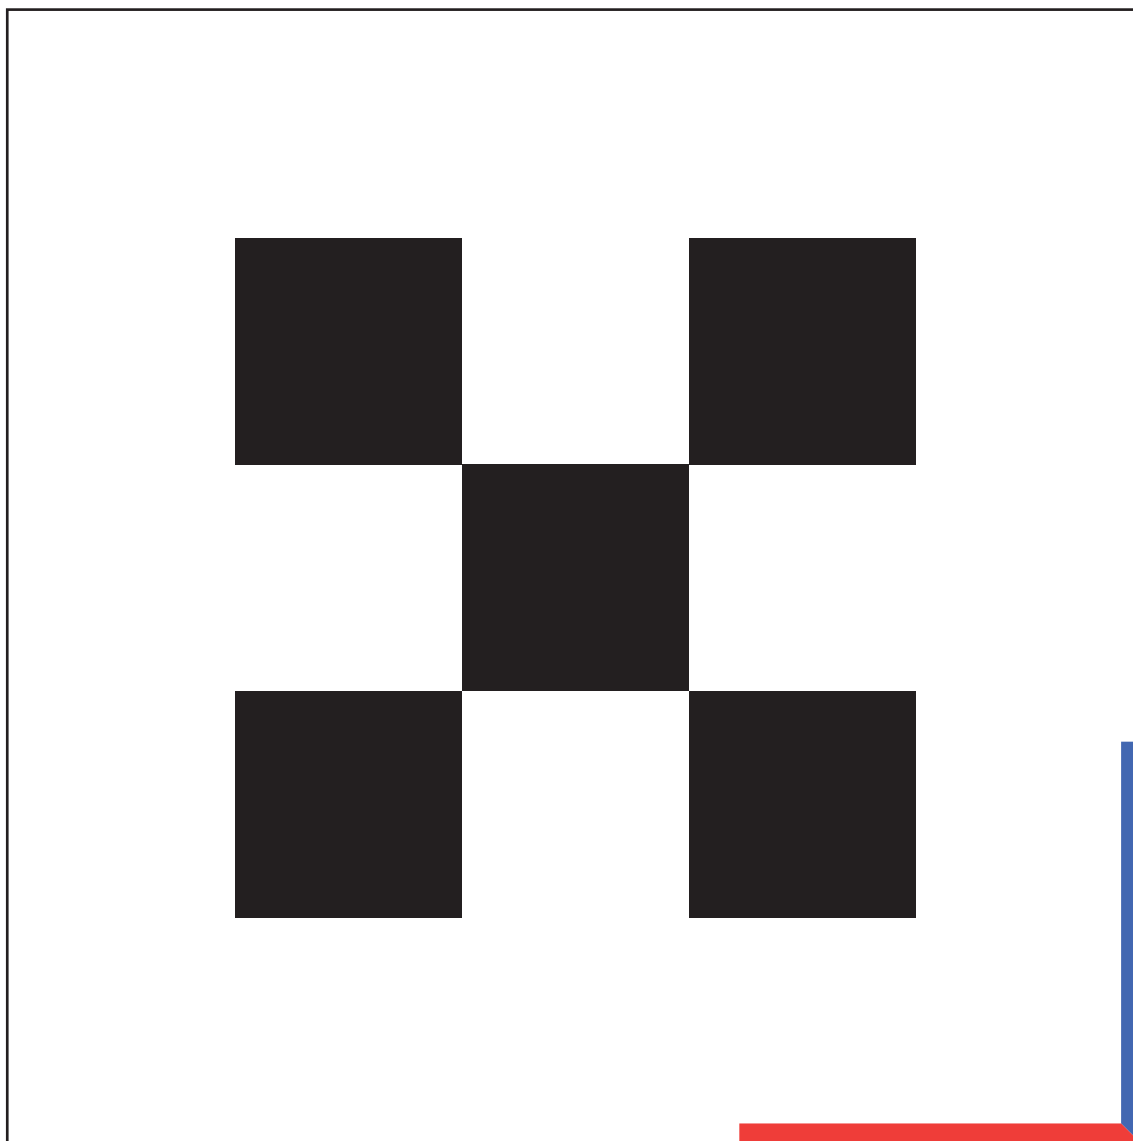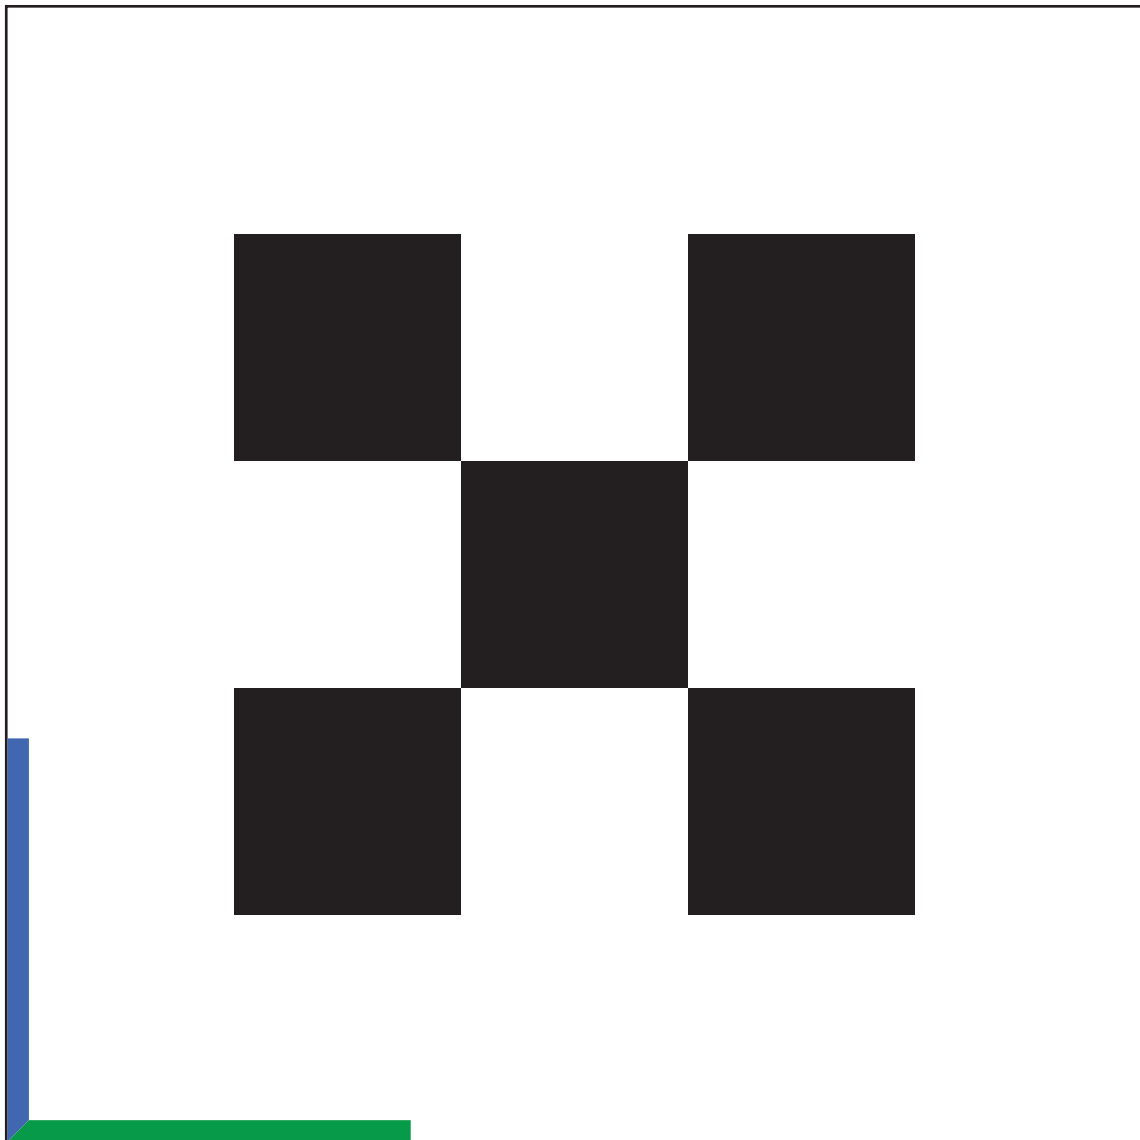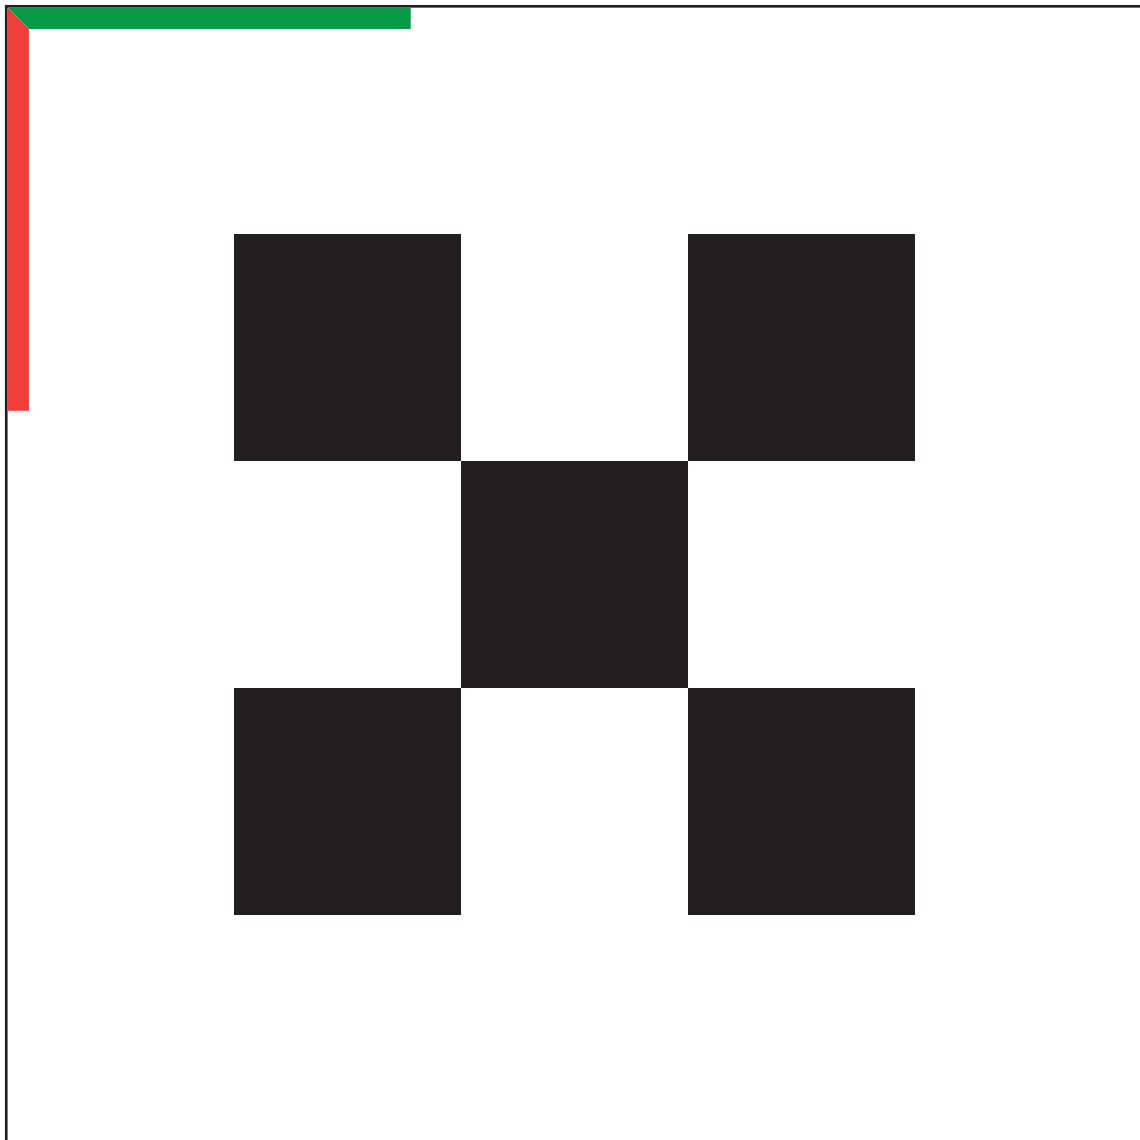**Figure A.1:** Homogenous coordinate system.

Appendix B   Calibration Object Panel Patterns

XZ Face

YZ Face

XY Face

Appendix C   Source Code

Structure

```
calicam
├── calicam
│   ├── __init__.py
│   ├── extract.py
│   ├── parser.py
│   ├── projection.py
│   └── vecs.py
└── run.py
```

Entry Point

run.py

```python
#!/usr/bin/env python3
import os
import sys
import numpy as np
import matplotlib.pyplot as plt
from argparse import ArgumentParser, RawDescriptionHelpFormatter

import calicam


def main():
    np.set_printoptions(precision=3, suppress=True)

    MAX_HELP_POSITION = 40

    parser = ArgumentParser(
        prog="calicam",
        description=(
            "Generates projection matrix and calculates intrinsic and extrinsic parameters.\n"
            "CSV inputs are in the format: x,y,z,u,v where 3D point = (x, y, z) and 2D point = (u,v)"),
        formatter_class=lambda prog: RawDescriptionHelpFormatter(prog, max_help_position=MAX_HELP_POSITION),
    )

    parser.add_argument("path", metavar="PATH", help="path to csv file with calibration points")
    parser.add_argument(
        "-d", "--data", metavar="DATA_PATH", help="path to csv file with model verification data")
    parser.add_argument(
        "-g", "--graph", nargs="?", const="", metavar="BKGD_IMG", help="generate graph")
    parser.add_argument("-t", "--title", metavar="TITLE", help="title of graph (ignored if `-g` is not
    ↪  passed)")
    parser.add_argument("-s", "--show", action="store_true", help="show graph (only necessary if `-o` is
    ↪  passed)")
    parser.add_argument("-o", "--out", metavar="GRAPH_PATH", help="graph output location ")
    parser.add_argument("--noprint", action="store_true", help="don't print output to terminal")

    args = parser.parse_args()

    output = []

    try:
        # GENERATE MODEL
        csv_path: str = args.path
```

```python
41
42          cali_world_coords, cali_image_coords = calicam.parse_data_from_csv(csv_path)
43          proj_matrix, cali_matrix, rot_matrix, (tx, ty, tz) = calicam.calibrate_camera(
44              cali_world_coords, cali_image_coords)
45
46          # origin
47          (ox, oy) = calicam.project_point(proj_matrix, (0.0, 0.0, 0.0))
48
49          # principal point, focal lengths
50          (cx, cy), (fx, fy) = calicam.extract_intrinsics(cali_matrix)
51
52          # tait-bryan angles
53          a, b, g = calicam.extract_orientation_zyx(rot_matrix)
54
55          output.append("\n" + "\n\n".join((
56              f"Projection Matrix: \n{proj_matrix}",
57              f"Calibration Matrix: \n{cali_matrix}",
58              f"Rotation Matrix: \n{rot_matrix}",
59              f"Focal Lengths: \n\tf_x = {fx:.2f} px \n\tf_y = {fy:.2f} px",
60              f"Principal Point: \n\tc_x = {cx:.2f} px \n\tc_y = {cy:.2f} px",
61              f"Translation: \n\tt_x = {tx:.2f} \n\tt_y = {ty:.2f} \n\tt_z = {tz:.2f}",
62              f"Orientation: \n\t\u03B1 = {a:.2f}° \n\t\u03B2 = {b:.2f}° \n\t\u03B3 = {g:.2f}°",
63          )))
64
65          # MODEL VALIDATION
66          data_path: str | None = args.data
67
68          if data_path is not None:
69              assert os.path.isfile(data_path), f"{data_path} does not exist."
70              assert data_path.endswith(".csv"), f'{data_path} does not end with the extension ".csv".'
71
72              data_world_coords, data_image_coords = calicam.parse_data_from_csv(data_path)
73
74              predicted_coords = [
75                  calicam.project_point(proj_matrix, world_coord) for world_coord in data_world_coords
76              ]
77              reproj_errs = [
78                  calicam.euclidean(actual_coord, reproj_coord)
79                  for actual_coord, reproj_coord in zip(data_image_coords, predicted_coords)
80              ]
81
82              max_err = max(reproj_errs)
83              avg_err = sum(reproj_errs) / len(reproj_errs)
84
85              output.append(
86                  f"\nReprojection Errors: \n\t\u03BC_max = {max_err:.3f} px \n\t\u03BC_avg = {avg_err:.3f}
                      ↪   px")
87
88          # OUTPUT
89          if not args.noprint:
90              print(*output, sep="\n")
91
92          # GRAPH
93          image_path: str | None = args.graph
94
95          if image_path is not None:
96              ax: plt.Axes
97              _, ax = plt.subplots(figsize=(8, 10))
98
99              plt.gca().invert_yaxis()
100
101              # image was provided
102              if image_path != "":
103                  assert os.path.isfile(image_path), f"{image_path} does not exist."
104                  assert args.data, "Path to data csv file must be provide using -d flag to produce graph."
105
106                  img = plt.imread(image_path,)
107                  ax.imshow(img, cmap='gray')
```

```python
108                        ax.autoscale(False)
109
110                   # graph data points and model points only if -d flag is specfied
111                   if data_path is not None:
112                       cmap = plt.cm.brg
113                       discrete_cmap = list(cmap(np.linspace(0, 1, len(data_image_coords))))
114
115                       # data points
116                       ax.scatter(
117                           *zip(*data_image_coords),
118                           label="Ground Truth",
119                           s=50,
120                           color=discrete_cmap,
121                           marker="o",
122                           alpha=0.6,
123                       )
124
125                       # predicted points
126                       ax.scatter(
127                           *zip(*predicted_coords),
128                           label="Prediction",
129                           s=100,
130                           color=discrete_cmap,
131                           marker="x",
132                       )
133
134                   # calibration points
135                   ax.scatter(
136                       *zip(*cali_image_coords),
137                       label="Calibration Points",
138                       s=60,
139                       marker="D",
140                       color="darkorange",
141                   )
142
143                   # origin point
144                   ax.scatter(ox, oy, label="Origin", s=120, marker="o", color="green")
145
146                   # principle point
147                   ax.scatter(cx, cy, label="Principal Point", s=120, marker="p", color="magenta")
148
149                   graph_title: str = args.title or image_path
150
151                   plt.gca().update({"title": graph_title, "xlabel": "$u$ (px)", "ylabel": "$v$ (px)"})
152                   plt.legend()
153
154                   out_path: str | None = args.out
155
156                   if out_path:
157                       plt.savefig(out_path, bbox_inches='tight')
158
159                   # show graph if -s flag was specified or if a save location was not specified
160                   if args.show or not out_path:
161                       plt.show()
162
163           except AssertionError as e:
164               parser.error(str(e))   # pass error to argparse
165
166           except KeyboardInterrupt:
167               print(f"\nKeyboardInterrupt")
168               sys.exit(1)
169
170           sys.exit(0)
171
172
173   if __name__ == "__main__":
174       main()
```

`calicam` Internal Library

calicam/parser.py

```python
import csv

from .vecs import *


def parse_data_from_csv(path: str) -> tuple[list[Vec3f], list[Vec2f]]:
    """
    Parses a csv and returns a list of 3D scene points and their corresonding
    2D image mappings.
    CSV format: x,y,z,u,v
    where 3D point = (x, y, z) and 2D point (u,v)
    """
    with open(path, "r") as f:
        reader = csv.reader(f, delimiter=",")

        world_coords = []
        image_coords = []
        for lno, line in enumerate(reader, start=1):
            assert len(line) == 5, f"Data on line {lno} in {path} is invalid."

            x, y, z, u, v = (float(s) for s in line)

            world_coords.append((x, y, z))
            image_coords.append((u, v))

    return world_coords, image_coords
```

calicam/projection.py

```python
import numpy as np
import scipy.sparse.linalg
from nptyping import Shape, Double

from .vecs import *

ProjMatrix = np.ndarray[Shape["3, 4"], Double]


def generate_estimation_matrix(world_coords: list[Vec3f], image_coords: list[Vec2f]) -> np.ndarray:
    """
    Generates an estimation matrix from list of 3D world coords and
    their corresponding pixel coord mappings
    """
    rows = []
    for (x, y, z), (u, v) in zip(world_coords, image_coords):
        rows.append([x, y, z, 1.0, 0.0, 0.0, 0.0, 0.0, -u * x, -u * y, -u * z, -u])
        rows.append([0.0, 0.0, 0.0, 0.0, x, y, z, 1.0, -v * x, -v * y, -v * z, -v])
    return np.array(rows)


def generate_proj_matrix(world_coords: list[Vec3f], image_coords: list[Vec2f]) -> tuple[ProjMatrix, float]:
    """
    Takes 3D calibration points their corresponding pixel coord mappings and
    returns the projection matrix as a 3x4 matrix
    """
    assert len(world_coords) == len(image_coords), \
        f"The number of world coordinates ({world_coords}) and image coordinates ({image_coords}) do not
        ↪  match."
```

```
29
30      assert len(world_coords) >= 6, \
31          f"Need at least 6 calibration points, but only {len(world_coords)} were provided."
32
33      G = generate_estimation_matrix(world_coords, image_coords)
34      M = G.T @ G
35
36      eigval, p = scipy.sparse.linalg.eigs(M, k=1, which="SM")   # solve for minimum p using eigenvalue problem
37      proj_matrix = p.real.reshape(3, 4)   # take only real part of p and convert into 3x4 matrix
38
39      return proj_matrix, eigval
40
41
42  def project_point(projection_matrix: ProjMatrix, world_coords: Vec3f) -> Vec2f:
43      """
44      Calculate pixel coordinate from 3D world coord using projection matrix
45      """
46      return to_inhomogenous(projection_matrix @ to_homogenous(world_coords))   # turn into inhomogenous coords
```

calicam/extract.py

```
1   import numpy as np
2   import scipy.linalg
3   from math import sqrt
4   from nptyping import  Shape, Double
5
6   from .projection import generate_proj_matrix, ProjMatrix
7   from .vecs import *
8
9   CalMatrix = np.ndarray[Shape["3, 3"], Double]
10  RotMatrix = np.ndarray[Shape["3, 3"], Double]
11
12
13  def calibrate_camera(world_coords: list[Vec3f],
14                       image_coords: list[Vec2f]) -> tuple[ProjMatrix, CalMatrix, RotMatrix, Vec3f]:
15      """
16      Decomposes the projection matrix into the calibration matrix,
17      rotation matrix, and translation matrix.
18      """
19      proj_matrix, _ = generate_proj_matrix(world_coords, image_coords)
20
21      K, R = scipy.linalg.rq(proj_matrix[:, :3])   # rq decomposition
22
23      # enforce positive diagonal on K
24      D = np.diag(np.sign(np.diag(K)))
25      K = K @ D
26      R = D @ R
27
28      # scale projection matrix and calibration matrix to reflect real world scaling
29      scale_factor = 1 / K[2][2]
30      proj_matrix *= scale_factor
31      K *= scale_factor
32
33      # extract translation vector from P
34      t = tuple(-np.linalg.inv(proj_matrix[:, :3]) @ proj_matrix[:, 3])
35
36      return proj_matrix, K, R, t
37
38
39  def extract_intrinsics(K: CalMatrix) -> tuple[Vec2f, Vec2f]:
40      """
41      Extract principle point and focal lengths from calibration matrix
42      """
```

```
43        principal_point = (K[0][2], K[1][2])
44        focal_lengths = (K[0][0], K[1][1])
45        return principal_point, focal_lengths
46
47
48    def extract_orientation_zyx(R: RotMatrix) -> Vec3f:
49        """
50        Extract tait-bryan angles (zyx) from rotation matrix
51        """
52        return (
53            np.degrees(np.arcsin(R[2][1] / sqrt(1 - (R[2][0])**2))),  # alpha (x rotation)
54            np.degrees(np.arcsin(-R[2][0])),  # beta (y rotation)
55            np.degrees(np.arcsin(R[1][0] / sqrt(1 - (R[2][0])**2))),  # gamma (z rotation)
56        )
```

calicam/vecs.py

```
1     from math import sqrt
2
3     Vecf = tuple[float, ...]
4
5     Vec2f = tuple[float, float]
6     Vec3f = tuple[float, float, float]
7
8
9     def to_homogenous(vec: Vecf) -> Vecf:
10        return (*vec, 1.0)
11
12
13    def to_inhomogenous(vec: Vecf) -> Vecf:
14        return tuple(map(lambda v_i: v_i / vec[-1], vec[:-1]))
15
16
17    def euclidean(a: Vecf, b: Vecf) -> float:
18        assert len(a) == len(b), f"Vectors need to have the same dimension"
19        return sqrt(sum((b_i - a_i)**2 for a_i, b_i in zip(a, b)))
```