

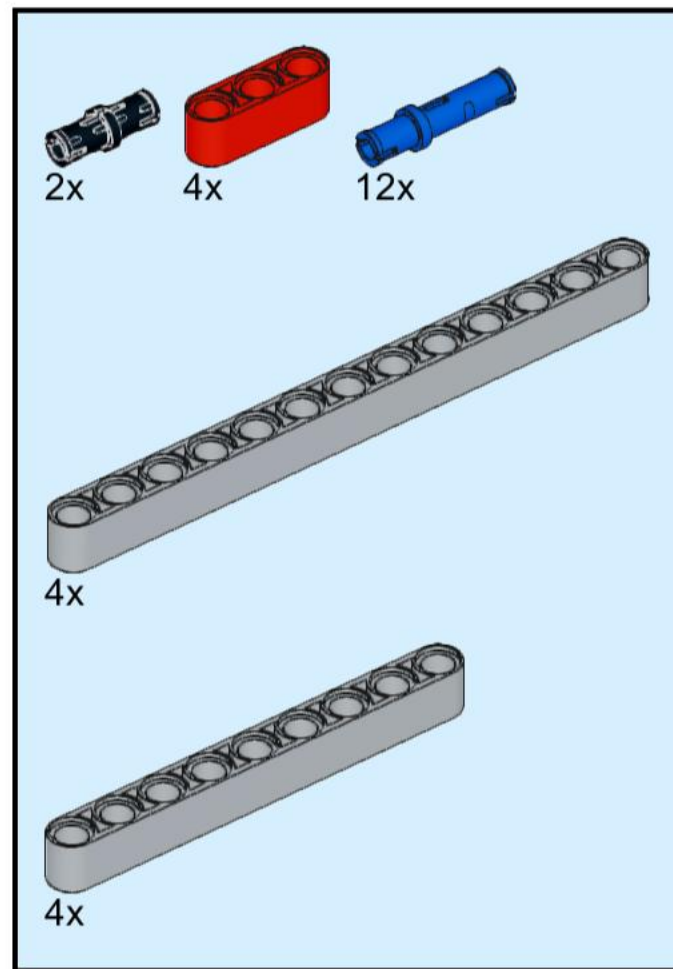
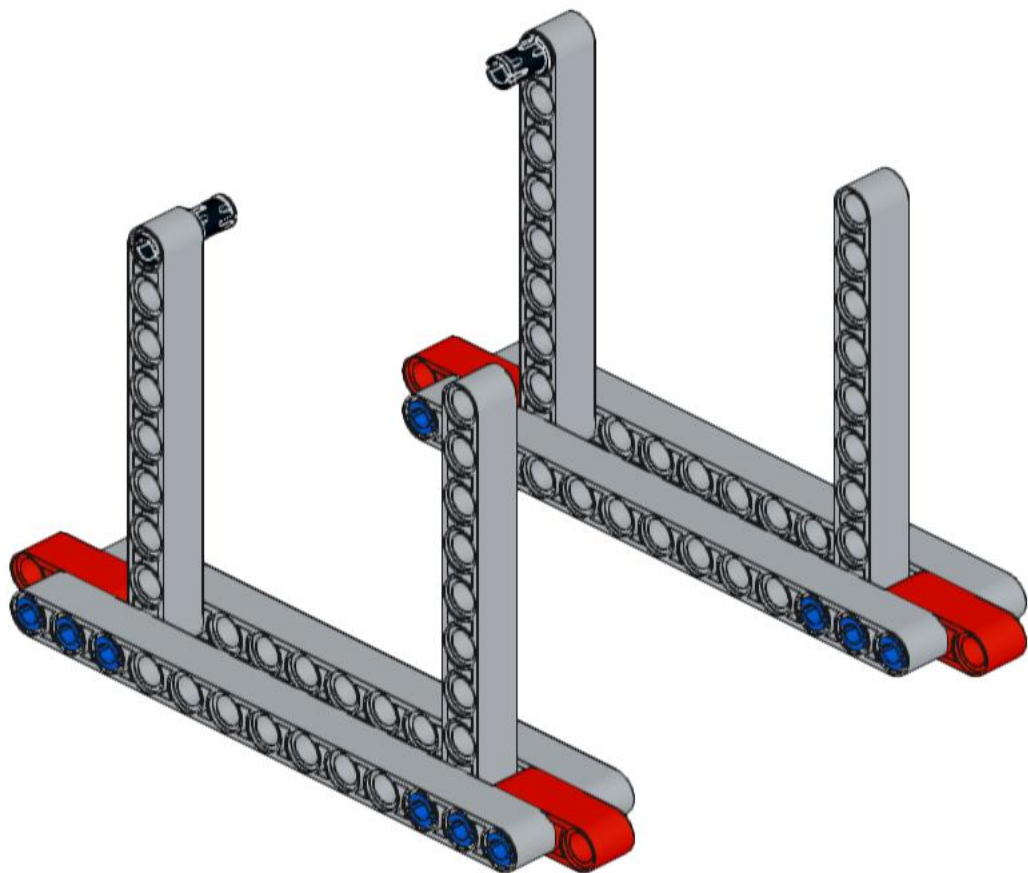




1

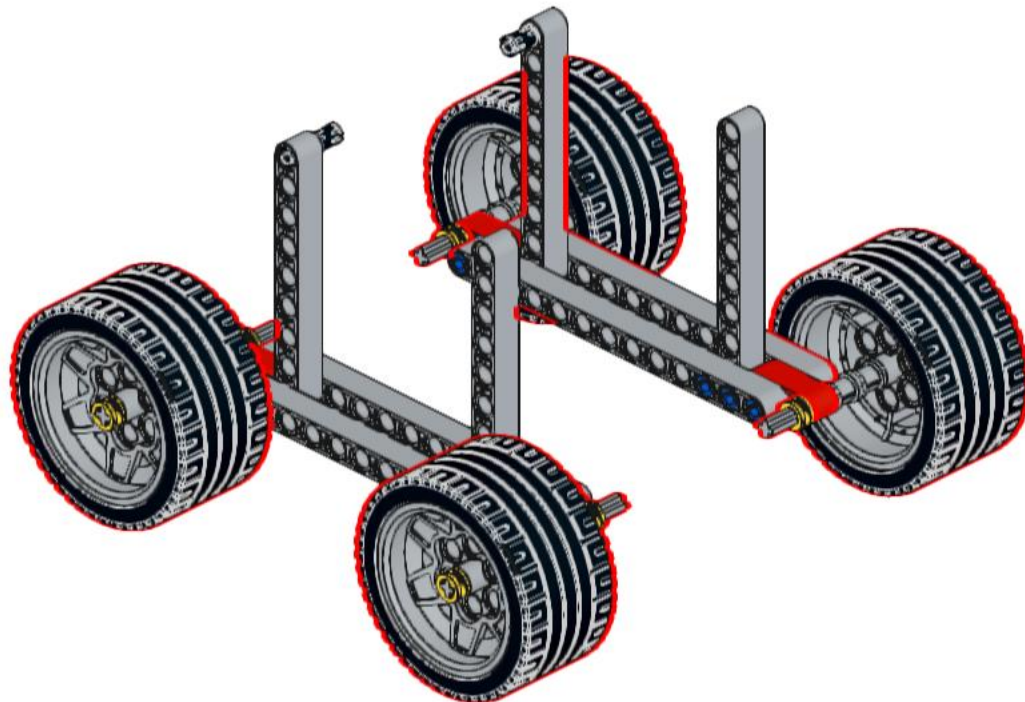



2

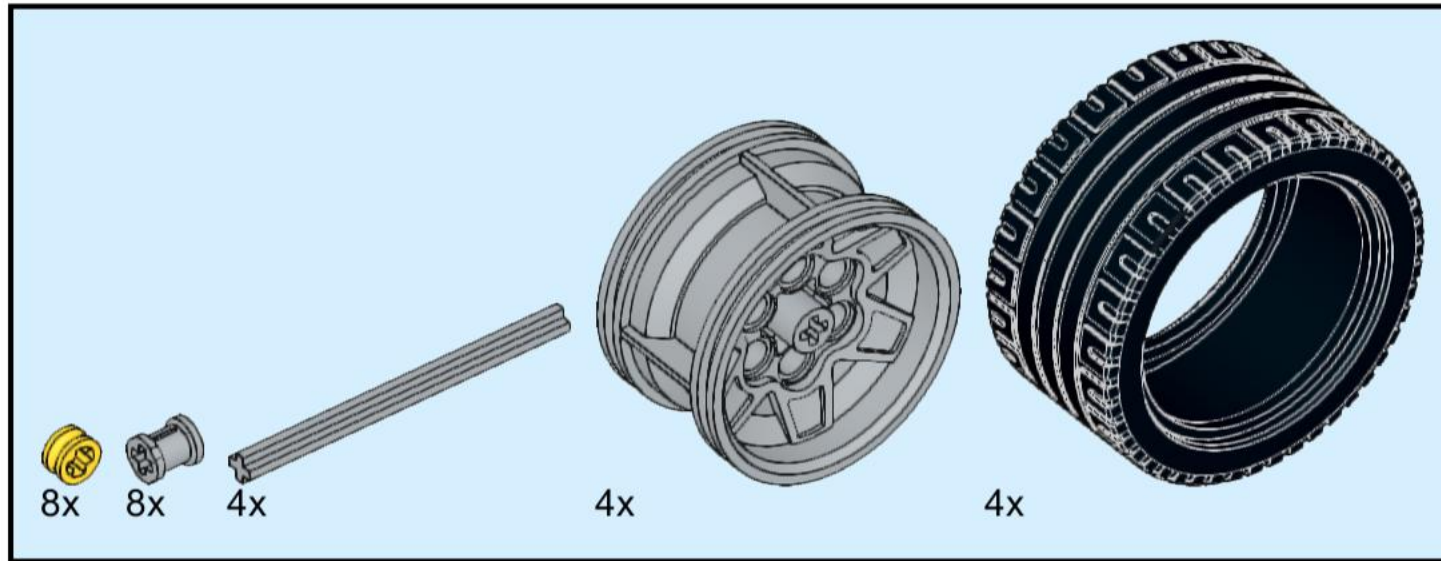



3

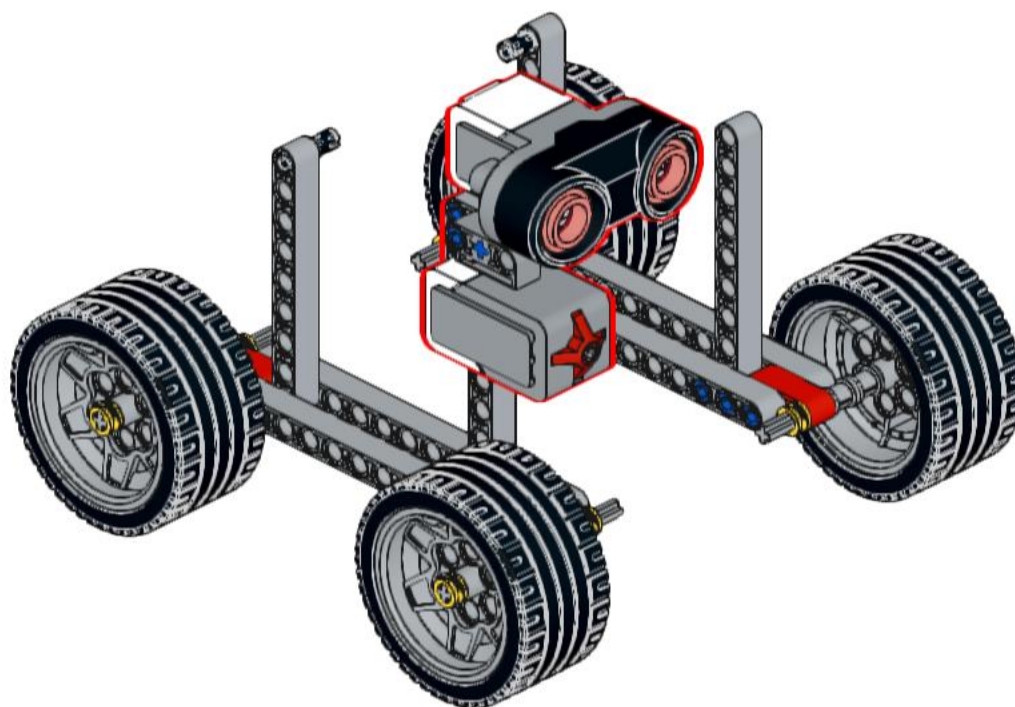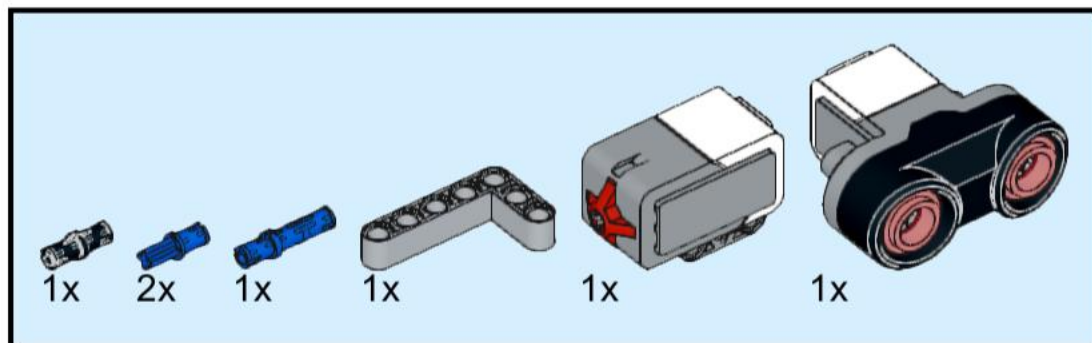



4

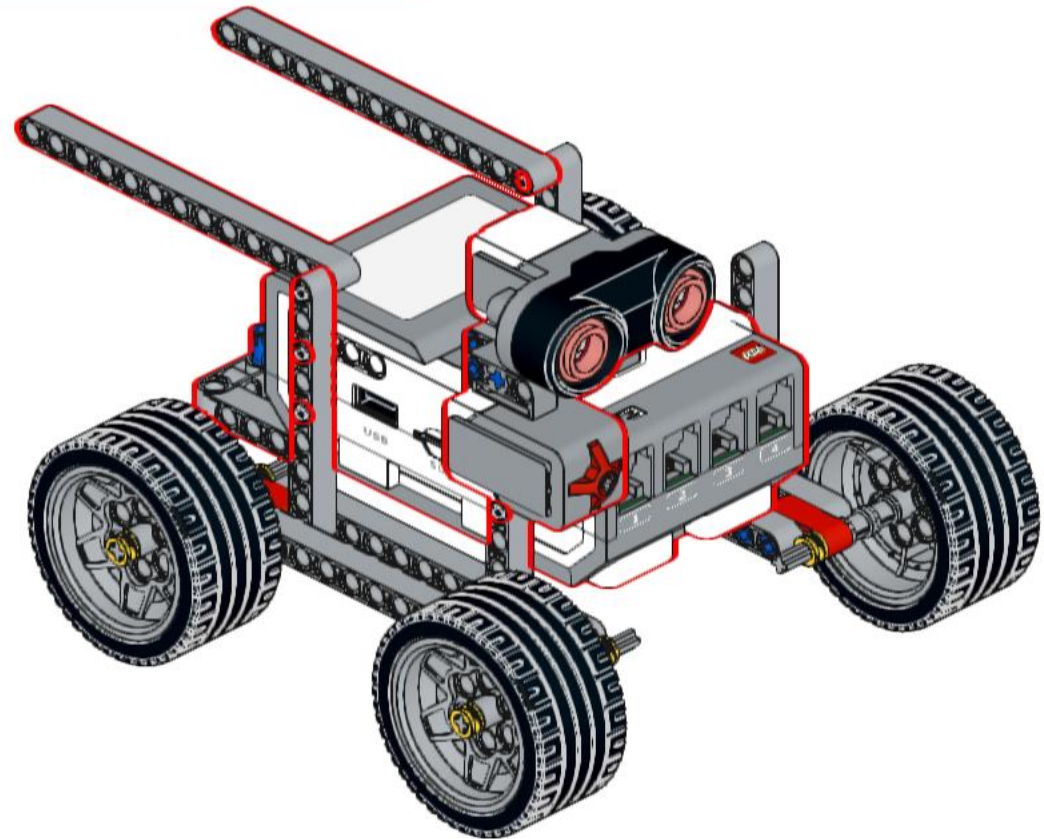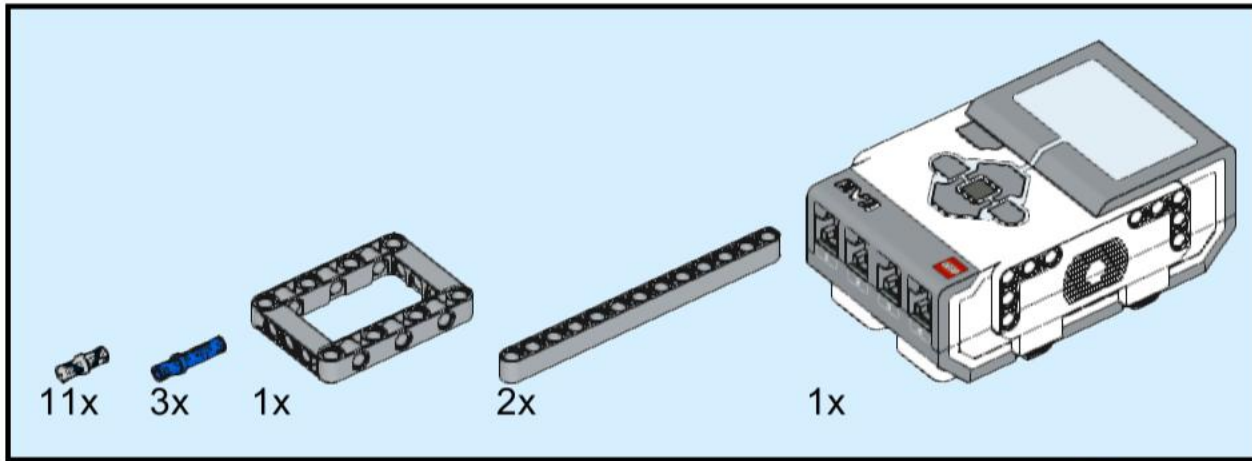



5

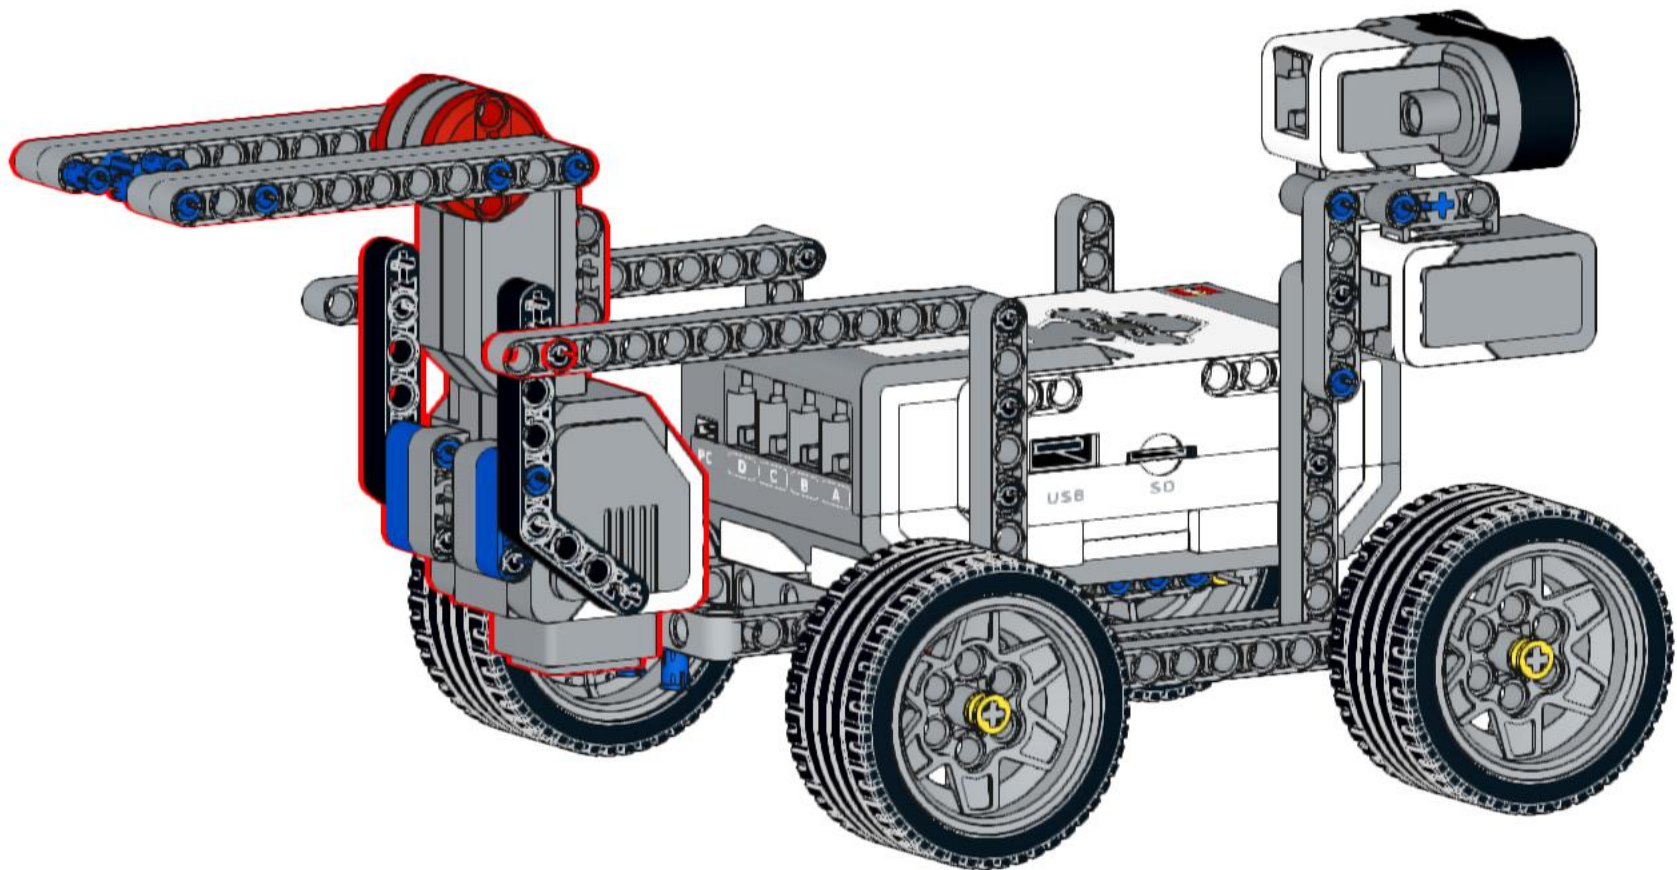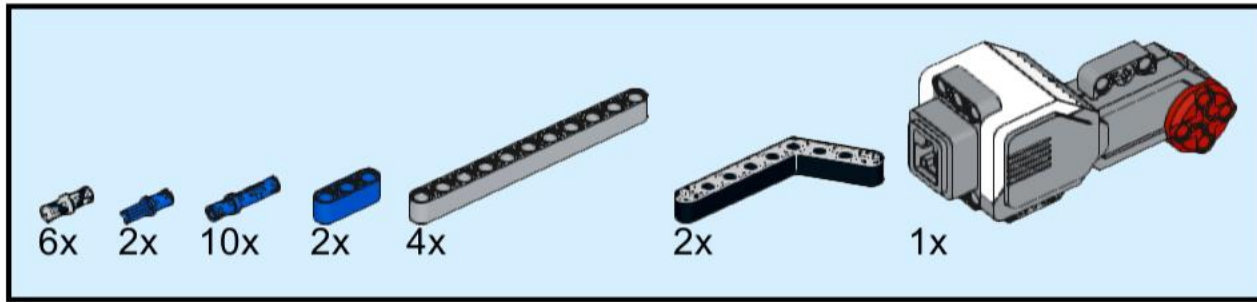



6

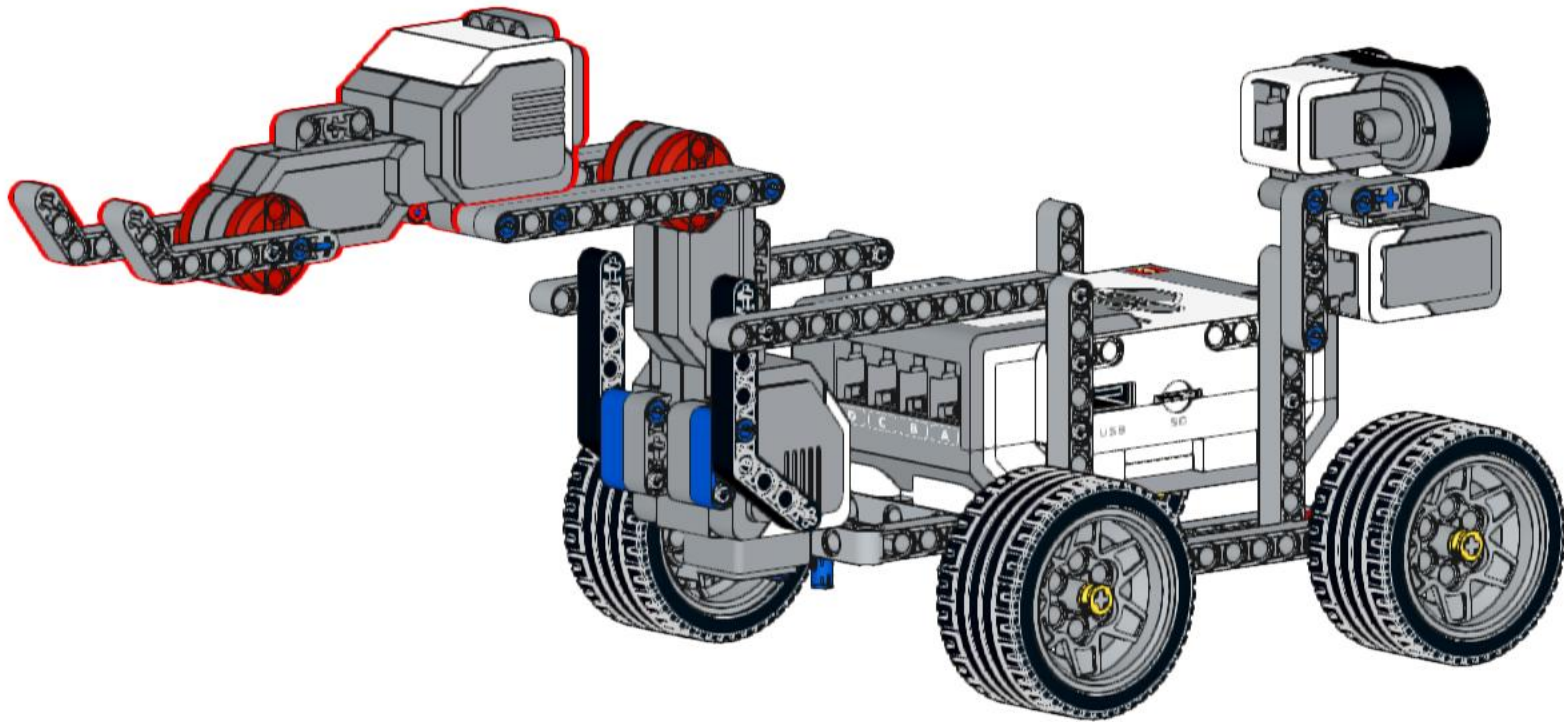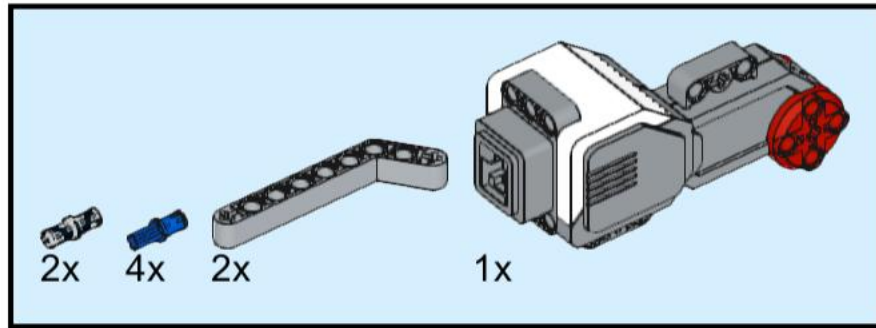

7

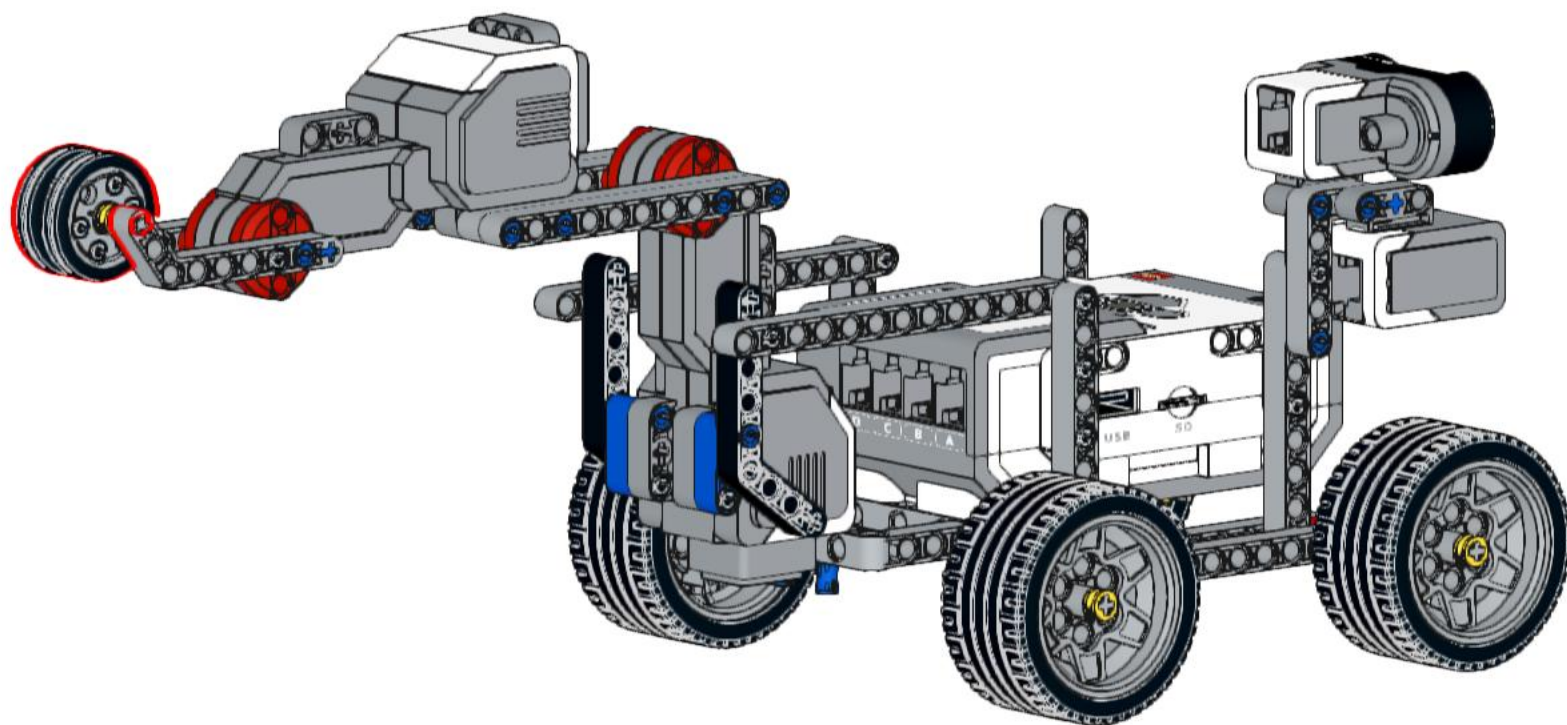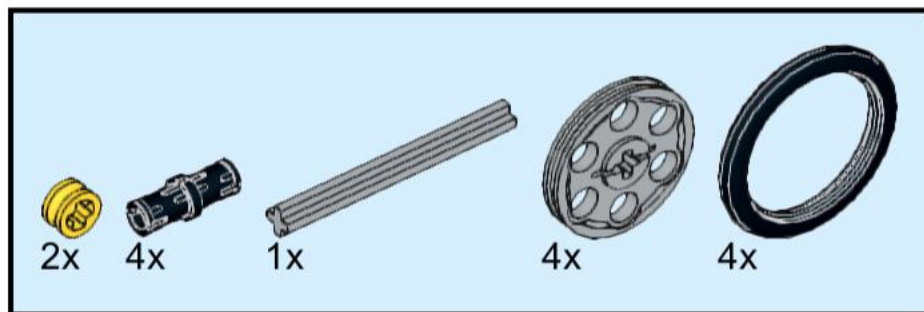

8

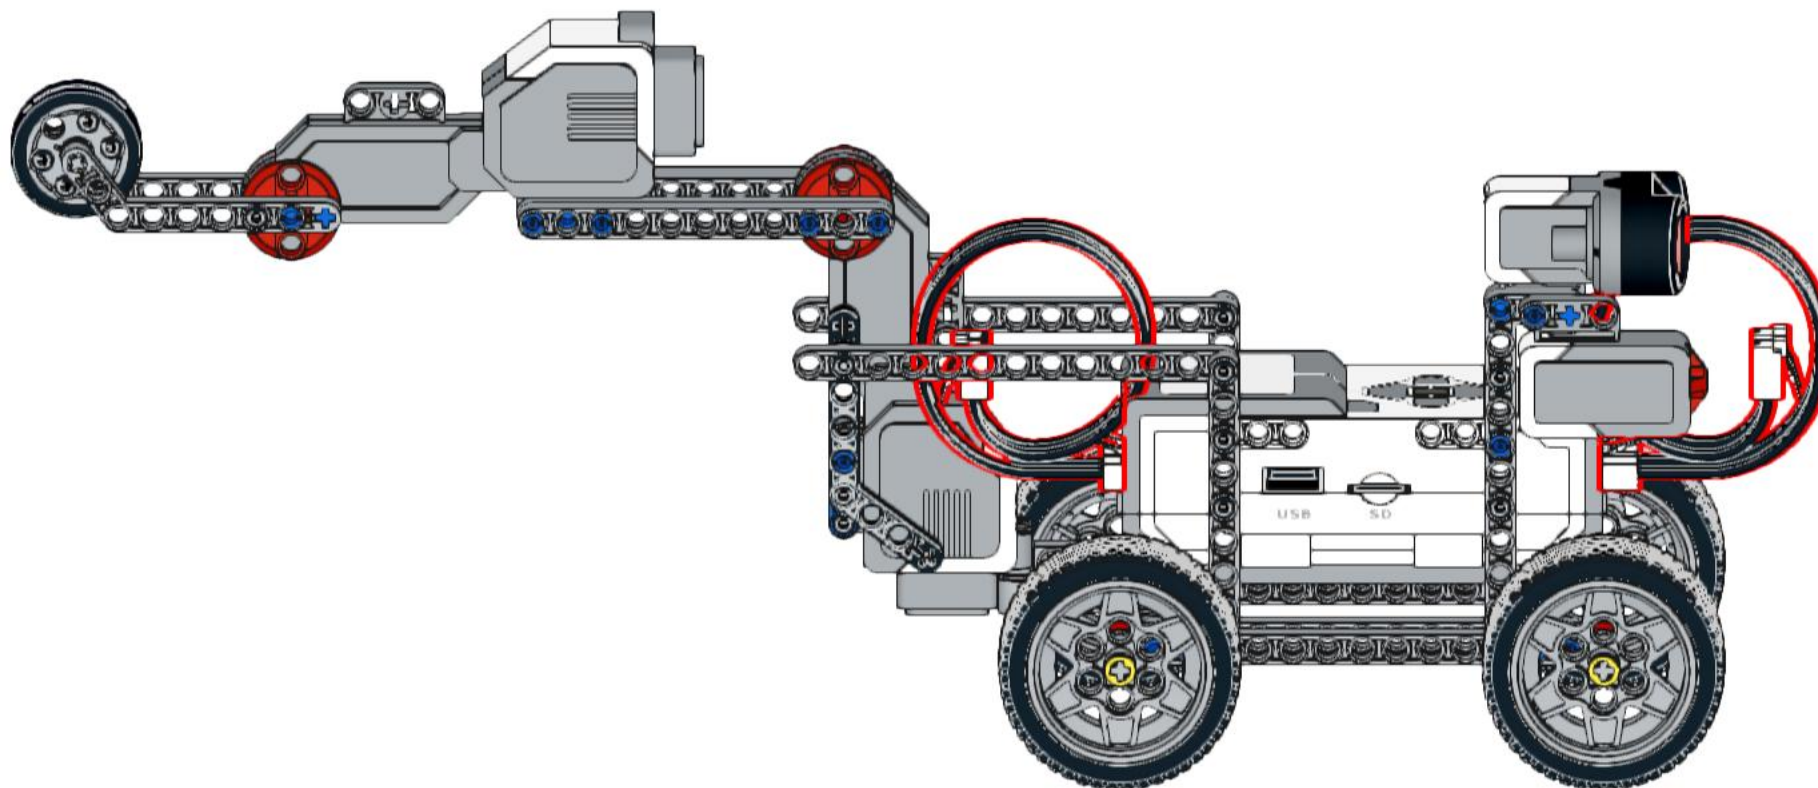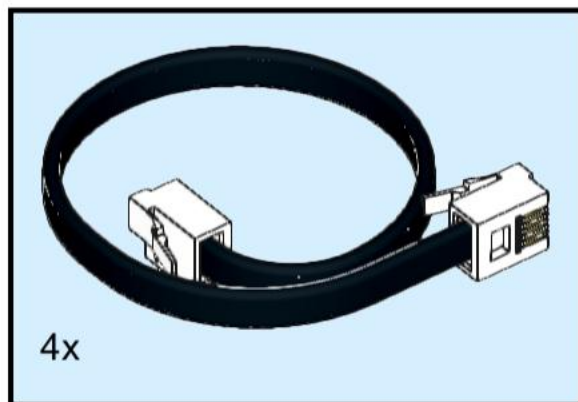





**4x
41897
Black**



4x
4185
Light Bluish Gray



2x
32271
Light Bluish Gray

1x
64179
Light Bluish Gray

4x
40490
Light Bluish Gray

4x
32525
Light Bluish Gray

6x
41239
Light Bluish Gray



1x
95648
White

**1x
95652
White**

**4x
55804
White**

A technical diagram showing a cable with a braided shield and a central conductor being connected to a terminal block. The shield is connected to the ground terminal, and the central conductor is connected to the signal terminal.

**2x
95658
White**

**1x
95646c01
White**



4x
32523
Red



10x
4265c
Yellow



8x
42002

8x
43093
Blue



2x

2x
32523
Blue



14x

14x
6558
Blue



12x
30550

12x
32556
Blue