

1 2 3 4 5 6

A

A

B

B

C

C

D

D

STANDARD TOLERANCES
UNLESS SPECIFIED

x = ± 0.100

x.x = ± 0.050



x.xx = ± 0.010

ANGLES = $\pm 0.50^\circ$


1. MACHINED 0.5×0.5 CHAMFER ON THREADS.

2. REFER TO CAD FOR UNDEFINED GEOMETRY.

3. BEAD BLAST SURFACE TREATMENT.
4. ENSURE SPECIFIED TOLERANCES ARE MAINTAINED AFTER BLASTING.
5. PERFORM FINAL MACHINING ON CRITICAL FEATURES AFTER BLASTING IF REQUIRED.

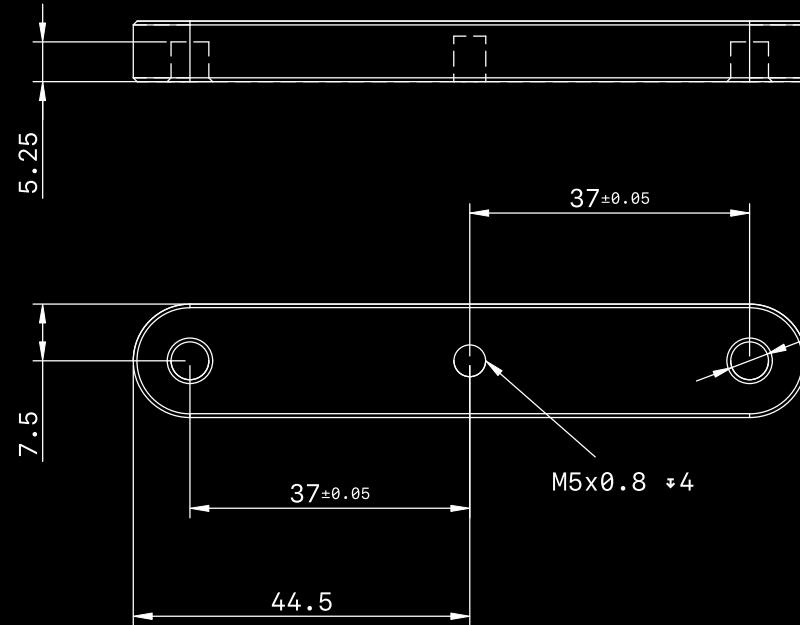

$2 \times \varnothing 5^{+0.011}_{-0.001}$ for $\varnothing 5$ shaft

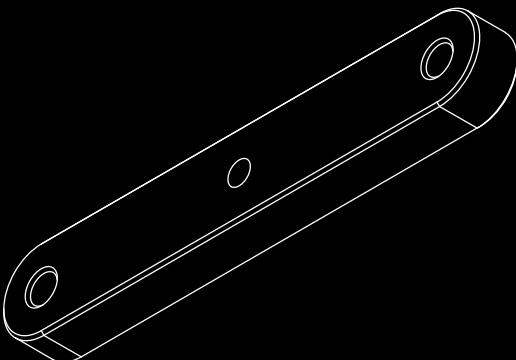

PROJECT
REMORPH

PART NAME
FTLZIB

QUANTITY
2

PROJ. ANG.

SIZE
A4

SCALE
1:1

LAST UPDATED
12 Dec. 24