

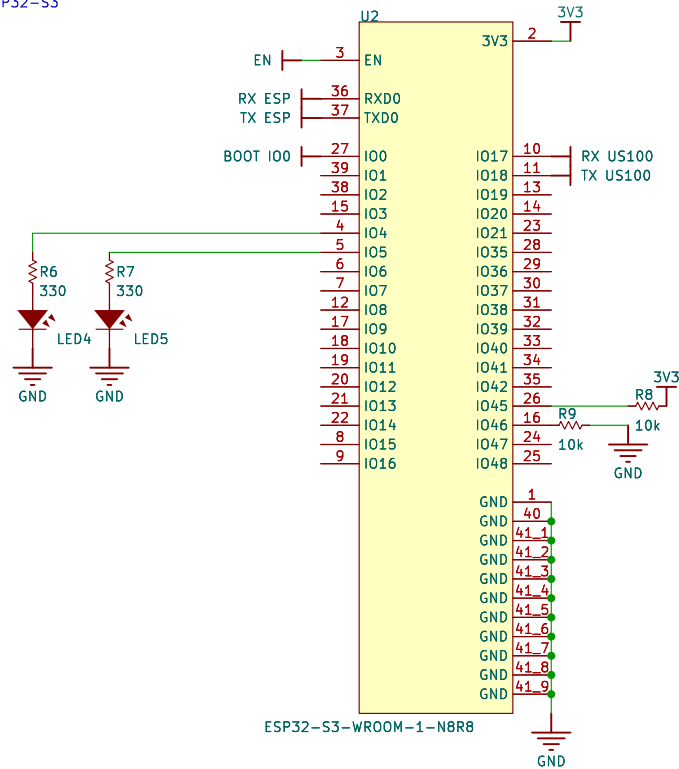




Khởi tạo nguồn 5V, 3.3V



The diagram illustrates a power supply circuit for a 5V and 3.3V system. It begins with a DC jack (JDC1) connected to a 500mA fuse (F1) and a diode (DIO1). This is followed by three 5V decoupling capacitors (Cx1, Cx2, Cx3, 104). Then, a 5V LED indicator (LED1) with a 220 ohm resistor (R1) is connected. The main 5V regulator (U1, LM1117-3.3V) has its input (IN) connected to the 5V line and its output (OUT) connected to a 3.3V output. The 3.3V output is decoupled by three 3.3V capacitors (Cx4, Cx5, Cx6, 104). Ground connections are shown throughout the circuit.

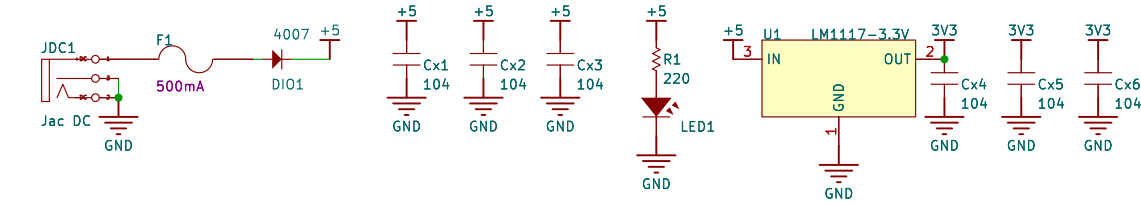

Các header kết nối

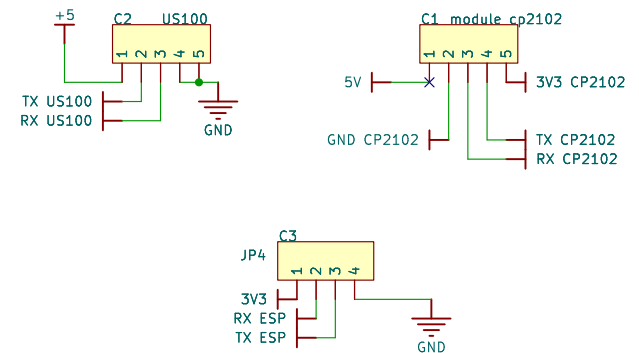

Khối cách ly tín hiệu Software

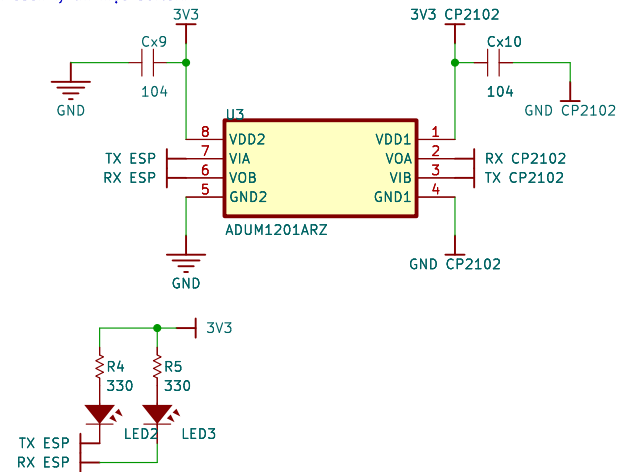

Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.8		Id: 1/1

Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.8		Id: 1/1