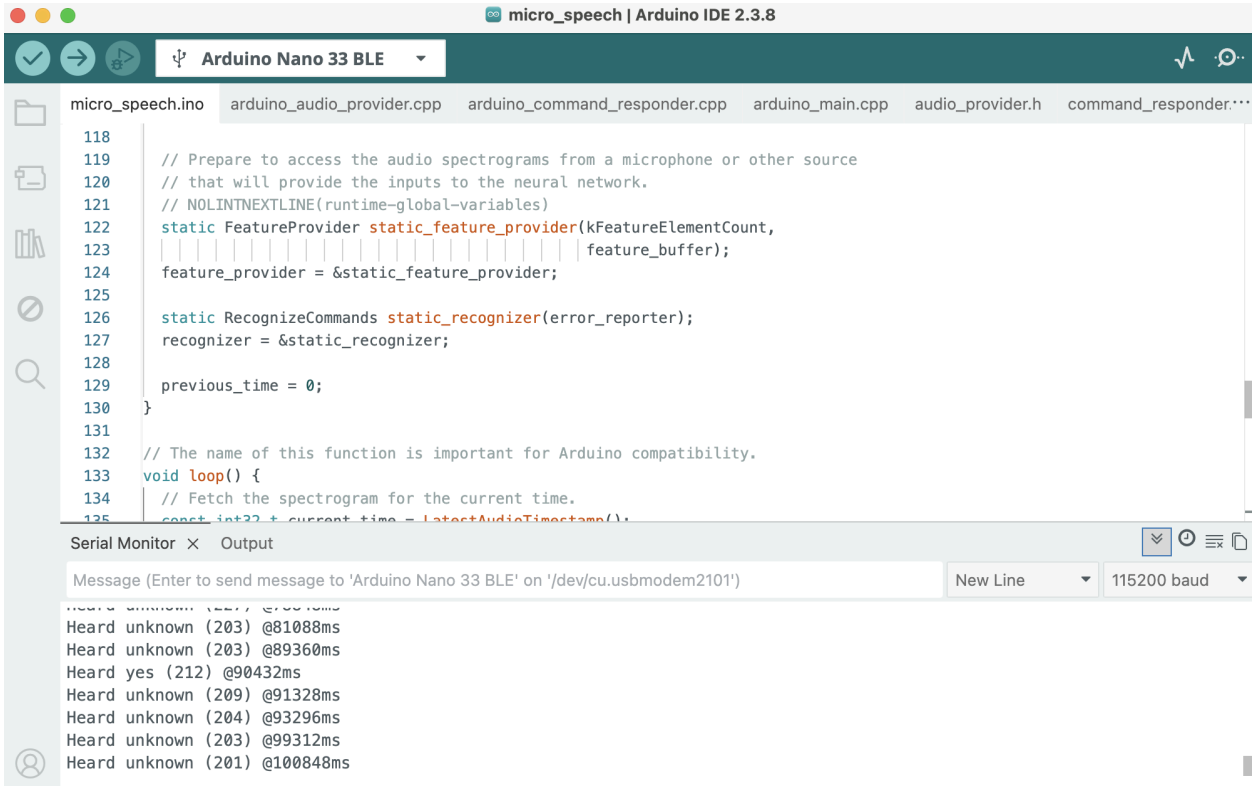1. The raw audio has different amplitudes over time even though they are pointing to the same key word. Using spectrogram/MFCC-style features spotting the pitch, energy at different frequencies.
2. The representative dataset is used to estimate the range of activations and weights during the neural network, and can be used to find the conversion of floating point values and INT8 values.
3. Splitting the samples for training/validation/testing, applying optional data augmentation, converting the audio into feature vectors, and returning the processed feature data and corresponding labels.
4. g_model contains the actual bytes of the TensorFlow Lite model.
   g_model_len stores the total number of bytes in the model.
   Tensoflow Lift loads the model by using the corresponding byte array.
5.