



AI Glasses V2 Narrow Temple Option 1 - local compute pod, slim rear


Current reference: straight right-temple envelope

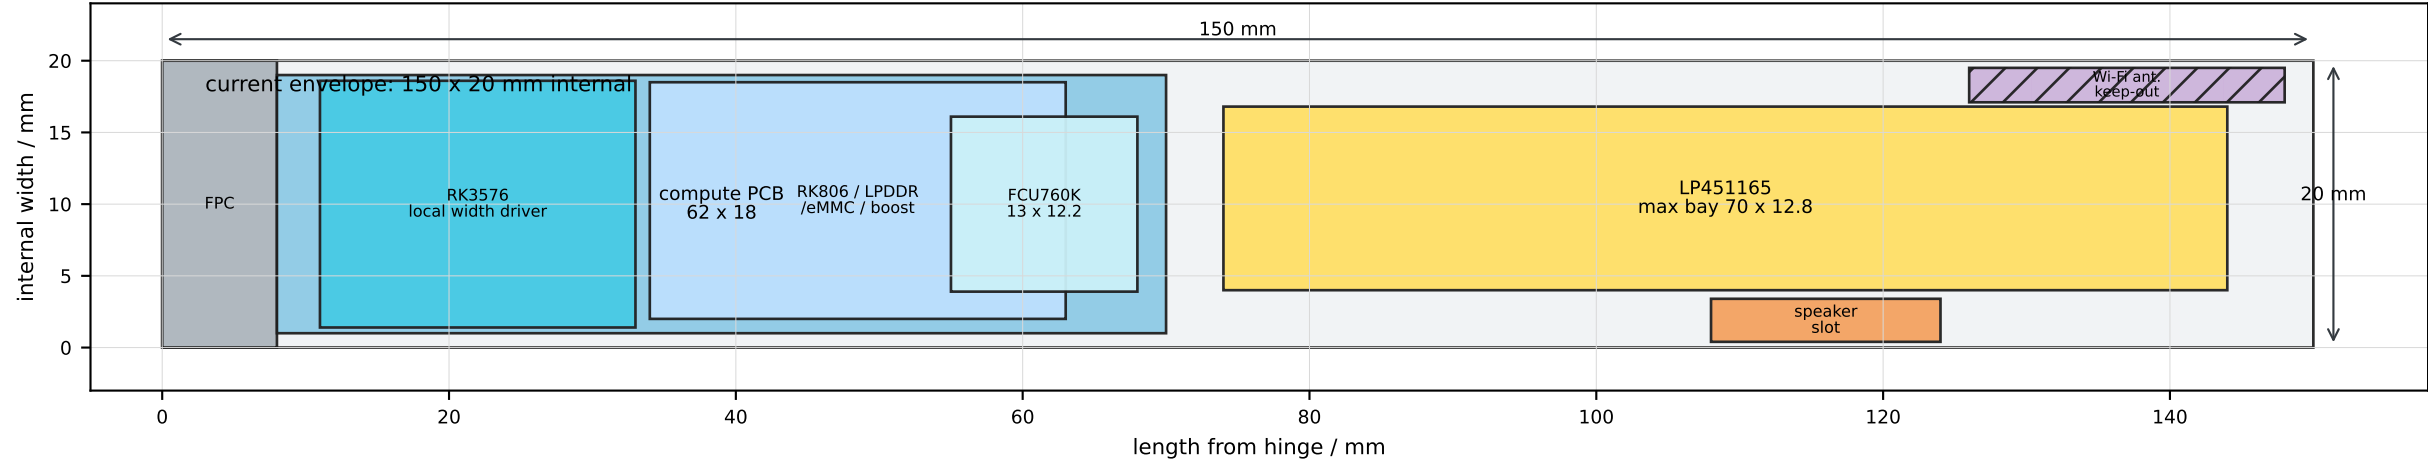

Option 1: local compute pod + narrow rear temple

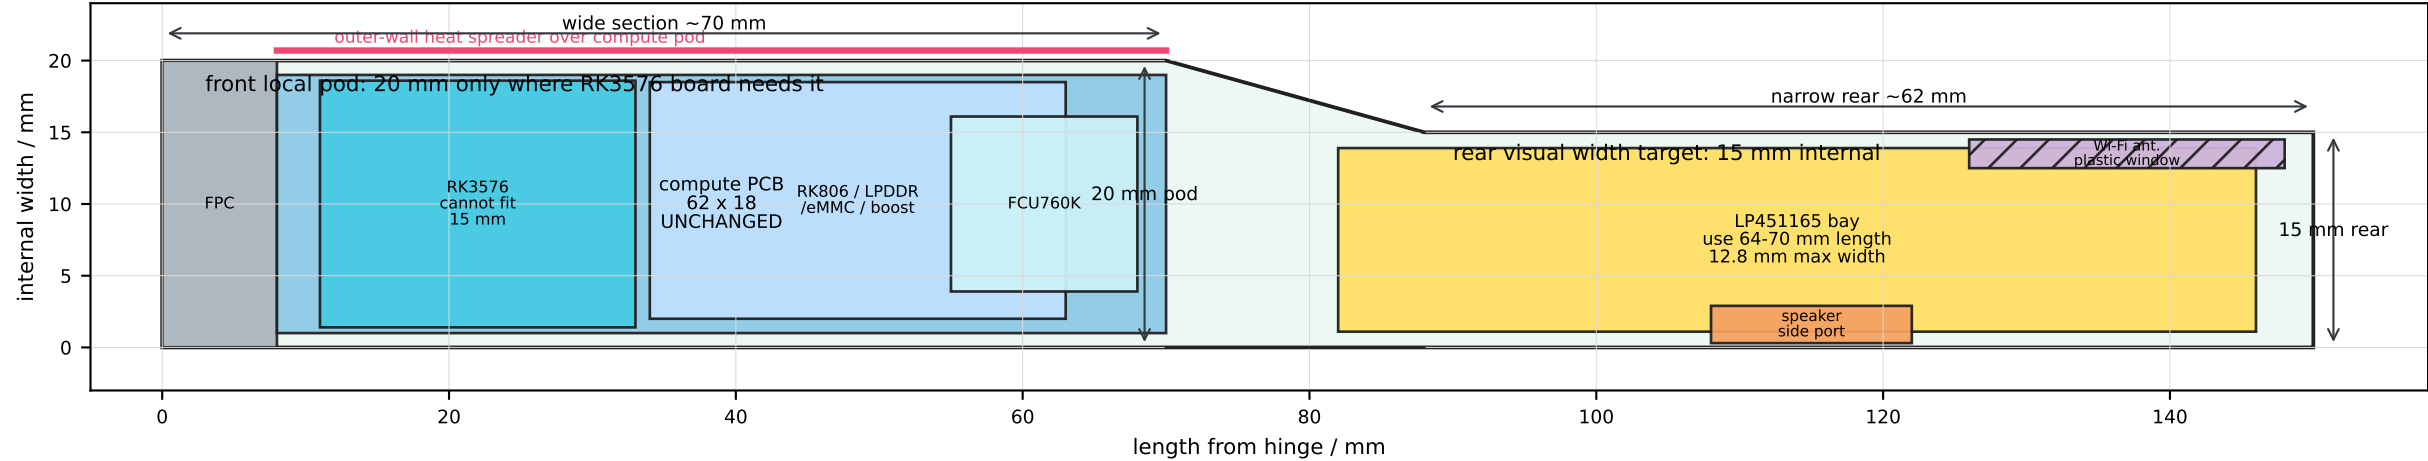

Left temple pairing: AON side can target 15 mm straight

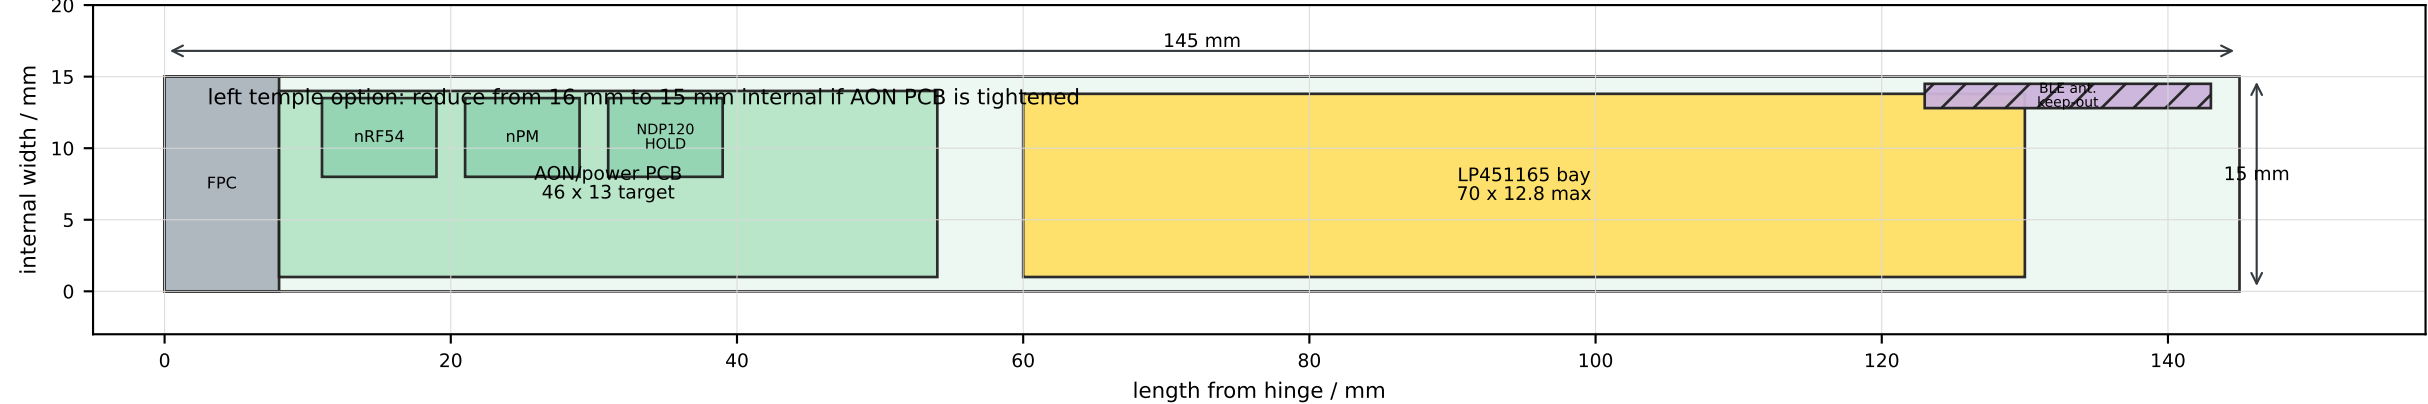

What Option 1 buys and what it does not buy

Current right temple	20 mm internal width along most of temple
Option 1 right temple	20 mm only at compute pod; rear target 15 mm
Left temple	15 mm internal target is plausible; needs AON PCB re-pack
Hard limit	RK3576 + memory zone is still a 18-20 mm local pod
Gate before PCB	CAD must check taper, shell wall, antenna window, heat path, battery swell
This option preserves the current schematic/BOM. It is a mechanical floorplan option only; no KiCad routing release implied.	