

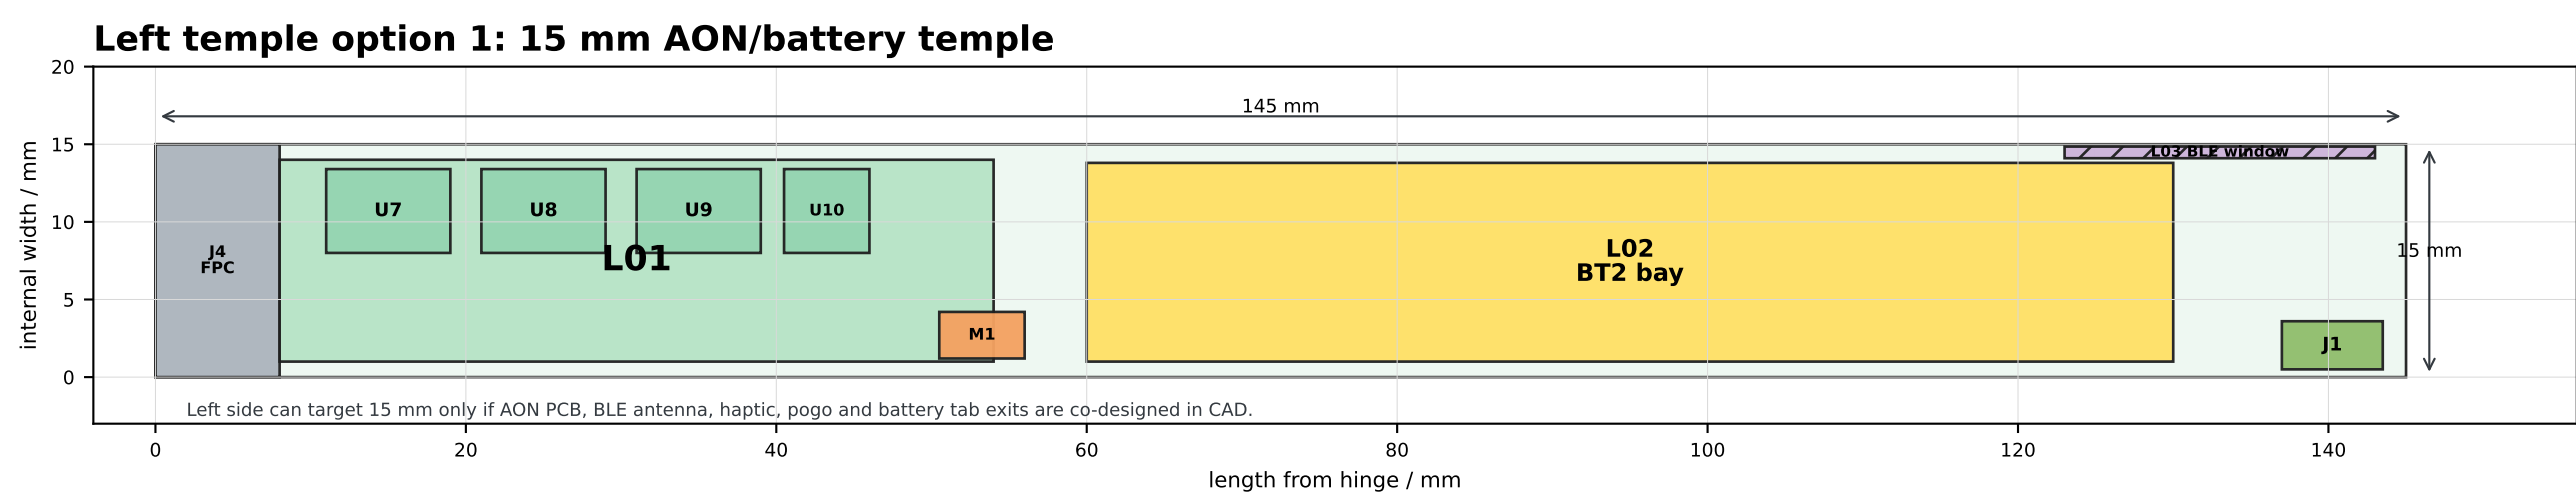


AI Glasses V2 Narrow Temple Option 1 - complete readable placement atlas

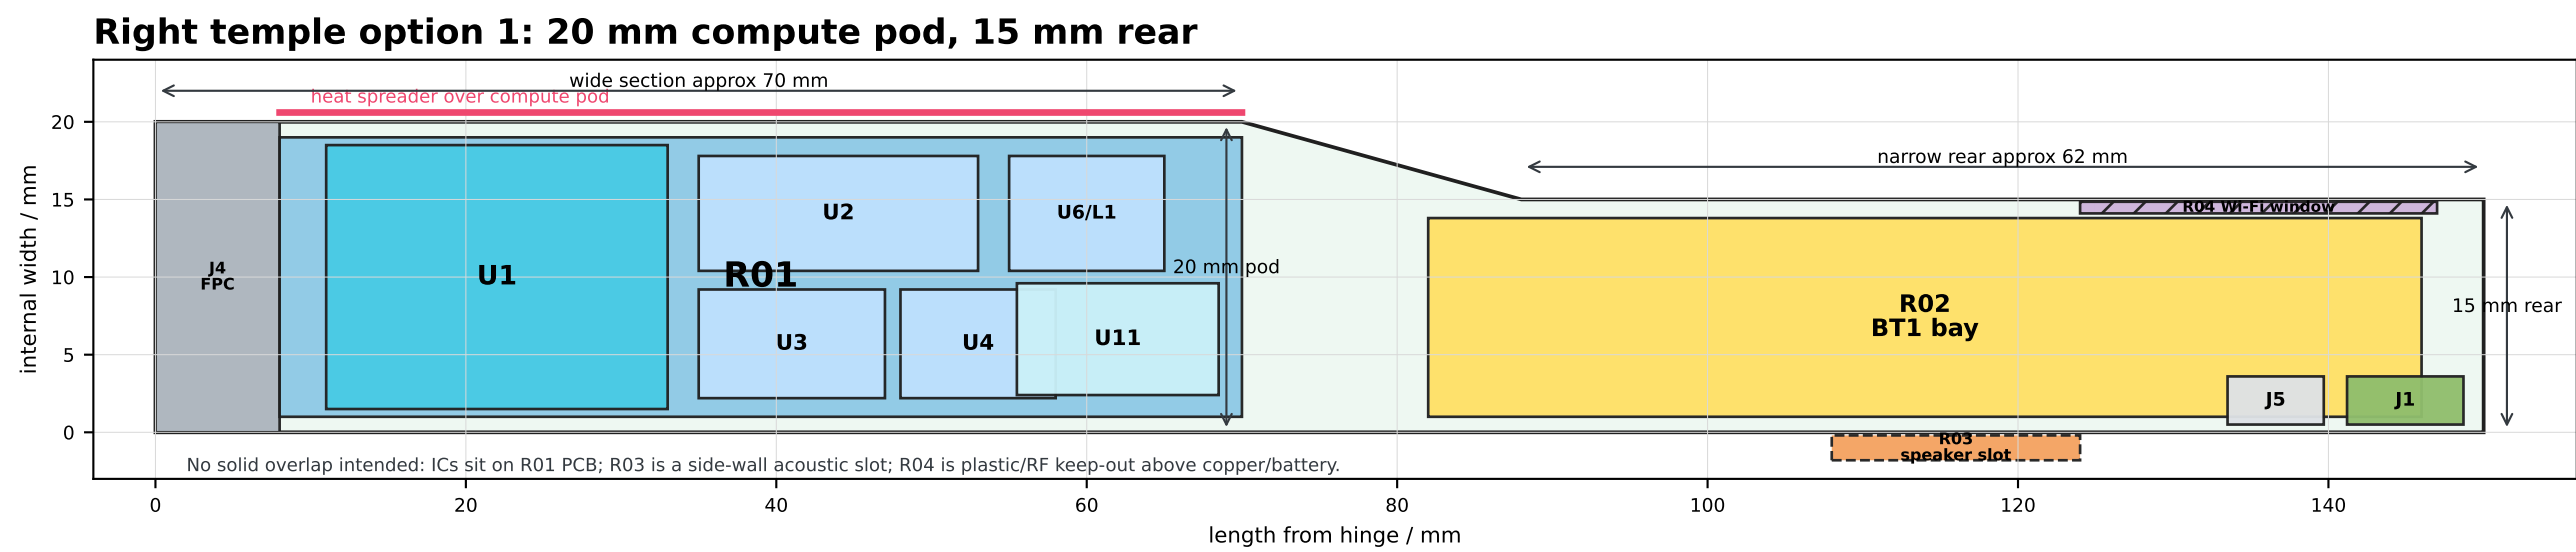

Front frame render: sensor board, camera, mics, FPC

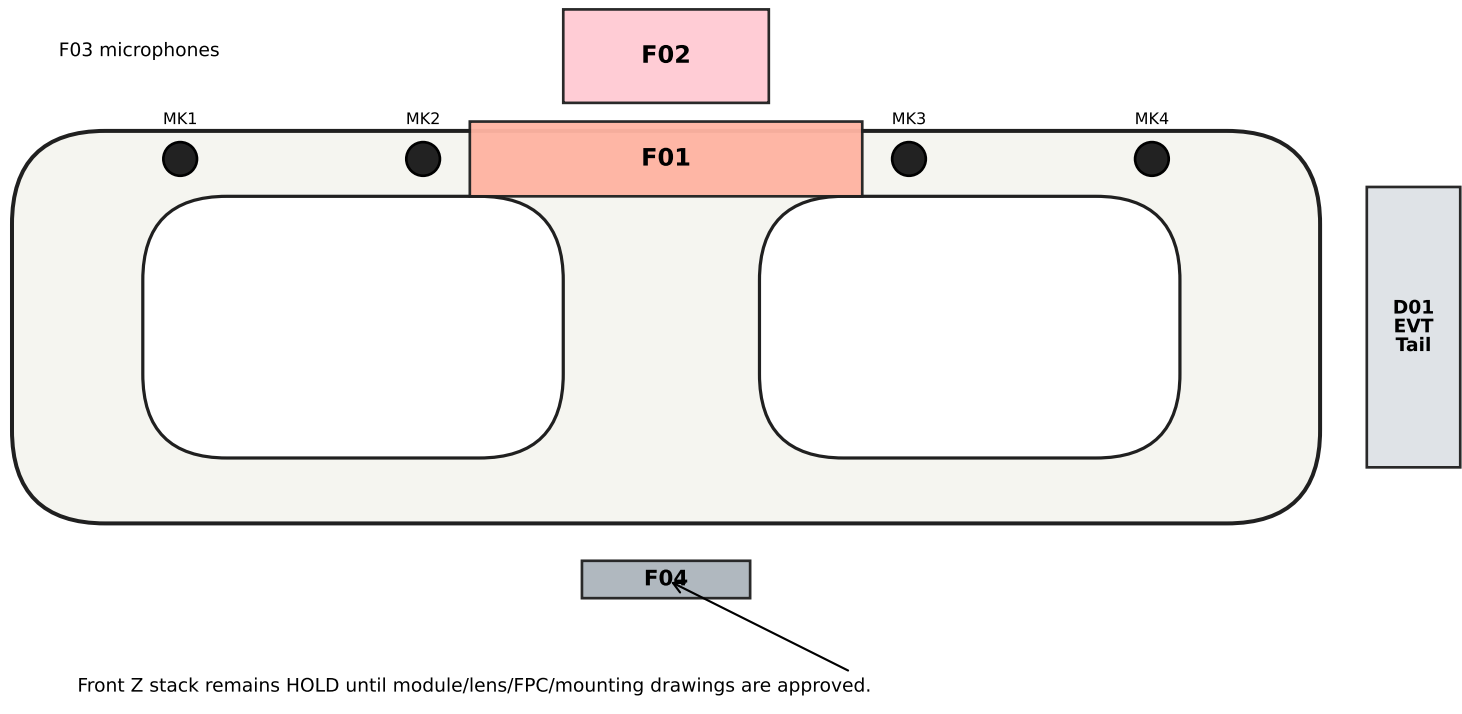

Complete hardware inventory represented by zones

Zone inventory (* = DNP in current schematic/BOM)

R01 Right compute SoC/memory/power PCB: U1 U2 U3 U4 U5 U6 U11 U12 U13 U20 U21 U28 U29

U30 L1 L2 C1 RT3 Y1 R9-R12 R16-R20 RS4-RS6

R02 Right rear battery/power safety: BT1 F1 RS3 RT1 TP2 U27 plus BAT/VSYS corridor

R03 Right audio/acoustic: LS1 LS2* U20 U21 RS6 U30 R19 R20. Speaker slot shown as side-wall feature, not battery overlap.

R04 Right RF / service / interconnect: J7 Wi-Fi antenna, J5 RF debug, J1 pogo, J4

L-R/FPC, antenna keep-out

L01 Left A0N/power PCB: U7 U8 U9 U10 U22 U23* U25* Q1* C2 R3 R4 R21-R23 RS1

L02 Left rear battery/power safety: BT2 F2 RS2 RT2 TP2 U26 plus shared BAT/VSYS corridor

L03 Left BLE/RF/haptic: J6 BLE antenna, M1 haptic motor, matching/keep-out

F01 Front sensor board: U14 U15 U16 U17 U18 U19 U31 U32 U33 L3 R5 R6 R13-R15 RS7-RS9 J3

F02 Front camera/lens stack: U14 CAM_LENS CAM_FPC; total Z is HOLD until module drawing

F03 Microphones: MK1 MK2 MK3 MK4

D01 EVT debug tail: J2 U24 R1 R2 TP1 SW1 SW2 SW3; lab/bring-up only

Full per-board reference list is exported as AI_Glasses_V2_Narrow_Temple_Option1_Inventory.*

Overlap rule for this drawing

OK	A small IC rectangle inside a PCB rectangle means the IC is mounted on that PCB. This is expected.
OK	A keep-out or heat-spreader line can cross an envelope if it marks a wall/plastic/copper restriction, not a solid object.
NOT OK	Battery solid overlapping RK3576/PMIC/boost/speaker magnet in the same Z layer would be a real mechanical conflict.
NOT OK	Antenna keep-out overlapping copper, battery metal pouch, speaker magnet, screws, or ground return needs CAD/RF correction.
HOLD	Speaker cavity, battery tabs, FPC bend radius, connector mating heights and exact package heights still require supplier drawings.