



Controller




File: power_dist.kicad_sch




File: can_comm.kicad_sch




File: sensing.kicad_sch

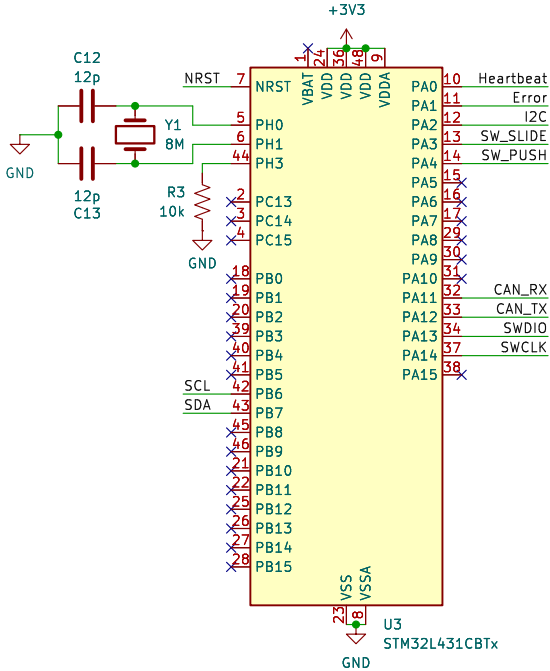


Reset Button




Connectors

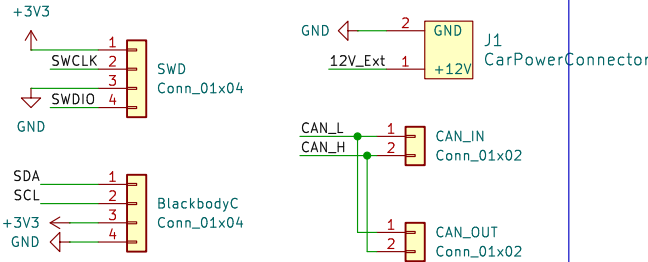


Bypass Capacitors



LEDs

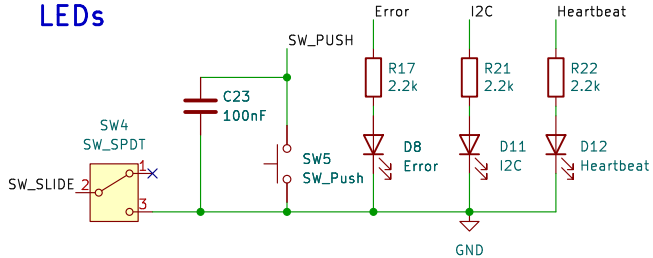

Sheet: /		
File: blackbody_a.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.2		Id: 1/4

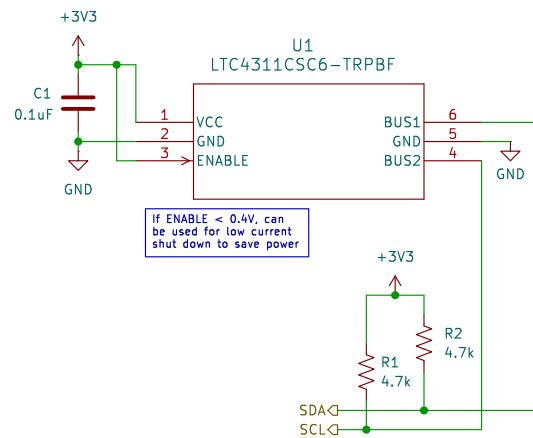

Sheet: /sensing/
File: sensing.kicad_sch

Title:

Size: A4

Date:


KiCad E.D.A. 8.0.2

Rev:


Id: 2/4

Vin Power Protection


Current limit = 1.2A
OVLO - 13.4V
UVLO - 10.34 V
Inrush current limited to 54mA

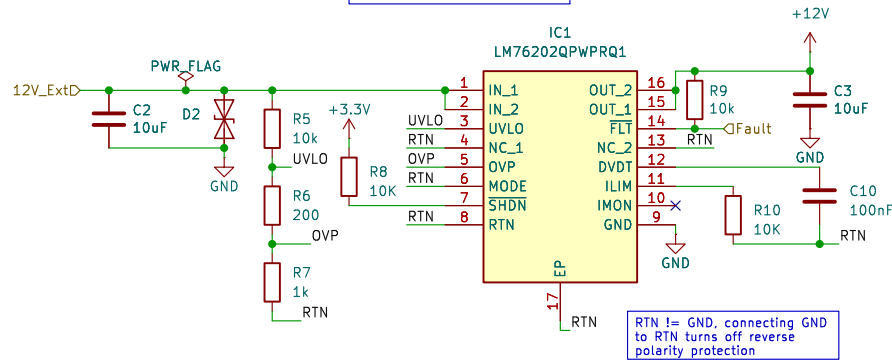


LEDs

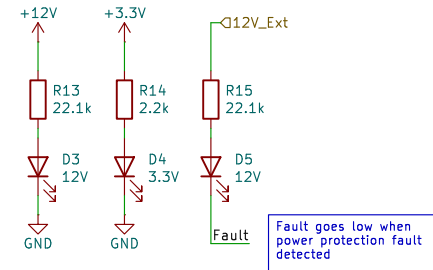

12V -> 3.3V

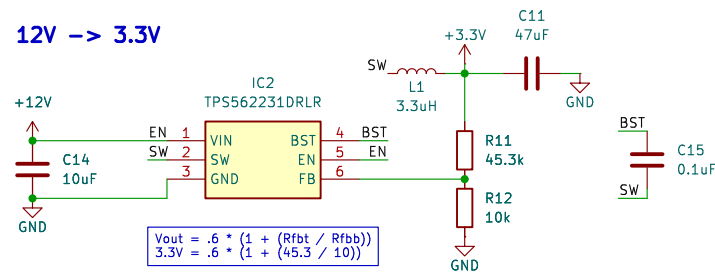

Testpoints



Sheet: /power_dist/
File: power_dist.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. 8.0.2

Rev:

Id: 5/4

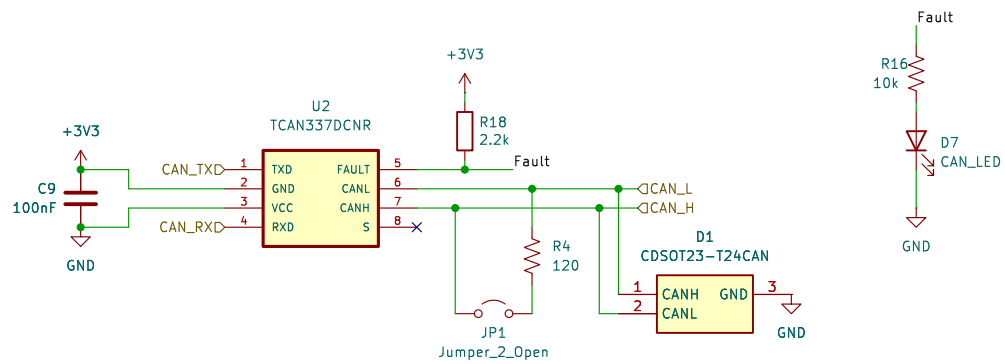

Sheet: /can_comm/
File: can_comm.kicad_sch

Title:

Size: A4
KiCad E.D.A. 8.0.2

Date:

Rev:
Id: 5/4