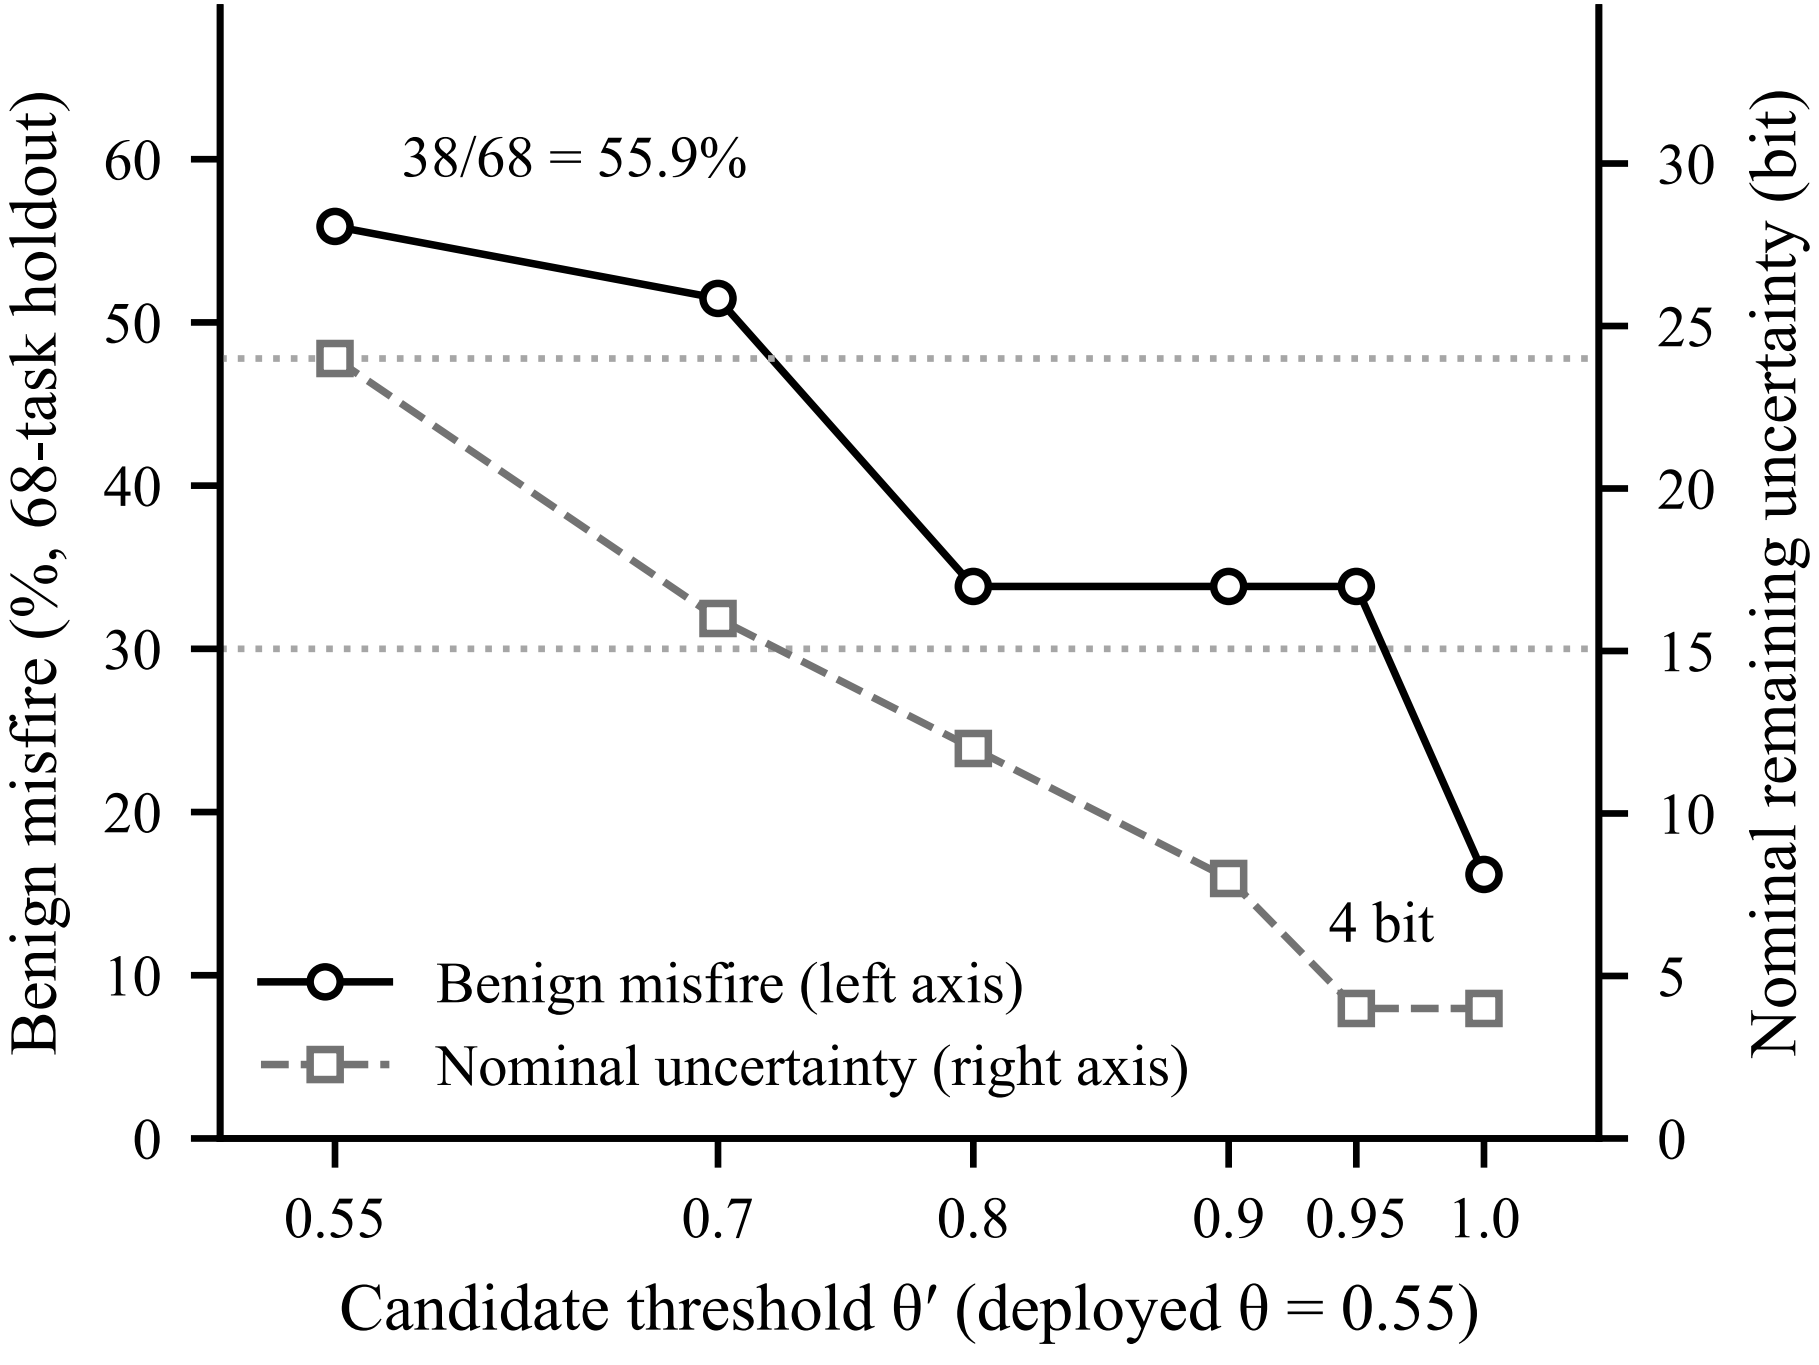
38/68 = 55.9%
4 bit
Benign misfire (left axis)
Nominal uncertainty (right axis)
Benign misfire (%, 68-task holdout)
Nominal remaining uncertainty (bit)
0
10
20
30
40
50
60
0
5
10
15
20
25
30
0.55
0.7
0.8
0.9
0.95
1.0
Candidate threshold θ′ (deployed θ = 0.55)