

Individual Project Report

Liam Brand

April 13, 2019

CONTENTS

Part I	Analysis	7
1.	Introduction	8
2.	Mobile Robotics	9
2.1	Introduction	9
2.2	Movement	9
2.2.1	Chassis	9
2.3	Rangefinding	11
2.3.1	Infrared	12
2.3.2	LIDAR	12
2.3.3	Ultrasonic	12
3.	An Investigation Into SLAM	15
3.1	Introduction	15
3.2	What is SLAM?	15
3.3	Uses of SLAM in Industry	15
3.4	The SLAM Problem	16
3.4.1	Full SLAM	17
3.4.2	Online SLAM	17
3.4.3	SLAM Taxonomy	18
3.5	A Look At A Potential Solution	19
3.5.1	Introduction	19
3.5.2	CSM	20
3.5.3	Suitability of CSM	21
3.6	An Investigation Into SLAM - Conclusions	21

Contents	3
4. Review of Tools and Techniques	22
4.1 Dealing with Scan Data	22
4.2 Dead Reckoning	22
4.3 Software Framework	23
4.3.1 MBED RTOS	23
4.3.2 μ C/OS-II	23
4.3.3 Microcontroller	24
5. Conclusions	25
Part II Synthesis	26
6. Introduction	27
7. Methological Approach	28
7.0.1 Initial Prototype	28
8. Design	29
8.1 Initial Prototype	29
8.1.1 Hardware	29
8.1.2 Software	31
8.2 Designing for Requirements	31
8.2.1 Movement	31
8.2.2 Observation	32
8.2.3 Processing Observational Data	33
8.3 Designing for Requirements	33
8.3.1 Movement	33
8.3.2 Observation	33
8.3.3 Processing Observational Data	33
8.4 Hardware	34
8.4.1 Chassis	34

Contents	4
8.4.2 Microcontroller	35
8.4.3 Sensor	35
8.5 Software	36
8.5.1 Robot	36
8.5.2 Map Building	36
8.5.3 Sensor	37
9. Implementation	38
10. Testing	39
 Part III Evaluation	 40
11. Introduction	41
12. Product Evaluation	42
13. Process Evaluation	43
14. Conclusions and Recommendations	44
 Part IV Appendices	 45

LIST OF FIGURES

2.1	An omnidirectional wheel, with 90 degree rollers	10
2.2	4WD Omni-Directional Robot Chassis	10
2.3	3WD Omni-Directional Robot Chassis	11
2.4	RPLIDAR A2M8	13
2.5	RPLIDAR A1M8	14
3.1	The SLAM problem illustrated [8]	17
8.1	Example shield setup	30
8.2	Example shield setup	32

LIST OF TABLES

8.1	Components and respective voltages	30
8.2	RPLIDAR SDK files	36
8.3	RPLIDAR SDK overview	37

Part I

ANALYSIS

1. INTRODUCTION

Before creation of the main product can begin, an understanding of the relevant fields must be achieved. The first aim of the analysis is to develop this understanding, by evaluating and then understanding relevant literature that has been identified as being relevant to the project. Following this appropriate tools for the product will be identified, both hardware and software. Finally conclusions will be drawn based on what has been researched and evaluated, and a series of core objectives that need to be achieved for the project to be a success will be determined. The achievement of these objectives should be possible thanks to the research that will be carried out here.

2. MOBILE ROBOTICS

2.1 Introduction

Here we will address some of the key aspects of mobile robotics that are relevant to the project, chiefly how movement is dealt with in mobile robotics as well as range-finding.

2.2 Movement

This section aims to explore how movement is generally achieved in the world of mobile robotics. From this, a greater understanding of robotic movement should be achieved which will aid the robot's development.

2.2.1 Chassis

Most conventional vehicles use standard wheels that have only two degrees of freedom. These wheels can either roll forwards or backwards. This means it is a non-holonomic vehicle, which essentially means at any given point in the vehicle's state there are certain directions it cannot travel in. This can present a few problems. Firstly, navigation will sometimes involve the adjustment of the vehicle's heading. The vehicle may need to reverse and turn before it can move forward to a certain location. This presents a problem in the robot's efficiency and ability to navigate around a difficult environment, as well as making it more challenging to implement from a software perspective as we would need to factor in situations where these sorts of adjustments would be needed before the robot can proceed. If the robot were to be holonomic however, then it would be able to begin travelling toward any location regardless of its current position. This can be achieved if the wheels our robot's chassis uses are omni-directional.

Watanabe[16], a Professor at Okayama University's Faculty of Engineering who has published a great deal of work in robotics, discusses a few different variations of these omni-directional wheels. One of the more popular variations in his discussion is the universal wheel, sometimes also referred to

as the swedish wheel or mecanum wheel. This wheel is a larger wheel that has many rollers on the rim which allows the wheel to slide in a direction perpendicular to its motor axis.



Fig. 2.1: An omnidirectional wheel, with 90 degree rollers

A robot chassis composing of three or four of these wheels as well as relevant motors should be adequate. A few of the different chassis found during the preliminary research will now be evaluated to find which would be the most suitable for the project.

4WD 58mm Omni Wheel Arduino Robot - £260.78

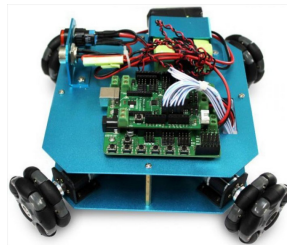


Fig. 2.2: 4WD Omni-Directional Robot Chassis

This chassis features four of the aforementioned omnidirectional wheels along with appropriate motors. The motors have encoders with them which record wheel revolutions, allowing us to use odometric measurements should we connect these encoders to the microcontroller. This kit includes the microcontroller which is an Arduino 328, as well as a nickel metal hydride battery and an appropriate charger. The kit also includes an IO expansion board which would allow us to connect more external devices.

Whilst it would be useful to have most of the equipment decisions done for us, some of this is not necessary. The IO expansion board for example will most likely be needed, as all we're really interested in adding is a sensor for

observations. As well, the price of the kit is quite high given we would also need to purchase a LIDAR sensor on top of it.

3WD 48mm Omni-Directional Triangle Mobile Robot Chassis - £114.34




Fig. 2.3: 3WD Omni-Directional Robot Chassis

Unlike the previous chassis this one features only three wheels rather than four. This is still enough to achieve freedom of movement however. Whilst it doesn't include the additional pieces of the kit the other does (such as a microcontroller) we still have our wheels, a supporting structure and appropriate motors with encoders that will provide us with odometric data. There is plenty of room in the middle for items such as our microcontroller and a power source, and the top plate is an ideal mounting point for our sensor.

Whilst still a bit expensive, the chassis is still on the cheaper side compared to the previous one and some cost is expected to be incurred given that a 12v DC motor with an encoder can cost around £30. One issue encountered while looking for an appropriate robot chassis is that the majority on sale seem to already include microcontrollers and sensors, which launches their price up and also removes a lot of the choice from the product. Looking around the RobotShop and HobbyTronics website for just an empty chassis only yielded this product. Based on these factors, this chassis will be the one used for the product.

2.3 Rangefinding

To achieve self navigation as well as mapping, the robot will need to take observations about its surrounding environment. In order to efficiently map the area and detect obstacles this will need to be performed in a 360 degree manner as well. This sections aims to explore a few of the most common approaches to rangefinding.

2.3.1 Infrared

Infrared sensors work by measuring things via the reflection of infrared light. The sensor will send out some infrared light where it will be reflected off of an obstacle. A receiver will capture this reflected light and depending on factors such as how much light is received back and the triangulation of how the light was received the presence of an obstacle will be determined. There are a number of Infrared sensors available online for very cheap prices, websites like RobotShop and HobbyTronics list most of their sensors between £5 and £10. 360 sensors are incredibly difficult to find, but their low price means purchasing a few would not be a problem.

The range and degrees of space being measured will depend on the sensor's model, but there are a few things the different sensors have in common. First, infrared sensors have both a maximum and a minimum range. Not only does the maximum range need to be factored in as sensor will struggle to pinpoint the location of light that has been reflected at a large range, but the sensor will also struggle to 'see' very close obstacles. In addition, infrared sensors struggle in strong sunlight and seem best suited to primarily indoor tasks.

2.3.2 LIDAR

LIDAR (Light Detection And Ranging) is a technology that uses light sensors to measure distances between the sensor and the target object. It achieves this by sending out light pulses which bounce off of objects back at the sensor where they are collected.

LIDAR has seen some popularity in mobile robotics and the decision to use LIDAR would give the project some interesting options. Some sensors boast very impressive statistics, with some ranges exceeding 10 metres whilst providing several thousand samples per second with 360 degree coverage [11]. Some of these sensors also feature SDKs (Source Development Kits), meaning the core sensor functionality will be accessible straight away allowing development to focus on the robot's logic rather than being bogged down in the belt and braces implementation of preliminary functionality. These features are expensive however, with some sensors being as high as £350.

2.3.3 Ultrasonic

Ultrasonic sensors function by sending out ultrasonic pulses and measuring the amount of time it takes for these pulses to bounce back. Because sonar is sound based rather than light based, it isn't negatively affected by aspects

such as heat, colour or dust. Sensors can interfere with each other however, sonar sensors sending and receives pulses in close proximity to each other can cause issues. A single robot is only being developed, but given that we may need multiple sensors to perform a full 360 degrees of observation this could cause some considerable complications. Sonar sensors can be found relatively cheap depending on the sensor, with sites like HobbyTronics and RoboShop featuring sensors as cheap as £6 ranging up to some that cost around £50.

it would appear that LIDAR, whilst the most expensive option, is what will provide the project with the most functionality and ease of use. Here we will look at a few different LIDAR sensors that could be suitable for the project.

RPLIDAR A2M8 360 Degree Laser Scanner - £301.43



Fig. 2.4: RPLIDAR A2M8

The RPLIDAR A2M8 uses the previous described LIDAR triangulation system, and outputs scan data at 8000 samples per second[10]. It outputs this data via a relevant communication interface, representing scans as distance (what distance between the sensor and the measuring point) and heading (the heading angle of the measurement). It also includes a start flag in its measurement signalling the start of a new scan, which would likely come in useful for processing the scan data as we could simply check this flag to see if incoming data is from a new scan. One of the biggest advantages to employing this sensor would be the SDK it comes with. With full documentation, the SDK allows us to access the sensor's entire functionality straight away. It has appropriate methods for beginning the scanning session, ending it and checking sensor health as well as a few other things. This would save a lot of time in the project as we could focus on logical implementation rather than creating the prerequisites that will be needed for the sensor to do what we need it to do.

The major downside to all of these advantages however is the cost. Sitting

at just above £300, this is an incredibly steep price for the project if we factor in the cost of the other equipment such as the chassis. This problem leads us to the final choice.

RPLIDAR A1M8 360 Degree Laser Scanner - £93.54



Fig. 2.5: RPLIDAR A1M8

Essentially a less sophisticated version of the previous sensor, this iteration of the M1 LIDAR sensor still offers us a 4000 - 8000Hz sample frequency as well as the previously mentioned SDK. Among a few other things, the key differences here are that we have a slightly slower scan frequency (1 - 10Hz vs the A2's 5 - 15Hz) and a few pieces of SDK functionality that aren't available on the less advanced firmware. The key change is that we lack the express scan function, which is similar to the regular scan but it performs at the highest sampling rate the sensor can use.

These downsides are negligible with our product however, ultimately as long as we can easily get observational data at a reasonable rate the project benefits hugely. This functionality at the far more agreeable price point makes this the sensor of choice for the robot.

3. AN INVESTIGATION INTO SLAM

3.1 Introduction

The development of a moving robot is only one half of the end product. As previously mentioned in the project's Terms of Reference the purpose of this project is also to develop a robot that is capable of self navigation and mapping. In order for this to be possible, the robot must be capable of using observations about its environment to build a map. Not only that, but it also must track its own location within this environment. This chapter aims to explore SLAM, a computing problem with research and implemented solutions that deal with exactly that.

3.2 What is SLAM?

SLAM stands for Simultaneous Localization and Mapping, and is something sometimes employed by mobile robots. Localization refers to the ability for the robot to be aware of its location within an environment, for example knowing where it is within a room. Mapping simply refers to building a map of the environment, such as the room the robot is in. SLAM is performing both of these tasks at the same time. Durrant-Whyte and Bailey[8], both academics that have done extensive work in the field of mobile robotics, best sum it up as the ability for a mobile robot to be placed at an unknown location in an unknown environment and then both create a consistent map of the environment and be able to accurately determine its location within this map. Similar definitions can also be found in other articles [5, 7].

3.3 Uses of SLAM in Industry

There are a myriad of potential uses for SLAM, many of which can be seen within the wider industry. Commercially it has been used for products such as vacuum cleaners, Dyson for instance has a small automated vacuum cleaner called the 360 Eye which employs SLAM techniques to map the areas that it moves around and cleans. SLAM has seen many uses in

archaeological contexts owing to its ability to perform exploration without risk to human life, one team [6] developed an underwater robot that used SLAM in order to map underwater cisterns that had been built thousands of years ago. The uses have not gone unnoticed by larger organisations. One of the research organisations within the USA's Department of Defense has held challenges (known as the DARPA Grand Challenge) offering cash prizes as incentives to create high value research. These challenges involve organisations submitting cars that are timed as they race around certain environments. NASA have also made use of it in the past, in 2007 they used an autonomous underwater robot [14] employing SLAM to go to the bottom of the world's deepest sinkhole. The robot used sensors to generate a sonar map of the sinkhole's inner dimensions 318 meters below the surface. The drone also tested technologies that could be used in other more extreme underwater environments such as the oceans under the crust of Europa, one of Jupiter's moons. This has led to increased interest being expressed in using SLAM for planetary rovers, which would allow for the mapping and navigation of different planet surfaces.

3.4 The SLAM Problem

Let's use some key notations to help break down the essentials of the SLAM problem.

\mathbf{t} - Current time.

\mathbf{x}_t - Location and orientation of vehicle.

\mathbf{u}_t - Control vector, for example drive forward 1 metre.

\mathbf{m}_t - True location of i th landmark within the environment.

\mathbf{z}_t - Observation of i th landmark taken at time t .

From these notations we can derive some sets.

$\mathbf{x}_{0:t} = \{ \mathbf{x}_{0:t-1}, \mathbf{x}_t \}$ - History of all vehicle locations.

$\mathbf{u}_{0:t} = \{ \mathbf{u}_{0:t-1}, \mathbf{u}_t \}$ - History of odometrical information pertaining to the robot's movement.

$\mathbf{m} = \{ \mathbf{m}_1, \mathbf{m}_2, \dots, \mathbf{m}_n \}$ - Set of all landmarks.

$\mathbf{z}_{0:t} = \{ \mathbf{z}_{0:t-1}, \mathbf{z}_t \}$ - Set of all landmark observations.

Ultimately we want to use the robot's control inputs and observations to receive a map of the environment and the robot's path.

SLAM is generally approached probabilistically. This means that the attempted solutions factor in uncertainties within the data. Therefore, solutions to the SLAM problem will not act with exact certainties. For example, rather than saying the robot is in an exact location we would treat it as a

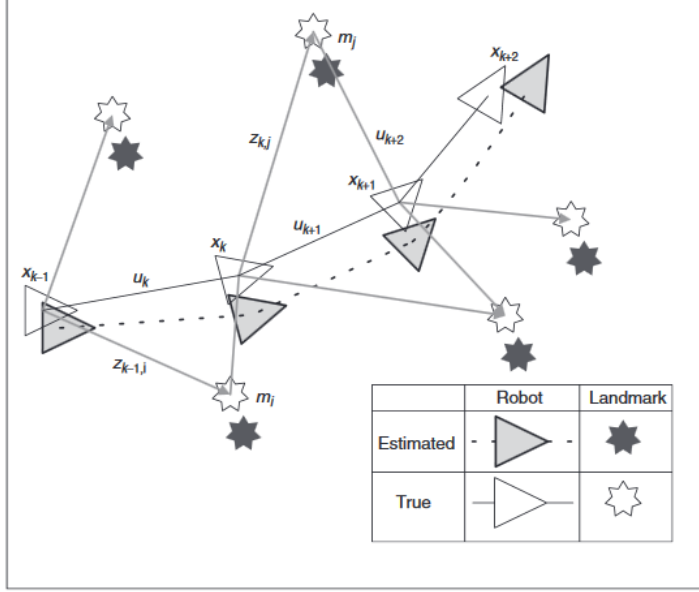


Fig. 3.1: The SLAM problem illustrated [8]

general location it is the most likely to be in. We want the probability distribution to be an estimation of current vehicle location and landmarks based on landmark observations and control inputs or odometrical data.

There are variations within the SLAM problem however. At a broader level, SLAM problems generally come in one of two flavours. These are full SLAM and online SLAM.

3.4.1 Full SLAM

Full SLAM involves using landmark observations and data relevant to discerning the robot's current position in order to determine the robot's entire path. It can be written as such -

$$p(\mathbf{X}_{0:t}, \mathbf{m} \mid \mathbf{Z}_{0:t}, \mathbf{U}_{0:t})$$

3.4.2 Online SLAM

Online SLAM differs slightly in that it seeks to determine the robot's current location rather than the robot's entire path. It can be written as such -

$$p(\mathbf{x}_{0:t}, \mathbf{m} \mid \mathbf{Z}_{0:t}, \mathbf{U}_{0:t})$$

3.4.3 SLAM Taxonomy

The possible differences in the SLAM problem don't end there. Depending on different factors there are also different sub approaches to the SLAM problem. Below are some common variants.

Volumetric versus Feature-Based

Volumetric SLAM samples the map as a resolution high enough to allow a photo realistic reconstruction of the environment [13]. The map gained from this is generally high dimensional, but as the area increases in size and scale the map becomes significantly more complex. Feature-based SLAM simply extracts key features from measurements, with the map being solely made up of these features. This might be used if it is decided that only key features are of interest or if large parts of the mapped space are empty, as volumetric SLAM in these cases would be storing voxels that hold no geometric data of significant value [15]. As you would expect, this is quicker and more efficient but discards a lot more data than volumetric.

Topological versus Metric

Topological SLAM captures key places and their connectivity to other measured locations. Metric SLAM attempts to model the environment using geometrically accurate positioning. Metric SLAM would show the accurate positioning of various environmental features, topological would show them in relation to each other (e.g. place A is adjacent to place B) [13]. A good analogy would be a bus route map (topological) that displays the different stops versus showing the bus' actual route on a geographical map of the area (metric).

Known versus Unknown Correspondence

This entails relating the identity of sensed landmarks to other sensed landmarks. In known correspondence the identity of the landmarks is known, if a landmark is observed and then the robot moves and observed another landmark, the identity of the landmarks being known would let us to determine if this landmark observation is the one we saw before or a newly observed one. Unknown correspondence would simply mean that in this situation we wouldn't know.

Static versus Dynamic

Static and Dynamic here refers to the environment. Static SLAM algorithms assume that no changes will take place in the environment whereas Dynamic SLAM methods allow for these changes to take place.

Small versus Large Uncertainty

The ability to represent uncertainty is another aspect. Some SLAM approaches will assume a very low uncertainty in the robot's location estimation. This might be when the robot is moving up and down a simple path, as it's much easier to guess where it's likely to be. Large amounts of uncertainty might occur however in more complex environments where locations can be reached from multiple different directions, or if the robot starts travelling in more complex paths that intersect with each other.

Activate versus Passive

Active SLAM involves the robot actively exploring its environment whilst it builds a map of it. Passive SLAM is when the SLAM algorithm is purely used for observation, with some other entity controls the robot's movement.

Single-Robot versus Multirobot

Single-robot simply refers to SLAM happening only on a single platform. Multirobot SLAM (sometimes known as cooperative SLAM) involves multiple robots often communicating with each other to merge their maps into a larger collective model.

There are multiple different paradigms that can be used to solve the SLAM problem, and each of these paradigms has many different implementations. One technique that has seen usage for solving the SLAM problem in autonomous mobile robotics is the Canonical Scan Matcher, generally referred to as CSM. This is the solution that we will be looking to implement for the project.

3.5 A Look At A Potential Solution

3.5.1 Introduction

As previously discussed there are a myriad of variations on the SLAM problem, and there are a few different paradigms used to implement solutions to

it. During some preliminary research, one method of SLAMming came up that seemed like it would be suitable for the project called CSM.

3.5.2 CSM

CSM is an open-source C implementation of an ICP variant known as PIICP. It has seen usage for industrial prototypes of autonomous robotics, one of the most notable examples of this being Kuka, a German manufacturer of industrial robotics. It isn't quite a fully fledged SLAM solution, instead performing pairwise scan-matching on scan data that is fed into it. Before the PIICP algorithm it is based on can be explained, we must first look at the base ICP algorithm.

ICP

ICP stands for Iterative Closest Point, and it refers to an algorithm that attempts to minimize the difference between two clouds of points, something known as point matching or point set registration. In essence, it means getting one set of points aligned to another set of points. Besl and McKay present the algorithm as a statement [2] in their paper, and ICP is shown in terms of C++ in the Mobile Robot Planning Toolkit [3].

We first of all have a source map, and then we have a map that we wish to align to it which we will refer to as the reference map. We then go through each point in the source map and which point in the reference map is the closest to it. We then determine a transformation which would minimize the mean squared error (the average squared difference) between the two points before applying this transformation to the reference set and then going through this set of steps again. This is repeated until the mean squared error falls below a certain threshold.

PIICP

Censi explains PIICP in a series of steps [4]. To start with, we take a reference scan, a second scan and a first guess for the translation needed to try and match the two maps. We then generate a polyline of the reference map by connecting sufficiently close enough dots (using a threshold). Following this, a loop similar to the one in the base ICP algorithm begins.

We first determine the coordinates of the second scan in the first scan's frame of reference using our initial translation guess. Then, for each point in the second scan, we determine the two closest points to it in the first scan. We trim any outliers within these matches, and use the sum of the

squares of the distances from the points to the line containing the matches two points to find the error function. PIICP then uses an algorithm in order to minimize this error function which we now use as our translation guess. This new guess is used on the next iteration of the algorithm. This loop continues until either we have a convergence between the maps or a loop is detected as no further progress is being made.

3.5.3 Suitability of CSM

Firstly we can see that CSM is a pure C implementation of the previously described algorithm. This is excellent for the project, not just for the benefits of C such as it being a relatively quick language but also because it should be directly usable with an embedded board which would be the ideal choice for controlling the robot. Had it been in any other language we might have needed to use some sort of shared library to get it to work which likely would have slowed things down and potentially made the robot less effective.

CSM is however not a product of a professional company dealing in these matters, its open source nature could put some doubts with regards to its usefulness or reliability. However, it was developed by Dr Andrea Censi, someone who is a Deputy Director for the Chair of Dynamic Systems and Control at ETH Zurich meaning it is far from an amateur project. As previously mentioned as well it has been adopted by the German robotics company Kuka, so clearly it has enough merit to be used at the industrial level. Ultimately it would appear CSM is an ideal choice for the robot's localization and mapping functionality.

3.6 An Investigation Into SLAM - Conclusions

First and foremost we can safely establish that the SLAM problem is what we are addressing with regards to the implementation of the robot's ability to track its own location whilst mapping its environment. In addition to this we understand the fundamentals of the SLAM problem. This will massively benefit development, as being aware of having to store details internally such as wheel revolutions gained via odometric sensors will allow us to cut down on time spent during development having to rewrite core pieces of functionality to make room for this.

4. REVIEW OF TOOLS AND TECHNIQUES

4.1 Dealing with Scan Data

One aspect that needed to be considered was the drone's behaviour whilst scanning. The initial thought was that the drone would move around, scan and save the scan results all simultaneously. To investigate the viability of this tests were performed to see if this was possible with the constraints we had, the most notable constraints being how quickly the MBed board is able to write scan data compared to how quickly it would be receiving it from the LIDAR sensor. Based on this it was decided it would be best if the LIDAR stopped and took readings for a small period of time, with these readings being stored in the RAM and then written to internal files afterward.

4.2 Dead Reckoning

Odometry is the usage of data from motion sensors to estimate an object's position. One such implementation of this that will be looked at for the project is dead reckoning. Dead reckoning tracks the robot's position by using data from wheel encoders that count the number of wheel rotations performed during operation. From this, the internal tracked position of a robot can estimate its new position after periods of movement. Given that the chassis being used for the project has wheel encoders as part of the wheel motors, this approach would allow us to perform odometry without needing the use of additional kit. Dead reckoning is not without issues however. Most pressingly it does not account for wheel slippage. If the robot has a poor grip on the ground and the wheels slip, then the wheel rotation doesn't accurately correspond to the robot's location [5]. These issues would compound as well. As more and more slippage happens, the robot's internal position would become less and less accurate to where it actually is.

4.3 Software Framework

With regards to the software that will be running on the robot itself, it makes sense to implement it as an operating system. Appropriate tasks will be made to deal with things such as the robot's movement and interaction with the LIDAR sensor. This section aims to explain our potential options for how this operating system will be implemented before coming to a conclusion on which of the options will be used and why.

4.3.1 MBED RTOS

The MBED Real-Time Operating System is an open source operating system for platforms using Arm microcontrollers. It is specifically designed for IoT (Internet of Things) devices, which the OS documentation[1] define as low-powered, constrained devices which require access to the internet.

Aside from the usual features you'd expect from an operating system (threads, semaphores, etc), MBED OS also features C++ based network sockets for the sending and receiving of data, network interface APIs for interfacing with things such as ethernet or wi-fi as well as bluetooth support. One aspect of the Terms of Reference dealt with precisely how map data would be handled, with two of the three options involving wireless transmissions. Should the project go in this direction, MBED OS' numerous APIs for dealing with this would be immensely helpful. All of this may be overkill however, communication without the use of these APIs isn't impossible and if we don't use wireless communication then all of these features will be of no use anyway. Should another method of dealing with map data such as locally storing it, a much simpler OS would be more appropriate.

4.3.2 μ C/OS-II

μ C/OS-II (which will hereon be referred to as Micro C OS) is a very simple real time operating system designed for use with embedded systems. Labrosse[9] discusses a number of different features of Micro C OS in the documentation in addition to ones you would typically find in an operating system (semaphores, task management, etc). Labrosse discusses how Micro C OS is able to be used on a wide variety of microprocessors owing to its design, allowing it to be highly portable. In addition, Micro C OS's scalability is discussed, allowing for only the services required in the operating system's host application to be used. This feature in particular would come in useful for the project given the use of a microcontroller, as it would allow us to cut down memory usage to only what we need which should help performance issues from arising.

4.3.3 Microcontroller

5. CONCLUSIONS

Based on the different aspects of mobile robotics and SLAM that have been looked at as well as the critique of the various tools and techniques that have been employed, we can outline the basic product requirements that will need to be achieved in the course of the product's development. First and foremost the robot must be capable of basic navigation. The drone must be capable of observing the environment using rangefinding techniques. Finally, the robot must be capable of processing data acquired through this rangefinding process to perform localization and mapping. Finally, the retrieved observational data must be processed and fed into the CSM software to generate a map. For this to happen the robot needs to be able to somehow store the observational data it retrieves from the LIDAR sensor, and we also need a medium to put the data into CSM and display the output. From this outline we can get these basic project requirements -

- The robot must be capable of movement
- The robot must be capable of observation
- The robot must be capable of storing observational data
- The observational data must be processed into a map

Part II

SYNTHESIS

6. INTRODUCTION

Now that the relevant product fields are understood to a sufficient degree and the product's needs have been established we can begin to plan out how we will achieve the project's objectives. First we will establish the methodological approach that will structure the product's development. Then, for each of the core product requirements we will look at a high level design overview of how the requirement will be met, the actual implementation of this design, and testing to evaluate how well this requirement has been satisfied by this implementation.

7. METHODOLOGICAL APPROACH

The project employed a prototyping methodology for development. First, we must perform an investigation into the system requirements, which was performed in the analysis with a list of specific core requirements being outlined in the conclusion. Following this the first prototype is built, which will resemble an incredibly basic scaled down version of how the final system should ideally look. This prototype is then thoroughly evaluated, with potential changes that would bring the prototype closer to the final system being figured out. Finally, these changes are then implemented and the prototype is evaluated once again. This is repeated until the product has reached its ultimate goals.

This methodology was employed partially due to the hardware nature of the product. Key features of the robot hinged on aspects like movement and observation being possible, so it was important to get a prototype that has this basic functionality up and working and quickly as possible. The prototyping approach allowed a pure focus on getting these functions working, and once they were the robot could be improved iteratively.

7.0.1 Initial Prototype

As previously stated, this methodology involves an initial prototype that all future prototypes will be an iteration of. The initial prototype of the project will involve the basic, primary construction of the robot. This will first involve the basic chassis assembly, followed by connecting relevant components to each other and then ensuring that they are all powered. Once this is done, we'll hopefully have an incredibly crude robot that won't be capable of much, but should hopefully serve as a solid foundation for future development toward the project goals.

A similar approach will be followed for processing the map data. It won't be developed simultaneously at first as the robot needs to be capable of storing observational data from the LIDAR before the program can actually do anything, however it will start to be put together once the robot crosses this developmental threshold.

8. DESIGN

Before implementation of the specific project aims can be implemented, we first need the initial prototype that we can begin iteratively improving. Therefore, it's logical to design the initial robotic prototype first. What follows is an overview of how the initial robot prototype will be designed, followed by a breakdown of each of the individual project aims will be met.

8.1 Initial Prototype

Here will be the design for the base robot. The aim here is to achieve a solid foundation that all development can build on in order to meet the project objectives.

8.1.1 Hardware

Chassis

First off will be the basic assembly of the three wheeled omnidirectional chassis. The chassis is comprised of two triangular metal plates, joined together by metal rods that are screwed into pre drilled holes that line up to eachother. The lower platform is where the motors and mounting points for the omnidirectional wheels are found, so once the plates have been connected the wheels will be pushed onto these mounting points and locked into place.

Now it's time for the microcontroller setup. The microcontroller used in this project is the FRDM-K64F, chosen for it's relatively low cost, small form factor and compatibility with the Micro C Operating System which is being employed for the robot's core program. To control the robot we'll also need a motor driver. The dfRobot Quad Motor Driver Shield is being employed for this project, it can be obtained from Amazon for around £13. It was chosen for this relatively low cost, the easily available documentation and the fact that it can easily plug into the FRDM-K64F, the microcontroller of choice for this project. The specifics behind how the shield will be used will be discussed during the movement design section, but in short it allows us to manipulate the energy being sent to the individual wheel motors which will

afford us control over how they work and as such control over the robot's movement. Once these two components have been fitted together, the power and ground cables from each of the chassis motors will be plugged into the motor driver shield. Fig 8.1 from the shield's documentation shows an example of this setup with four motors.

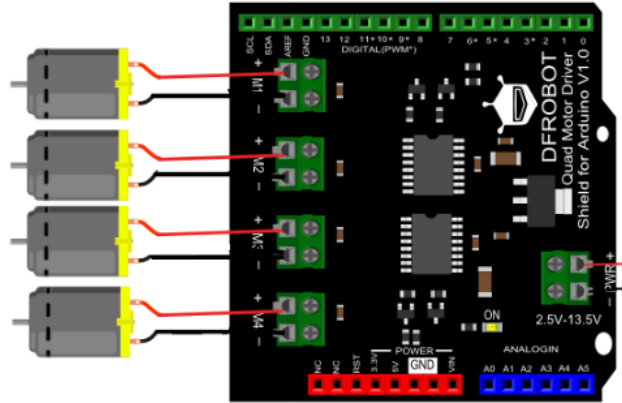


Fig. 8.1: Example shield setup

The assembly shouldn't be overly complex, no soldering should be needed to connect components so it should be mostly a case of fitting things together.

Power

The hardware components that will need powering are the three motors used to drive the omnidirectional wheels, the microcontroller, and the LIDAR sensor. The LIDAR sensor has two separate pins that require power, one powering the motors that drives the LIDAR sensor and the other being the actual range finder itself. Table 8.1 has a run down of these hardware components and the voltages that they use.

Component	Voltage
3x DC Coreless Motor	12V
FRDM-K64F	1.71 to 3.6V
RPLIDAR Scanner	5 to 5.5V
RPLIDAR Motor	5 to 10V

Tab. 8.1: Components and respective voltages

To save on cost and complexity, it would be ideal to only use a single battery for the robot's power source. A single power source will be used for the robot,

a battery holder containing 8 1.5V batteries will give us the 12V we need for the motors. Then, a step down voltage regular will be used to lower the voltage required for the other components. Fig ?? has an overview of this.

8.1.2 Software

The software for the actual robot will be written in C++, compiled and deployed onto the microcontroller with the mbed SDK. At its foundation, it will be a Micro C OS with a series of configured tasks to perform various aspects of the robot's functionality. As you would expect, these tasks will come with their own memory tasks and will be designated with appropriate priorities. For the initial setup, we only need to make a skeleton OS to ensure we can properly compile and deploy code onto the microcontroller. Some relevant data structures and variables for task priorities and memory stacks, as well as a single task that prints hello world would be fine for this.

8.2 Designing for Requirements

Once this incredibly basic initial prototype is in place, we can begin to move toward truly fulfilling the project requirements. What follows is an overview of how each of the different project requirements will be met, with appropriate explanations toward the hardware and software employed.

8.2.1 Movement

The first of the three product aims outlined in the Analysis is that 'the robot must be capable of movement'.

Hardware

The previously mentioned dfRobot Quad Motor Driver Shield comes into play here. As shown in fig 8.1, the motors power and ground cables will connect to the appropriate pins on the shield. The motors can be manipulated once they receive power in this fashion. The shield is able to affect the electricity being sent to the motors by changing its polarity and by using pulse width modularity. By changing the pin to HIGH or LOW, we can affect the direction that the motor spins in (forward or backwards) and pulse width modulation allows us to affect the speed of the motor.

Software

In order to manipulate the motors we'll need some appropriate variables we can use to refer to the pins that the motor power and ground cables are connected to.

8.2.2 Observation

Hardware

Only one range finder is being used to gather the observation data, the RPLIDAR A1M8 LIDAR sensor. The sensor is composed of a platform with a motor system that spins the range scanner as it takes readings, as well as some pins that can be used for communication. Fig 8.2 illustrates these components.

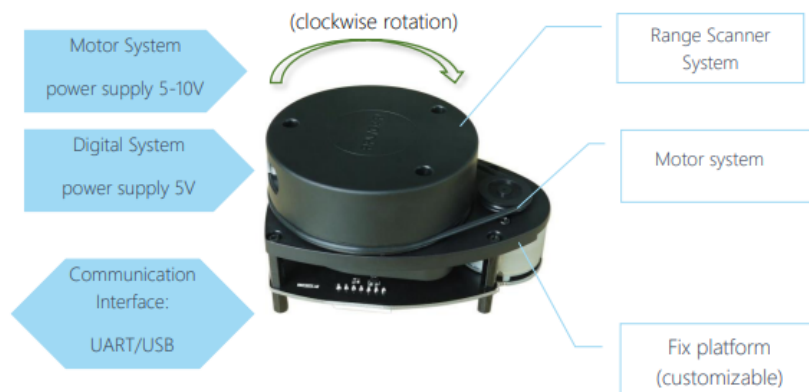


Fig. 8.2: Example shield setup

Software

8.2.3 Processing Observational Data

8.3 Designing for Requirements

8.3.1 Movement

Hardware

Software

For this, the three wheeled omni directional chassis will be employed. This chassis was chosen due to the reduced cost compared to most other available chassis, and the omnidirectional wheels were ideal as the holonomic properties of the robot will allow it to move in any direction from any position without the need to first change its heading. To control the motors that will drive the wheels, the FRDM K64F MBED microcontroller will be used. The board is small, relatively cheap and will support the Micro-C Operating System that is going to be used as a structure for the robot's program. The motor driver

From this, the robot will achieve an ability to move around an environment using basic navigation and the first of our three objectives will be met.

8.3.2 Observation

The second of the three product aims is that 'the robot must be capable of observation'.

The RPLIDAR A1M8 360 Degree Laser Scanner will be used for the range finding aspect of this. Chosen for its high scan frequency and readily available SDK, it will be connected to the appropriate microcontroller pins so that it can receive power and exchange information over a serial connection.

This will allow the microcontroller access to range finding data and make it capable of utilizing the LIDAR sensor to observe the environment. A successful implementation here will achieve the second of our three product objectives.

8.3.3 Processing Observational Data

The last of the three product objectives is that 'the robot must be capable of processing observational data'.

The plan for this is to use the CSM software described in the Analysis to process the robot's observational data. Once the robot has taken its observations, they will be saved onto an SD card that has been plugged into the FRDM K64F microcontroller. These observations will then be plugged into a computer where a created program will (once the user has directed it to) load this data and feed it into the CSM software. Once CSM has output an appropriate map, the program will display this to the user.

Following a successful implementation of the above procedure, we will be capable of taking observational data and processing it into a viewable map. This will satisfy the last of the three project requirements.

Now that we have a high level understanding of how each of the project objectives will be met, there will be a more thorough planning of how each of the hardware and software components will be implemented.

8.4 Hardware

This section aims to outline the hardware components selected for the project and to describe in a more detailed manner how the robot itself will be constructed.

8.4.1 Chassis

Structure

The chassis is made up of an upper and a lower triangular platform, connected by small metal rods that screw into pre-drilled holes on the platforms. The lower platform features three 12 volt motors as well as mounting points for the omnidirectional wheels, which should lock into place once they are pressed onto it. The space between the two platforms is where the robot's microcontroller and power supply will be housed, and the bulk of any wiring that needs to be done should ideally be here as well. On top of the upper chassis platform will be the LIDAR sensor used for range finding. It's important that the top platform remain relatively clean, as components or wiring being too close to the LIDAR may block the light it sends out and cause issues with the range finding process.

The assembly shouldn't be overly complex, no soldering should be needed to connect components so it should be mostly a case of fitting things together.

8.4.2 Microcontroller

FRDM-K64F

The FRDM-K64F will be employed to be the 'brain' of the robot. It's small, relatively cheap and compatible with the Micro C operating system which will run the tasks needed to be used for the robot's operation. As well, the freely available mbed SDK used for developing on these boards will make changing and redeploying code onto microcontroller quick and easy, which will help minimize time spent programming the next prototype iteration.

dfRobot Quad DC Motor Driver Shield

To manipulate the robot the way we want, we cannot simply supply all the wheels with full power all the time. This will make them constantly spin at the maximum rate. Omnidirectional navigation relies on having different wheels spin in different directions, often at different speeds. To achieve this, the motor driver shield will sit on top of our microcontroller. It features pins for each of the chassis motor's power and ground cables, and once plugged in we can run code on the microcontroller to change whether these pins are HIGH and LOW as well as the pulse width modulation of these pins. It was chosen for its ease of use and available documentation, as well as its immediate compatibility with the FRDM-K64F, installation will be as easy as plugged it into the board's GPIO pins. This will allow us to change both the direction and the speed of each of the individual wheels, which will help us achieve our omnidirectional navigation.

8.4.3 Sensor

The RPLIDAR A1M8 sensor will sit on top of the chassis and will be connected to the microcontroller. The microcontroller will provide the LIDAR with power, and a serial connection between the two components will allow the microcontroller to send and receive information from the sensor. As mentioned in the power section, the LIDAR features two different pins that require power. These are the LIDAR motor and the LIDAR core, and they will receive power that has been stepped down from the 12V battery pack that is being used.

8.5 Software

8.5.1 Robot

The software for the actual robot will be written in C++, compiled and deployed onto the microcontroller with the mbed SDK. At its foundation, it will be a Micro C OS with a series of configured tasks to perform various aspects of the robot's functionality. As you would expect, these tasks will come with their own memory tasks and will be designated with appropriate priorities.

Sensor

In order to interface with the RPLIDAR A1M8, SLAMTEC's own SDK will be used. The SDK comes in the form of header files which appropriately implement the functionality needed to send requests and receive information from the LIDAR sensor. Table 8.2 has a manifest of the SDK and the functionality that it provides.

File	Purpose
rplidar.h	Parent file for subsequent header files
rplidar_driver.h	Provides RPLidarDriver class for interfacing with sensor
rplidar_protocol.h	Defines structs and constants for the LIDAR protocol
rplidar_cmd.h	Defines request/answer structs for LIDAR protocol
rptypes.h	Platform independent structs and constants

Tab. 8.2: RPLIDAR SDK files

8.5.2 Map Building

FRDM-K64F

The FRDM-K64F will be employed to be the 'brain' of the robot. It's small, relatively cheap and compatible with the Micro C operating system which will run the tasks needed to be used for the robot's operation. As well, the freely available mbed SDK used for developing on these boards will make changing and redeploying code onto microcontroller quick and easy, which will help minimize time spent programming the next prototype iteration.

8.5.3 Sensor

The RPLIDAR A1M8 sensor will sit on top of the chassis and will send data to the microcontroller over a serial connection. Once this connection has been established, the microcontroller will be able to send request to the LIDAR. An overview of the possible requests that can be sent to the LIDAR can be seen in table 8.3.

Function	Purpose
Scan	Begin scanning
Stop	Stop scanning
Reset	Reboot RPLIDAR core
Force Scan	Begin scanning without checking rotation speed
Get Info	Output device info (e.g. serial number)
Get Health	Output device health info
Get Samplerate	Output single sampling time
Get Lidar Conf	Get LIDAR configuration

Tab. 8.3: RPLIDAR SDK overview

9. IMPLEMENTATION

10. TESTING

Part III

EVALUATION

11. INTRODUCTION

12. PRODUCT EVALUATION

13. PROCESS EVALUATION

14. CONCLUSIONS AND RECOMMENDATIONS

Part IV

APPENDICES

BIBLIOGRAPHY

- [1] *An introduction to Arm Mbed OS 5*. arm MBED. Available at: <https://os.mbed.com/docs/mbed-os/v5.10/introduction/index.html> (Accessed 13 December 2018).
- [2] Paul J Besl and Neil D McKay. Method for registration of 3-d shapes. In *Sensor Fusion IV: Control Paradigms and Data Structures*, volume 1611, pages 586–607. International Society for Optics and Photonics, 1992.
- [3] Jose Luis Blanco. Iterative closest point (icp) and other matching algorithms, 2013. Available at: [https://www.mrpt.org/Iterative_Closest_Point_\(ICP\)_and_other_matching_algorithms](https://www.mrpt.org/Iterative_Closest_Point_(ICP)_and_other_matching_algorithms) (Accessed 12 December 2018).
- [4] Andrea Censi. An icp variant using a point-to-line metric. 2008.
- [5] Howie Choset and Keiji Nagatani. Topological simultaneous localization and mapping (slam): toward exact localization without explicit localization. *IEEE Transactions on robotics and automation*, 17(2): 125–137, 2001.
- [6] Christopher M Clark, Christopher S Olstad, Keith Buhagiar, and Timmy Gambin. Archaeology via underwater robots: Mapping and localization within maltese cistern systems. In *Control, Automation, Robotics and Vision, 2008. ICARCV 2008. 10th International Conference on*, pages 662–667. IEEE, 2008. Available at: https://digitalcommons.calpoly.edu/cgi/viewcontent.cgi?referer=https://scholar.google.co.uk/&httpsredir=1&article=1055&context=csse_fac (Accessed: 02 December 2018).
- [7] MWM Gamini Dissanayake, Paul Newman, Steve Clark, Hugh F Durrant-Whyte, and Michael Csorba. A solution to the simultaneous localization and map building (slam) problem. *IEEE Transactions on robotics and automation*, 17(3):229–241, 2001.
- [8] Hugh Durrant-Whyte and Tim Bailey. Simultaneous localization and mapping: part i. *IEEE robotics & automation magazine*, 13(2):99–110,

2006. Available at: <http://everobotics.org/pdf/SLAMTutorial.pdf> (Accessed 02 December 2018).
- [9] Jean J Labrosse. *MicroC/OS-II: The Real Time Kernel*. CRC Press, 2002.
- [10] *RPLIDAR A2 - Introduction and Datasheet*. SLAMTEC. Available at: https://www.robotshop.com/media/files/pdf2/1d208_slamtec_rplidar_datasheet_a2m8_v1.1_en_2_.pdf (Accessed 14 December 2018).
- [11] SLAMTEC. URL: <https://www.slamtec.com/en/Lidar/A1> (Accessed: 06 December 2018).
- [12] Cyrill Stachniss. Introduction to robot mapping, October 2013.
- [13] Sebastian Thrun and John J Leonard. Simultaneous localization and mapping. *Springer handbook of robotics*, pages 871–889, 2008.
- [14] Carnegie Mellon University. Nasa-funded robotic sub finds bottom of world’s deepest sinkhole. *ScienceDaily*, 2007. Available at: <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20190000015.pdf> (Accessed 02 December 2018).
- [15] Emanuele Vespa, Nikolay Nikolov, Marius Grimm, Luigi Nardi, Paul HJ Kelly, and Stefan Leutenegger. Efficient octree-based volumetric slam supporting signed-distance and occupancy mapping. *IEEE Robotics and Automation Letters*, 3(2):1144–1151, 2018.
- [16] Keigo Watanabe. Control of an omnidirectional mobile robot. In *1998 Second International Conference. Knowledge-Based Intelligent Electronic Systems. Proceedings KES’98 (Cat. No. 98EX111)*, volume 1, pages 51–60. IEEE, 1998.