


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YONGHAO TECHNOLOGY. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YONGHAO TECHNOLOGY, IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	临时发行	07/26/2021	801072

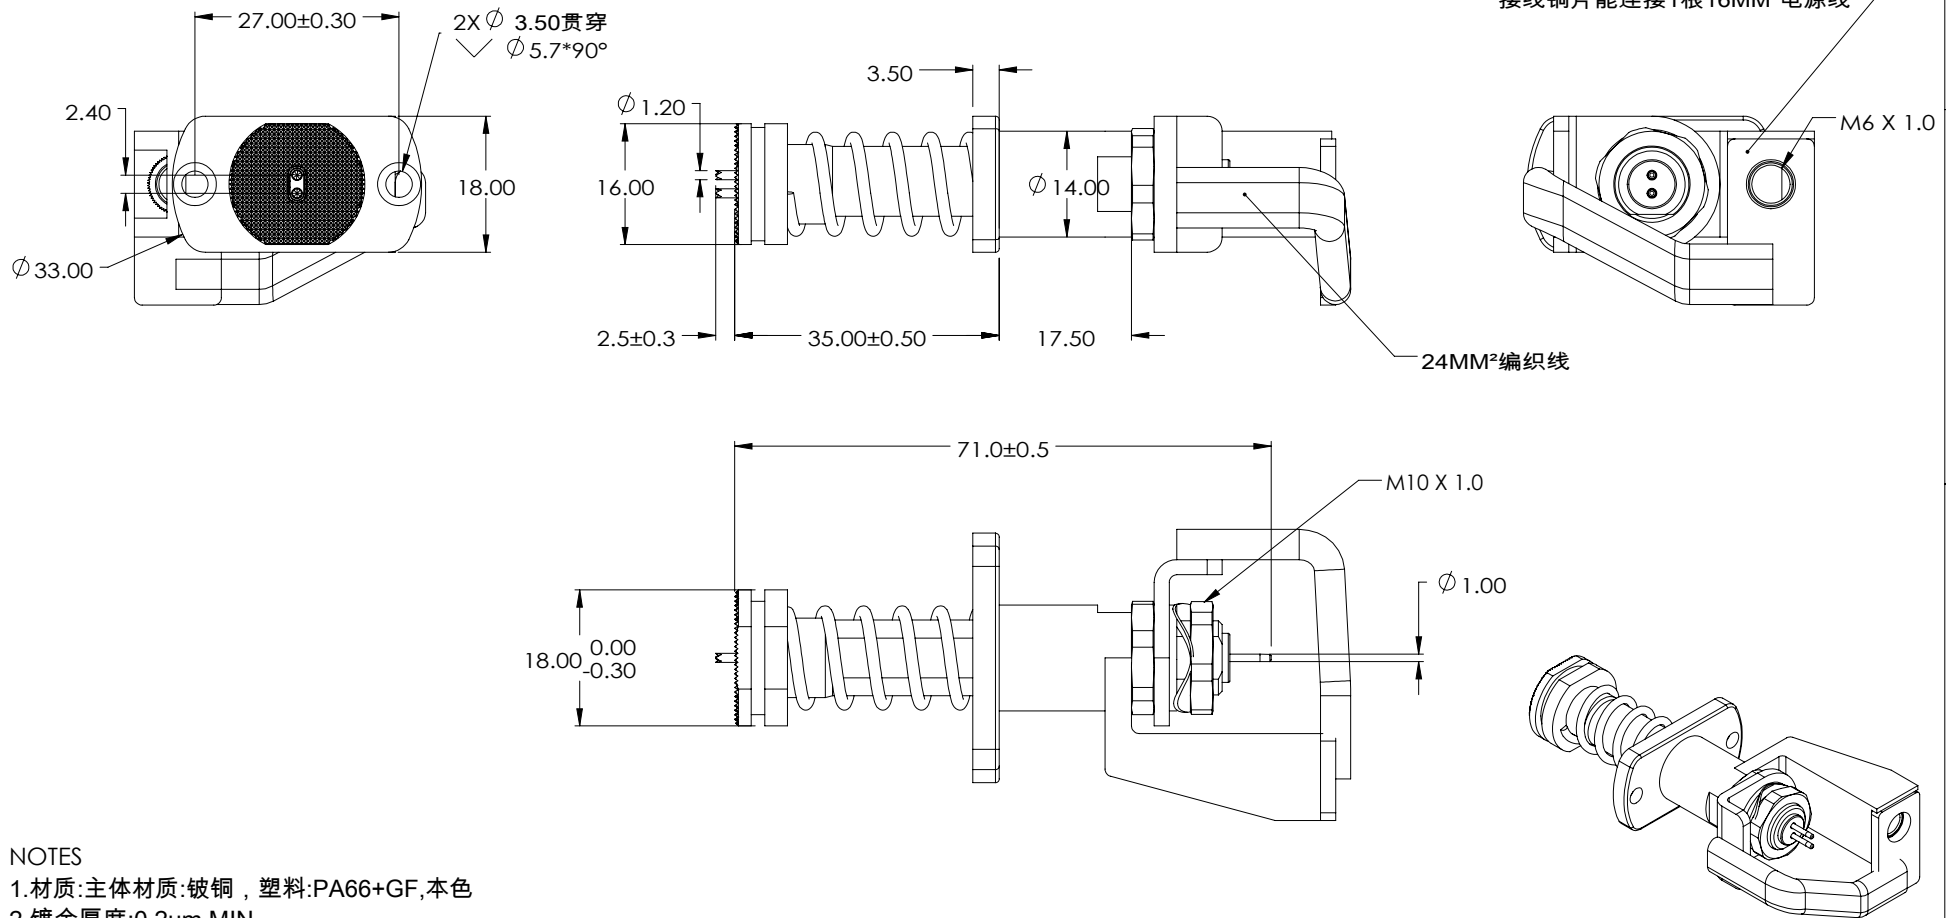

#### NOTES

- 1.材质:主体材质:铍铜, 塑料:PA66+GF,本色
- 2.镀金厚度:0.2µm MIN.
- 3.接触电阻:1.0mΩ MAX.
- 4.温升:20°C MAX.
- 5.寿命:30000 MIN.
- 6.最大工作行程:10MM MIN.
- 7.弹力:电流针下压5MM,达到60N ±15%  
电压针下压2.5MM,单针达到5N±15%
- 8.未注公差参照:C级

PERMISSIBLE DEVIATIONS FOR BASIC SIZE RANGE								
TOLERANCE CLASS	> 0.5-3	> 3-6	> 6-30	> 30-120	> 120-400	> 400-1000	> 1000-2000	> 2000-4000
FINE F	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	-
MEDIUM M	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
COARSE C	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4
VERY COARSE V	-	±0.5	±1	±1.5	±2.5	±4	±6	±8
FOR NOMINAL SIZE BELOW 0.5MM, THE DEVIATION SHALL BE INDICATED ADJACENT TO THE RELEVANT NOMINAL SIZE(S)								
ANGULAR TOLERANCES: ALL = ± 1°								

APPROVALS		DATE		苏州东衡数控电子有限公司 SUZHOU DONG HENG NUMERICAL CONTROL ELECTRONICS CO., LTD.	
DRAWN BY 801072		07/26/2021		CATEGORY 类别:	
CHECKED BY 801019		07/26/2021		探针	
APPROVED BY 800983		07/26/2021		PRODUCT DESCRIPTION 产品描述:	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		WEIGHT(G)		DH20202-80A, 带编织线	
PROJECTION		SIZE A4	SCALE: 1:1	PART NO. DH20202-80A	REV. 1
		DIMENSIONS UNIT: MM		CAD FILE: DH20202-80A.SLDDRW	SHEET 1 OF 1