


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF YONGHAO TECHNOLOGY, ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF YONGHAO TECHNOLOGY, IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	出版临时发行	09/25/2021	801072

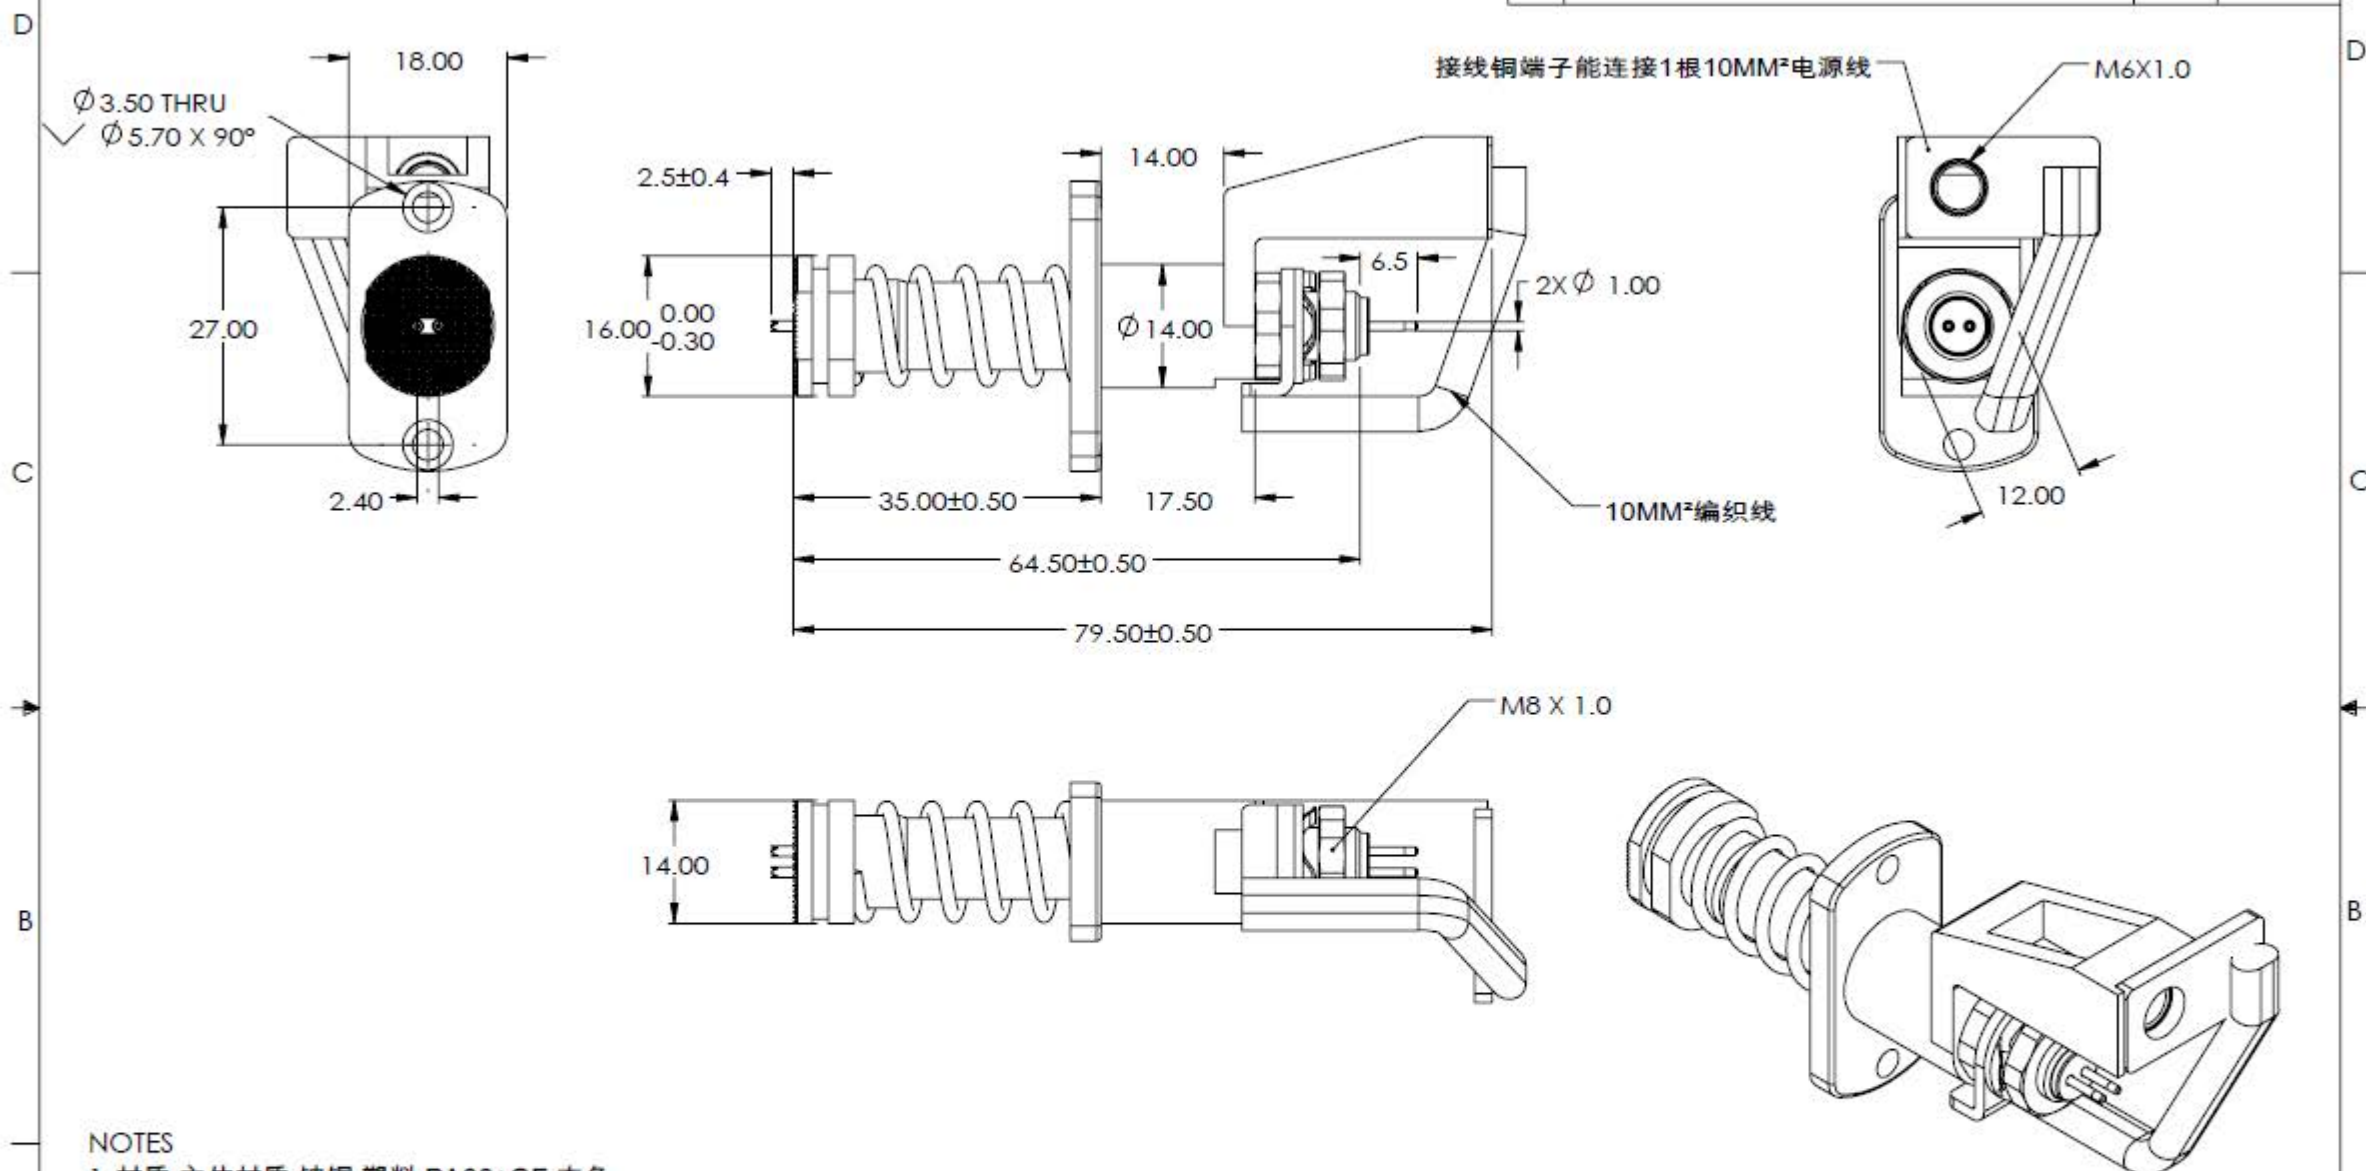

NOTES

1. 材质: 主体材质: 镀铜, 塑料: PA66+GF, 本色
2. 镀金厚度: 0.2 μ m 最小 (局部镀金)
3. 接触电阻: 1.5m Ω 最大
4. 温升: 20 $^\circ$ C 最大
5. 寿命: 30000 最小
6. 最大工作行程: 10MM 最小
7. 弹力: 电流针下压5MM, 达到60N \pm 15%
电压针下压2.5MM, 单针达到5N \pm 15%
8. 未注公差参照: C级

PERMISSIBLE DEVIATIONS FOR BASIC SIZE RANGE								
TOLERANCE CLASS	> 0.5-3	> 3-6	> 6-30	> 30-125	> 125-400	> 400-1000	> 1000-2000	> 2000-4000
FINE F	± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
MEDIUM M	± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
COARSE C	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
VERY COARSE V	-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8
FOR NOMINAL SIZE BELOW 0.5MM, THE DEVIATION SHALL BE INDICATED ADJACENT TO THE RELEVANT NOMINAL SIZE(S)								
ANGULAR TOLERANCES: ALL $\pm 1^\circ$								

APPROVALS		DATE	 苏州东衡数控电子有限公司 SUZHOU DONG HENG NUMERICAL CONTROL ELECTRONICS CO., LTD.	
DRAWN BY		801072		
CHECKED BY		801019	CATEGORY 类别:	
APPROVED BY		800983	探针	
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		WEIGHT(G)	PRODUCT DESCRIPTION 产品描述:	
PROJECTION			DH20202-50A, 带编织线	
SIZE		SCALE	PART NO.	REV.
A4		1:1	DH20202-50A	1
DIMENSIONS UNIT: MM		CAD FILE	DH20202-50A.SLDDRW SHEET 1 OF 1	