SATURN V APOLLO FLIGHT CONFIGURATION

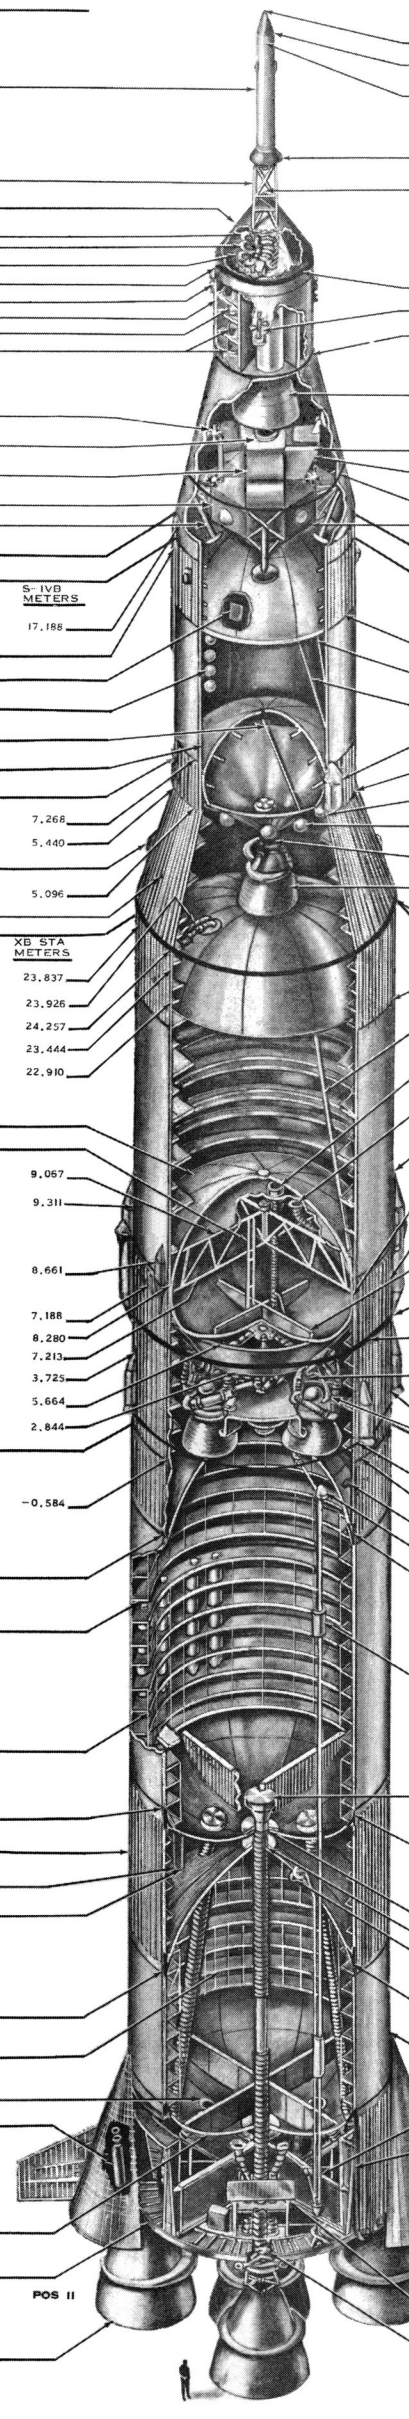

VEHICLE STATION IN:	INCHES	METERS
SPACECRAFT (NORTH AMERICAN AVIATION)		
LES JETTISON MOTOR & LAUNCH ESCAPE SYSTEM		
LES LAUNCH ESCAPE TOWER		
COMMAND MODULE		
COMMAND PILOT		
SENIOR PILOT		
PILOT		
SERVICE MODULE		
CARRY ON UMBILICAL	3757.17	95.432
FLY AWAY UMBILICAL	3760.92	95.527
FUEL SUMP TANK		
H_2 CRYOGENIC STORAGE TANK		
LUNAR MODULE (GRUMMAN AIRCRAFT ENGINEERING)		
RCS THRUSTER ASSEMBLY 4 PLACES		
L/M UPPER DOCKING TUNNEL		
L/M ASCENT STAGE		
L/M DESCENT STAGE		
L/M LANDING GEAR 4 PLACES		
INSTRUMENT UNIT (IBM)		
S-IVB (DOUGLAS)		
LH_2 TANK VENT	3203.56	81.370
ACCESS PLATFORM SUPPORT FITTING	3161.56	80.303
ANTENNAS CENTERLINE	3193.56	81.116
COLD HELIUM SPHERES (8)		
LOX TANK PROBE		
LOX TANK		
LINE FAIRING LH_2 FILL & DRAIN		
TOP OF AFT SKIRT	2832.00	71.933
LOX LH_2 FILL & DRAIN	2760.05	70.105
RETRO ROCKET (4 PLACES)		
BOTTOM OF AFT SKIRT	2746.50	69.701
ACCESS PLATFORM SUPPORT FITTING	2664.33	67.674
S-II (NORTH AMERICAN AVIATION)	INCHES	METERS
SYSTEMS TUNNEL		
LH_2 VENT		
S-II TOP FORWARD SKIRT	2519.00	63.982
RADIO COMMAND ANTENNA 4 PLACES		
TELEMETRY ANTENNA 4 PLACES		
LOX TANK		
LOX PROPELLANT MANAGEMENT PROBE		
RING SLOSH BAFFLE		
LH_2 RECIRCULATION SYSTEM 5 PLACES		
LH_2 FILL & DRAIN		
DIVISION OF AFT SKIRT		
TOP OF AFT SKIRT	1890.00	48.006
BOTTOM OF SLOSH BAFFLE		
TOP ULLAGE ROCKET FAIRING MOTOR		
TOP OF THRUST CONE		
BOTTOM OF THRUST CONE		
S-IC (BOEING)		
TOP FORWARD SKIRT	1541.00	39.141
LOWER SECTION OF FORWARD SKIRT	1420.30	36.075
RING SLOSH BAFFLES		
LOWER SECTION OF HELIUM BOTTLES (4)	946.50	24.041
TOP OF INTERTANK ASSEMBLY	885.20	22.484
FUEL VENT LINE	696.00	17.678
ACCESS DOOR (FAR SIDE)		
LOX FILL & DRAIN (FAR SIDE)	794.18	20.172
LOX FILL & DRAIN (FAR SIDE)	776.18	19.715
BOTTOM OF INTERTANK ASSEMBLY	628.80	15.971
SLOSH BAFFLES		
FUEL FILL & DRAIN	130.00	3.302
RETRO ROCKETS (2 EACH 4 PLACES)		
BOTTOM OF FUEL TANK	225.00	5.715
TOP OF HEAT SHIELD	112.00	2.844
BOTTOM OF F-1 ENGINE (5 PLACES)	-115.36	-2.930

S-IVB INCHES	S-IVB METERS
657.70	17.188
286.15	7.268
214.19	5.440
200.05	5.096

XB STA INCHES	XB STA METERS
938.50	23.837
942.00	23.926
955.00	24.257
923.00	23.444
902.00	22.910
357.00	9.067
366.60	9.311
341.00	8.661
283.00	7.188
326.00	8.280
284.00	7.213
176.68	3.725
223.00	5.664
112.00	2.844
-23.00	-0.584

VEHICLE STATIONS IN:	INCHES	METERS
SPACECRAFT		
VEHICLE STATION	4240.79	107.716
BASE OF CONARD NOSE CONE	4203.73	106.774
CENTERLINE LAUNCH ESCAPE MOTOR	4185.53	106.312
BOTTOM OF LES SKIRT	3960.03	100.585
TOP OF BOOST COVER	3890.03	98.527
VEHICLE SEPARATION	40.03	97.536
AFT HEAT SHIELD	3749.56	95.239
REACTION CONTROL SYSTEM MODULE	3715.45	94.372
VEHICLE STATION FLIGHT SEPARATION	3594.55	91.301
VEHICLE SEPARATION	3593.50	91.275
PROPULSION MOTOR		
RENDEZVOUS RADAR ANTENNA		
LUNAR MODULE		
L/M FORWARD DOCKING TUNNEL		
VEHICLE SEPARATION	3340.05	84.837
VEHICLE STATION	3285.19	83.443
INSTRUMENT UNIT INSTRUMENT UNIT TOP	3258.56	82.767
INSTRUMENT UNIT BOTTOM	3222.56	81.853
S-IVB		
TOP FORWARD SKIRT		
BOTTOM OF FORWARD SKIRT	3100.56	78.754
FUEL MASS SENSOR PROBE		
INSTRUMENTATION PROBE		
AUXILIARY PROPULSION SYSTEM (APS) (2)		
FLIGHT SEPARATION		
LOX VENT (FAR SIDE)	2759.00	70.078
HELIUM SPHERES (9 PLACES)		
TOP J-2 ENGINE	2645.85	67.204
J-2 ENGINE		
BOTTOM S-IVB TOP S-II	2519.00	63.982
S-II	INCHES	METERS
BOTTOM OF FORWARD SKIRT		
LH_2 PROPELLANT MANAGEMENT PROBE		
PRESSURIZATION MAST		
LOX VENT LINE		
TOP OF LH_2 FEED FAIRING 5 PLACES		
LOX TANK EQUATOR	1848	46.939
LOX FILL & DRAIN (FAR SIDE)		
CRUCIFORM BAFFLE		
BOTTOM LH_2 FEED FAIRING		
FLIGHT SEPARATION	1760.00	44.704
GIMBAL PLANE		
BOTTOM ULLAGE R M FAIRING		
J-2 ENGINES (5 PLACES)		
S-IC		
FLIGHT SEPARATION		
S-II INTERSTAGE BOTTOM	1541.00	39.141
LOX VENT	1521.00	38.633
GOX LINE	1511.75	38.398
Y RING	1404.00	35.661
PRESSURIZATION TUNNEL (2 PLACES)		
LOX FEED LINE TUNNEL (5 PLACES)		
Y RING	909.00	23.088
BOTTOM OF LOX TANK	772.00	19.608
TOP OF FUEL TANK	742.00	18.846
FUEL PRESSURE LINE	692.80	17.576
Y RING	605.00	15.367
TOP OF ENGINE FAIRING	362.00	9.194
TOP OF THRUST STRUCTURE	345.70	8.780
INTERCONNECT LOX DRAIN	130.00	3.302
BOTTOM OF ENGINE FAIRING	48.50	1.231
BOTTOM OF THRUST STRUCTURE	116.00	2.946
GIMBAL	100.00	2.540

S-IVB INCHES	S-IVB METERS
676.70	17.188
554.70	14.089
213.15	5.414
100.00	2.540
-26.98	-.682

XB STA INCHES	XB STA METERS
823.00	20.904
451.75	11.474
207.00	5.257
173.00	4.394
158.00	4.013
196.00	4.978
100.00	2.540
-0.44	-.011
0.00	0.000
-23.00	-0.584

POS II

POS III

NOTE: S-IC STAGE ROTATED 45° COUNTER CLOCKWISE FOR CLARITY

ISOMETRIC SCALE

100 0 100 200 300 400 500 INCHES

2 1 0 1 2 3 4 5 6 7 8 9 10 11 12 13 METERS

196.85 393.70 511.81

SHEET 1 OF 2 SATURN APOLLO 500 SERIES

THE BOEING COMPANY
SPACE DIVISION, LAUNCH SYSTEMS BRANCH
HUNTSVILLE, ALA 35807

SATURN V APOLLO
FLIGHT CONFIGURATION

THE HEROICRELICS WEB SITE
RELICS OF THE HEROIC AGE OF MANNED SPACE FLIGHT
HTTP://HEROICRELICS.ORG

DRAWING ORIGINATED BY:	DATE: 1 JANUARY 1968
HUNTSVILLE ENGINEERING	DRAWN BY: DON SPRAGUE

FOR ADDITIONAL COPIES CONTACT
PUBLIC RELATIONS OFFICE, P. O. BOX 1680
OR PHONE 205-895-0520