

# Design of a Portable Control Platform for Rod-Driven Continuum Parallel Robots

Josué Licona Mármol

*A graduation project submitted in partial fulfillment  
of the requirements for the degree of*

Bachelor of Science in Mechanical Engineering

*Supervisor*

Jonathan Camargo Leyva, M.Sc.



Department of Mechanical Engineering  
Universidad de los Andes  
Bogotá D.C., Colombia  
June XX, 2024

*To my mother, Gildes Ester.*

Success is the sum of small efforts, repeated day in, and day out.

— Robert Collier

# Abstract

This project focuses on the design and development of a portable, modular, and scalable platform and control system for the actuation of rod-driven continuum parallel robots. The primary objective was to create a versatile mounting solution that enables the efficient movement of such robots in various applications. The platform facilitates the deployment and operation of the robots in diverse environments, providing flexibility and ease of use.

The project involved the design and construction of the mounting platform, as well as the development of the control interface. Additionally, a rod-driven continuum parallel robot was designed and implemented, with a focus on miniaturization and optimization of the structure. The novel approach involved wire structures interconnected by rings to restrict rod movement, with innovative ring joints designed to enhance stability and performance.

# Acknowledgements

I want to thanks to God...

# Contents

<b>List of Figures</b>	<b>5</b>
<b>List of Tables</b>	<b>6</b>
<b>1 Introduction</b>	<b>7</b>
1.1 Objectives . . . . .	10
1.1.1 General Objective . . . . .	10
1.1.2 Specific Objectives . . . . .	10
<b>Bibliography</b>	<b>12</b>

# List of Figures

1.1	Traditional parallel robots . . . . .	8
1.2	Continuum robots with extrinsic actuation . . . . .	9

# List of Tables

# Chapter 1


## Introduction

Robots in general can be categorized into serial and parallel types. Serial robots are characterized by a series of linked joints while parallel robots have multiple axes that move in parallel, usually working together to support a single platform.

Parallel robots represent a significant branch in the field of robotics due to their precision and versatility in various applications such as pick-and-place manipulation, simulators, manufacturing, and tooling, among others. As described in [4], these applications span both industry and medicine, leveraging the high rigidity, precision, and speed of these robots to compensate for the performance limitations of serial robots.

The origin of parallel robots dates back to the 1960s with the development of the Gough-Stewart [5] parallel mechanism (Figure 1.1a), which has become one of the most iconic in the field of parallel robotics. Later, in the 1980s, Reymond Clavel designed a robust parallel structure with three translational degrees of freedom and one rotational degree of freedom, as illustrated in Figure 1.1b. This robot, known as the Delta Robot, has become one of the most significant examples in the field of parallel robotics.



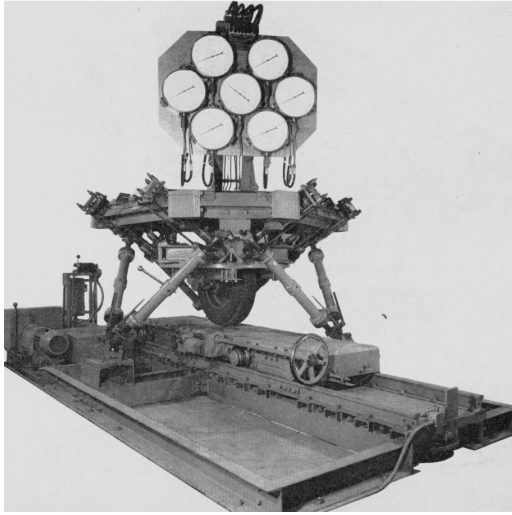

(a). Gough-Stewart Platform

Source: Adapted from [5]



(b). Clavel's Delta Robot


Source: Adapted from [2]

Figure 1.1: Traditional parallel robots


Another distinguishing feature of these robots is the presence of multiple closed kinematic chains that connect and move the mobile platforms, in contrast to serial robots, which operate with an open kinematic chain and move in a linear sequence. However, according to Briot and Kahrs[1] the fundamental questions about this class of robots have been addressed. As a result, in recent years, interest in parallel robots has shifted towards exploring new alternatives.

Current research in robotics transcends conventional definitions, pushing the boundaries of this field and fostering new possibilities and innovations. Briot and Kahrs [1] illustrate how parallel manipulators have been integrated into various novel robot types, such as continuum robots, flying robots, cable-driven robots, underactuated robots, multi-fingered hands, and micro-scale parallel robots. However, this emerging class of robots presents significant scientific challenges in design, modeling, and control. Among these categories, aerial robots, parallel robots, and continuum or soft robots are particularly noteworthy for their ability to venture into new areas due to their lightness and flexibility.


Expanding on these insights, Russo et al. [3] offer a comprehensive review

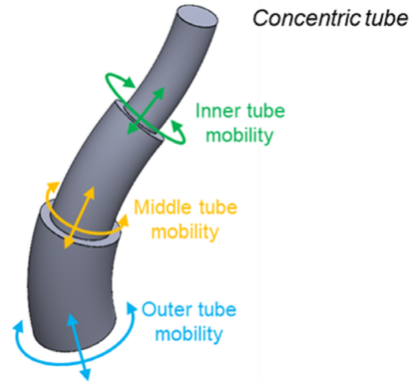


(a). Concentric tube robot mobility

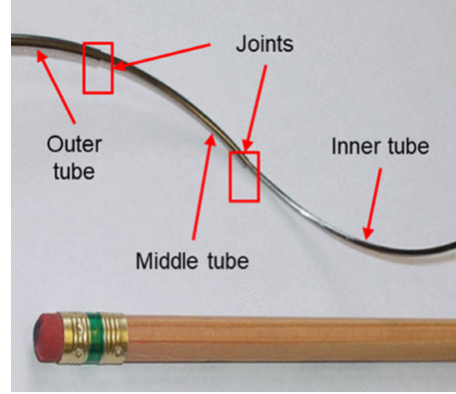

(b). Concentric tube prototype

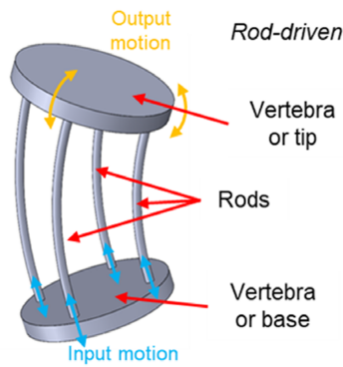

(c). Rod-driven continuum robot conceptual scheme

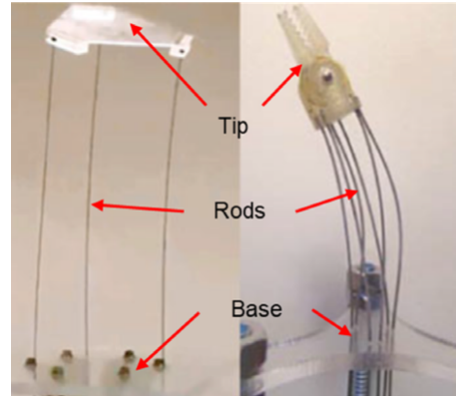

(d). Parallel continuum rod-driven robot prototype

Figure 1.2: Continuum robots with extrinsic actuation

Adapted from

focusing on recent advancements, current limitations, and ongoing challenges in the design, modeling, and control of continuum robots. They classify continuum robots based on their design, distinguishing them by their extrinsic or intrinsic actuation methods. Extrinsic actuation (Figure 1.2) involves transmitting motion from the robot's base along its structure, categorized into three main families depending on the transmission elements used: tendon-driven, concentric tube (Figures 1.2a, 1.2b), and rod-driven robots (Figures 1.2c, 1.2d). Furthermore, robots with intrinsic actuation employ actuators integrated into their structure to generate movement, meaning the actuation occurs within the robot's body.

Current challenges in designing and modeling parallel continuum robots in-

clude improving performance through miniaturization of actuators, integrating with rigid robots, exploring smart materials, precise environmental modeling, and implementing proprioception with new sensors [3]. Modeling efforts also focus on representing interaction environments and improving real-time implementations, alongside standardizing simulation environments. Control challenges involve ensuring precise manipulation and adapting to dynamic environments using advanced sensor technology and adaptive strategies

This project aims to address the efficiency challenges of continuum robots through the miniaturization of their parallel linear actuators. Specifically, it focuses on implementing adaptive control strategies for diverse applications using an extrinsic actuation platform for rod-driven continuum robots. This research endeavors to enhance affordability and user-friendliness, aiming to broaden adoption and usability in practical contexts.

## **1.1 Objectives**

### **1.1.1 General Objective**

To design and develop a portable, modular, and scalable platform with a control system for the actuation of rod-driven continuum parallel robots.

### **1.1.2 Specific Objectives**

- Adapt an existing design of a rod-driven continuum parallel robot, optimizing it for reduced size while maintaining functionality and performance.
- Design linear actuators that provide precise control and enable dexterous movements, ensuring high accuracy and reliability.
- Fabricate all necessary components and assemble a fully functional physical

prototype of the platform, adhering to the design specifications.

- Implement a customized language specification for programming the linear actuators, allowing for tailored control and flexibility in operations.
- Develop an application to interface with the control system, utilizing the created protocol to facilitate seamless communication and control.
- Conduct comprehensive experimental testing and validation of the system, ensuring it meets all performance criteria and operational standards.

# Bibliography

- [1] Sebastien Briot and Jessica Burgner-Kahrs. “Editorial: New frontiers in parallel robotics”. In: *Frontiers in Robotics and AI* 10 (2023). ISSN: 2296-9144. DOI: 10.3389/frobt.2023.1282798. URL: <https://www.frontiersin.org/articles/10.3389/frobt.2023.1282798>.
- [2] EPFL News. *The Delta robot – Swiss-made and fastest in the world!* URL: <https://actu.epfl.ch/news/the-delta-robot-swiss-made-and-fastest-in-the-world/>.
- [3] Matteo Russo et al. “Continuum Robots: An Overview”. In: *Advanced Intelligent Systems* 5.5 (2023), p. 2200367. DOI: <https://doi.org/10.1002/aisy.202200367>. eprint: <https://onlinelibrary.wiley.com/doi/pdf/10.1002/aisy.202200367>. URL: <https://onlinelibrary.wiley.com/doi/abs/10.1002/aisy.202200367>.
- [4] Zhufeng Shao, Dan Zhang, and Stéphane Caro. “New Frontiers in Parallel Robots”. In: *Machines* 11.3 (2023). ISSN: 2075-1702. DOI: 10.3390/machines11030386. URL: <https://www.mdpi.com/2075-1702/11/3/386>.
- [5] D. Stewart. “A Platform with Six Degrees of Freedom”. In: *Proceedings of the Institution of Mechanical Engineers* 180.1 (1965), pp. 371–386. DOI: 10.1243/PIME\_PROC\_1965\_180\_029\_02. URL: [https://doi.org/10.1243/PIME\\_PROC\\_1965\\_180\\_029\\_02](https://doi.org/10.1243/PIME_PROC_1965_180_029_02).