



kW	ESP	3
kW	PRP	2.8
Hz	FRECUENCY	50/60
	FUEL	GASOLINE
V	VOLTAGE	230/130

SPECIFICATIONS


Engine	SC230
Fuel Type	Gasoline
Engine displacement (cc)	223cc
Power	4.8kW/3600rpm
Starting System	Hand Starting
Rated Voltage	230V(120V Optional)
Frecuency (Hz)	50 Hz (60Hz Optional)
Rated Power	2.8 Kw
Max Power	3 Kw
T.H.D	≤ 5%
Oper Circuit Voltage	DC 50V
Welding Current	70A/130A
Rated Welding Current/Voltage	120A/130A
Rated Current Load Duration	50%
Applicable Electrode Diameter	1.6-3.2mm
Type of Weldable Electrode	Acid Electrode Alkaline Electrode
Starting System	MANUAL START
Duty cycle:	130A/25.2V at 60%
Fuel consumption (75% PRP)	1.9 L/h

CHARACTERISTICS

- Permanent magnet intermediate frequency motor, high conversion efficiency, light weight
- Power generation AC output, waveform distortion rate ≤ 5%
- Fresh air duct design, lower motor temperature rise
- Power output rated at 2kW

LOGISTICS INFORMATION

Tank Volume	3.6L
Size	470x415x500mm
N.W	33Kg

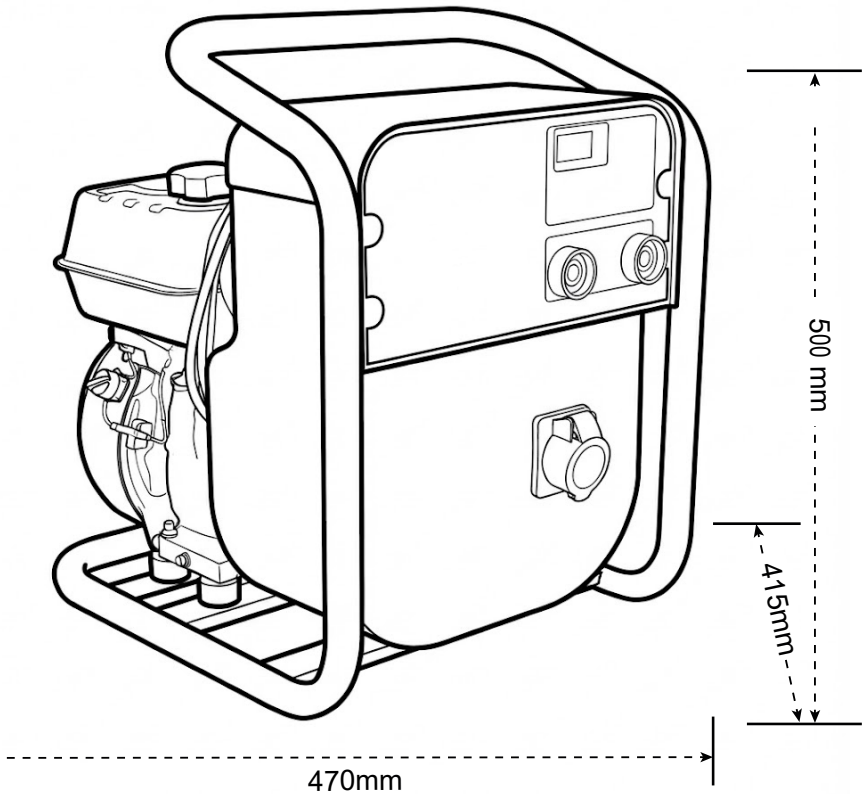

WARRANTY

All devices are covered by the manufacturer's warranty.