



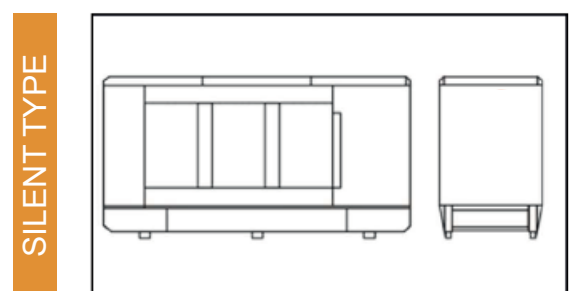

POWER	PRP		ESP		PRIME
VOLTAGE(V)	kW	kVA	kW	kVA	Amps
380/220	184	230	200	250	349.5
400/230	184	230	200	250	332.0
415/240	184	230	200	250	320.0

WEIGHT AND DIMENSIONS

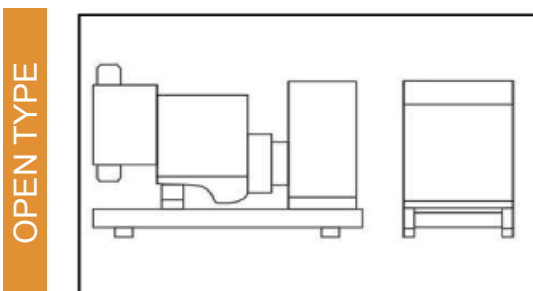

	Length	Width	Height	Weight	Fuel tank	Sound level
	mm	mm	mm	kg	L	(dB(@7m))
Open Type	2850	1040	1580	--	--	≤87
Silent Type	3920	1180	1900	2750	450	≤75

DIESEL ENGINE
WATER COOLED
ELECTRICAL SYSTEM

AIR FILTER
RADIATOR
GOVERNOR

HOT PROTECTION
MOVING PARTS PROTECTION
RADIATOR WATER LEVEL SENSO (OPT)

ENGINE-BAUDOUIN

Model	6M16G250/5	Start motor	24V
Aspiration	Turbocharged&Aftercooled	Oil capacity high	22L
Fuel system	Mechanical Pump+RSUV	Maximum Oil Temperature	105°C
No. cylinders	6	Oil pressure	1.3-5.8Bar
Displacement	9.726L	Air intake restriction-dirty filter	≤70mBar
Bore*Stroke	126*130mm	Air intake restriction-clean filter	≤35mBar
Compression ratio	17:1	Intake air flow	14.4m³/min
Rated speed	1500r/min	Exhaust gas flow	39.6m³/min
Gross Engine Output	216Kw	Exhaust gas temp	600°C
Governor type	Electronic	Max back pressure	60mBar
50% (Prime power)	25.8L/h	Coolant capacity	13L
75% (Prime power)	38L/h	Thermostat operating range	71-82°C
100% (Prime power)	50.9L/h	Max top tank temperature	105°C

ALTERNATOR

Wiring type	3 Phase 4 Pole, Y type	Exciter type	Brushless, self-excitation
Bearing	1	Voltage regulation	± (0.25%~1%)
Power factor	0.8	Protection grade	IP 23
Frequency	50Hz	Insulation class	H
Overspeed	2250 RPM	Altitude(m)	≤1000

PROTECTIVE FUNCTIONS

Low oil pressure

High water temperature

High/low voltage

High Engine Temperature and Overspeed

Voltage regulator and frequency regulator

Emergency stop

Start failure

Baudouin Engine 12 months from date of purchase and and 1000 hours

Generator 12 months from date of purchase or 1000 hours (whichever occurs first)

Standard Features

Zinc-coated steel	●
Radiator 50°C max, fans are driven by belt	●
Charge alternator	●
Alternator: single bearing alternator IP23, insulation class H/H	●
Standard auto control system	●
One set of air filter, fuel filter, oil filter	●
Molded case circuit breaker (MCCB) 4P	●
Extra large fuel tank	●
Batteries, rack and cable	●
Exhaust system (Ripple flex exhaust pipe, flange, muffler)	●
User manual	●
Water oil separator	●
Battery charger	●
Engine heater	●

Options

Alternator heater	○
PMG	○
Daily fuel tank	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○

STANDARD ●

OPTIONAL ○

GENERATOR CONTROL



DSE6120

Verification to standard:

EN ISO 3744:2010

Related to CE directive(s):

2000/14/EC (Noise)

European Directives:

The EMC Directive 2014/30/EU

EN 55012:2007+A1:2009

QUALITY STANDARDS AND REGULATIONS

LK ENERGY with quality certification ISO 9001, ISO 14001, ISO 45001

LK ENERGY is compliant with EC mark which includes the following directives:

Verification to standard:

BS EN ISO 12100:2010, BS EN ISO 8528-13:2016, BS EN 60204-1:2018, BS EN IEC 61000-6-2:2019, BS EN IEC 61000-6-4:2019

Related to GRB regulation:

Supply of Machinery (Safety) Regulations 2008
Electromagnetic Compatibility Regulations 2016