



THREE PHASES



50 HZ

POWER	PRP		ESP		PRIME
VOLTAGE(V)	kW	kVA	kW	kVA	Amps
380/220	108	135	120	150	205.1
400/230	108	135	120	150	194.9
415/240	108	135	120	150	187.8

RENTAL RAGE

LKENERGY with quality certification ISO 9001, ISO 14001, ISO 45001

LKENERGY is compliant with EC mark which includes the following directives:

Verification to standard:

BS EN ISO 12100:2010, BS EN ISO 8528-13:2016, BS EN 60204-1:2018, BS EN IEC 61000-6-2:2019, BS EN IEC 61000-6-4:2019

Related to GRB regulation:

Supply of Machinery (Safety) Regulations 2008
Electromagnetic Compatibility Regulations 2016

Verification to standard:

EN ISO 3744:2010

Related to CE directive(s):

2000/14/EC (Noise)

European Directives:

The EMC Directive 2014/30/EU
EN 55012:2007+A1:2009



DEEPSEA DSE6120

**DIESEL ENGINE
WATER COOLED
ELECTRICAL SYSTEM**

**AIR FILTER
RADIATOR
GOVERNOR**

**HOT PROTECTION
MOVING PARTS PROTECTION
RADIATOR WATER LEVEL SENSO (OPT)**

ENGINE-BAUDOUIN

Model	6M11G150/5	50% (Prime power)	15.9L/h
Aspiration	Turbocharged&Aftercooled	Oil capacity high	20L
Fuel system	Mechanical Pump	Maximum Oil Temperature	105°C
No. cylinders	6	Oil pressure	1.2-6Bar
Displacement	6.75L	Air intake restriction-dirty filter	≤60mBar
Bore*Stroke	105*130mm	Air intake restriction-clean filter	≤35mBar
Compression ratio	18:1	Intake air flow	8.41m³/min
Rated speed	1500r/min	Exhaust gas flow	21.82m³/min
Gross Engine Output	128Kw	Exhaust gas temp	550°C
Governor type	Electronic	Max back pressure	60mBar
Start motor	12 V	Coolant capacity	13L
100% (Prime power)	30.2L/h	Thermostat operating range	76-90°C
75% (Prime power)	23L/h	Max top tank temperature	105°C

ALTERNATOR

Wiring type	3 Phase 4 Pole, Y type	Exciter type	Brushless, self-excitation
Bearing	1	Voltage regulation	± (0.25%~1%)
Power factor	0.8	Protection grade	IP 23
Frequency	50Hz	Insulation class	H
Overspeed	2250	Altitude(m)	≤1000

PROTECTIVE FUNCTIONS

Low oil pressure

High water temperature

High/low voltage

High Engine Temperature and Overspeed.

Voltage regulator frequency regulator


Emergency stop

Start failure

Baudouin Engine 12 months from date of purchase and and 1000 hours

Generator 12 months from date of purchase or 1000 hours (whichever occurs first)

DIMENSIONS

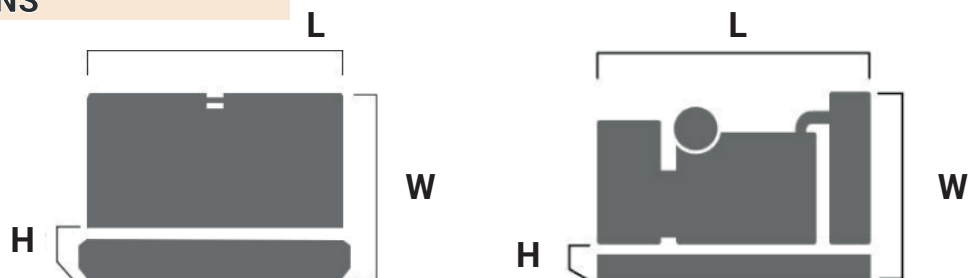

WEIGHT AND DIMENSIONS

	Length	Width	Height	Weight	Fuel tank	sound level
	mm	mm	mm	kg	L	(dB(@7m))
Open Type	2400	950	1510	--	--	≤87
SDF Type	3070	1080	1450	1990	210	≤75
SA Type	3288	1130	1850	--	280	≤75
SL Type	3400	1130	1750	780	342	≤75

Standard Features

Engine(Baudouin)	●
Radiator 50°C max,fans are driven by belt	●
Alternator: single bearing alternator IP23,insulation class H/H	●
Standard auto control system	●
One set of air filter, fuel filter, oil filter, MCCB	●
Fuel tank	●
Batteries, rack and cable	●
Exhaust system(Ripple flex exhaust pipe, flange, muffler)	●
User manual	●
Water oil separato	●

Options

Battery charge	○
Engine heater. Alternator heater PMG	○
Daily fuel tank	○
Remote control panel	○
Automatic transfer switch/ATS	○
Switch box	○

STANDARD ●

OPTIONAL ○